

INSTRUCTION SHEET - FORM NO. VG/TD-PT (FS)

CAUTION: *TURN POWER OFF AT THE MAIN BREAKER PANEL OF FUSE BOX PRIOR TO THE ELECTRICAL HOOKUP OF THIS OR ANY ELECTRIC FIXTURE.*

PLEASE NOTE: For safety and ease of installation it is recommended that at least two (2) people be used for the electrical hookup of this fixture: Steps #6 thru #8.

ASSEMBLY AND INSTALLATION INSTRUCTIONS:

1. Remove the Lantern and Parts Bag from carton.

Parts bag contains:

- | | |
|-----------------------|--------------------------|
| (1) Decorative Finial | (1) ½" Long Steel Nipple |
| (1) Locknut | (1) Slotted Set Screw |


2. Release latch and open the canopy on top of the lantern.
3. Screw the Locknut to one end of the ½" Steel Nipple and insert the Nipple through the hole in the top of the Canopy.
4. Attach the Finial to the nipple by finger-tightening in a clockwise direction.
5. FOR MODELS WITH A GLASS CHIMNEY ONLY: Remove the Chimney from the fixture and discard the corrugated stuffer. (**DO NOT** replace Chimney in fixture at this time).
6. Using approved Wire Connectors (furnished), connect the Black wire from the Lantern to the Black incoming power wire; connect the White wire from the Lantern to the White incoming power wire; connect the Green ground wire from the Lantern to the incoming ground wire.

RECHECK ALL ELECTRICAL CONNECTIONS FOR LOOSE OR EXPOSED WIRES!!

7. Place the Lantern on top of post and press down into the desired position.
8. Screw the Slotted Set Screw into the threaded hole in the base of the Lantern.
DO NOT OVERTIGHTEN.
9. Carefully install the RECOMMENDED MAXIMUM WATTAGE BULB INTO THE LANTERN SOCKET AND REPLACE THE GLASS CHIMNEY WHEN APPLICABLE.

10. Close the canopy on top of the lantern, making sure latch is secure.

11. Turn the power on at the main control panel only after the installation is complete.

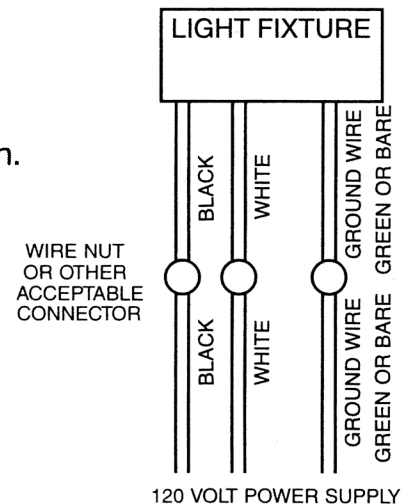

ALWAYS CONNECT BLACK TO BLACK, WHITE TO WHITE, AND BARE OR GREEN GROUNDING CONDUCTORS

Customer Service **1-877-870-9283**
www.wavelighting.com