


- LED & HID Models
- 0-10V Dimming LED Options
- DLC LED Lamp Available

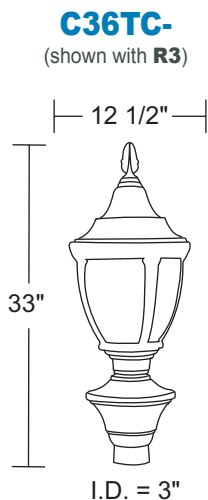

**LED**  
**COMMERCIAL**  
system

Commercial LED standard in 4000K, Type V, other options available upon request.  
Integral surge suppression.  
5 year warranty on LED components.

**C37TL-**



## GUIDE: C36TC-L40C-BK



ITEM #	LENS	LIGHT SOURCE	COLOR
<b>C36T</b> <b>C37T</b>	<b>ACRYLIC</b> L-Opal C-Clear	<b>LED LIGHT SOURCE</b>	<b>BK</b> -Black <b>BZ</b> -Bronze <b>WH</b> -White
		<b>120-277v DEDICATED LED</b> <b>L40</b> -40W 4000lm <b>L60</b> -60W 6000lm <hr/> <b>E39 CORN COB LED 100-277v</b> <b>LC5</b> -54W 7290lm, Type 5 ☆ <b>LC3</b> -40W 5600lm, Type 3 ☆ <b>LCD</b> -54W 5900lm, Dark Sky ☆	
		<b>CCT</b> <b>C</b> -4K <b>W</b> -3K <b>B</b> -5K <hr/> <b>CCT</b> <b>C</b> -4K(standard)	



4Kv medium base socket standard in HID, Mogul Upon Request.

120V HPF integral ballast standard in HID models, specify voltage for multi-tap.

★ **Lamp Included**

## GUIDE: C36TC-150MH-BK-R3



ITEM #	LENS	LIGHT SOURCE	COLOR	OPTIONS
<b>C36T</b> <b>C37T</b>	<b>ACRYLIC</b> L-Opal C-Clear	<b>INCANDESCENT</b> (1) 200W MAX Medium Base <b>HPF MAGNETIC BALLAST</b> <b>100MH</b> -(1) 100W Metal Halide ☆ <b>150MH</b> -(1) 150W Metal Halide ☆ <b>100H</b> -(1) 100W HPS ☆ <b>150H</b> -(1) 150W HPS ☆	<b>BK</b> -Black <b>BZ</b> -Bronze <b>WH</b> -White	<b>DSR</b> -Dark Sky Reflector <b>MG</b> -E39 Mogul Socket <b>MT208</b> -208v Multi-Tap <b>MT240</b> -240v Multi-Tap <b>MT277</b> -277v Multi-Tap <b>R3</b> -Type III Refractor <b>R5</b> -Type V Refractor (See Page 70 for Light Distribution)

SPEC SHEETS AND IES FILES AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.