


POST TOP FIXTURE C2015T/C8015T

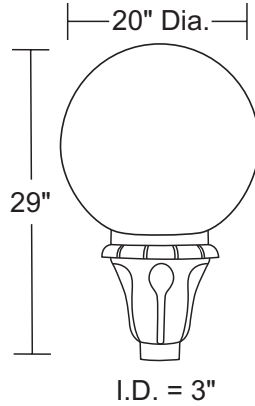

**EPA 1.1ft²
WT 16 lbs**

IES FILES AVAILABLE ONLINE
AT WAVELIGHTING.COM

Wave Lighting's commercial product line provides safety and security for all types of applications including parks, pedestrian walkways, and parking areas. Our Post top fixtures fit on any standard 3" diameter commercial pole (sold separately) with 3 set screws and allen wrench (provided). Standard 8" fitter neck diffuser is easily removed by loosening 3 set screws (provided).

LIGHT SOURCE OPTIONS

DEDICATED LED SYSTEM - L

- 120-277V, 50/60Hz
- 150W or 250W Metal Halide Equivalent
- Estimated 100,000 Hrs L₈₀
- Surge Supression
- 3000K*, 4000K, or 5000K* CCT, 80CRI
- Type 3* or Type 5 Distribution
- 0 - 10V Dimming
- 5 Year Warranty
- DLC Listed Module in L40C & L60C Models Only**

REPLACEABLE LED CORN COB - LC

- 100-277V, 50/60Hz
- 250W Metal Halide Equivalent Lamp Included
- E39 Mogul Base Socket
- Estimated 50,000 Hrs L₇₀
- Surge Supression
- Available in 4000K CCT 80CRI
- Type 3, Type 5, or Dark Sky Distribution
- 5 Year Warranty
- DLC Listed Lamps in LC5, LC3, & LCD Models Only**

HID SYSTEM - MH/H

- Multi-Tap Magnetic Ballast, 120-277V Option
- Metal Halide or High Pressure Sodium
- Up To 150W Lamp Included
- 4kV Medium Base Socket, Mogul On Request
- Type 3, Type 5, or Dark Sky Friendly Distribution
- 1 Year Warranty



SPECIFICATIONS

- Cast Aluminum Housing
- Stainless Steel Set Screws
- Black, White, or Bronze Finish
- Polycarbonate or Acrylic Globe Diffuser
- Clear, Opal, Smoke or Clear Prism Diffuser Options
- UL Listed For Wet Locations

GUIDE: C2015TC-L40C-BK

CALL FOR PHOTOMETRIC INFORMATION

ITEM #	ACORN	LIGHT SOURCE	COLOR	HID OPTIONS	
C2015T	POLYCARBONATE C -Clear L -Opal S -Smoke P -Clear Prism	INCANDESCENT (1) 200W MAX Medium Base HPF MAGNETIC BALLAST 100MH -(1) 100W Metal Halide ☆ 150MH -(1) 150W Metal Halide ☆ 70H -(1) 70W HPS ☆ 100H -(1) 100W HPS ☆ 150H -(1) 150W HPS ☆	BK -Black BZ -Bronze WH -White	DSR -Dark Sky Reflector HS -House Shield MG -Mogul Socket MT -Multi-Tap <small>(Specify 208, 240, or 277v. Tapped at 120v by default)</small> R3 -Type III Glass Refractor R5 -Type V Glass Refractor	
		LED LIGHT SOURCE			
		DEDICATED LED SYSTEM L40 -40W 4000lm L60 -60W 6000lm REPLACEABLE LED CORN COB LC3 -Type 3, 40W 5600lm ☆ LC5 -Type 5, 54W 7200lm ☆ LCD -Dark Sky, 54W 5900lm ☆			CCT W -3K* C -4K B -5K*
		LED OPTIONS			
C8015T	ACRYLIC C -Clear L -Opal S -Smoke P -Clear Prism			T3 -Dedicated LED Type III Distribution* <small>(Type V Standard)</small> Not all options can be used in combination. Consult factory for details.	

**L40C (Standard V) models use DLC Listed lamp #D4-[F,M,S,H,C] 40-40K-T5M and L60C (Standard V) models use DLC Listed lamp #D4-[F,M,S,H,C] 60-40K-T5M

**LC5 models use DLC Listed lamp #GKS28-54W-02D4; LC3 models use DLC Listed lamp #GKS13-40W-06D3 & LCD models use DLC Listed lamp #GKS28-54W Plus(4000K)

* Special order item. Longer lead times may apply. Option not available in Replaceable Corn Cob model. ☆ Lamp Included