


# OUTDOOR POST FIXTURE S75TC/L-1



Wave Lighting's S75TC/L-1 adds a welcoming look to any outdoor space. This fixture can be used to comply with 2016 Title 24 Part 6 High Efficacy LED Light Source Requirements. Wave Lighting's S75TC/L-1 fits on a 3" diameter pole (sold separately) only mounting hardware is included. Options include photocell.

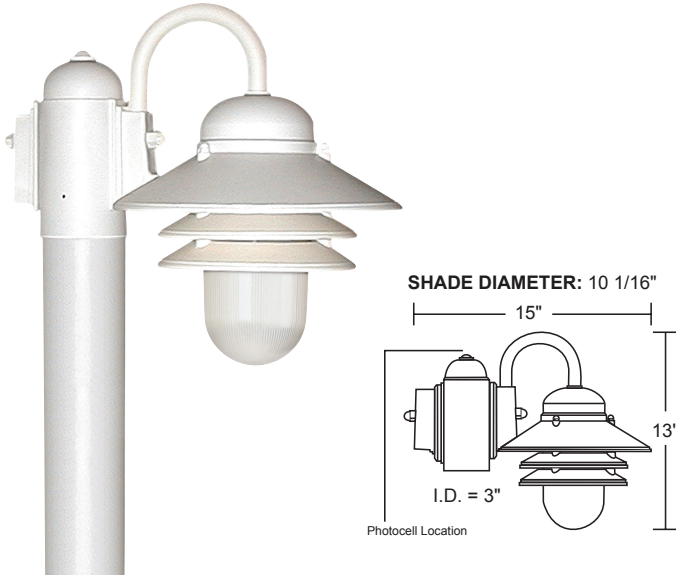

## LED SOURCE OPTIONS

### LIGHTWAVE LED - LR/LT

- 120V, 50/60 Hz
- AC Driver-On-Board Array
- Estimated 50,000 Hrs L<sub>70</sub>
- Low Flicker (LT models)
- Surge Suppression
- Dimmable (see compatible dimmer list)
- High Efficacy LED Light Source
- 3000K or 4000K CCT; 80 or 90CRI
- 5 Year Warranty

### LED MULTI-VOLT SYSTEM - L11

- 120-277V, 50/60Hz
- Estimated 50,000 Hrs L<sub>70</sub>
- 4000K CCT 80CRI
- 3 Year Warranty

### E26 REPLACEABLE LED - LE26

- 120V, 50/60Hz
- "Screw-In" Medium Base A19/E26 LED Lamp
- Estimated 15,000 Hrs L<sub>70</sub>
- Low Flicker (3K models)
- Dimmable (see compatible dimmer list)
- 3000K CCT 90CRI or 4000K CCT 80CRI
- 3 Year Warranty

## SPECIFICATIONS

- Black or White
- Mounting Hardware Included
- Clear Prismatic or Opal Acrylic Diffuser
- Post Mount Only
- Minimum Starting Temp -20°F
- UL Listed for Wet Locations

## GUIDE: S75TC-1-LR12W-BK

## CALL FOR PHOTOMETRIC INFORMATION

ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION	
S75T	ACRYLIC C-1-Clear Prismatic L-1-Opal	INCANDESCENT (1) 60W MAX Medium Base	BK-Black WH-White	PC-Photocell (NOT AVAILABLE W/ L11)	
		LED LIGHT SOURCE			
		LIGHTWAVE LED LR12-13W 1000lm 80CRI LT12-12W 1040lm 90CRI			CCT C-4K W-3K
		LED MULTI-VOLT SYSTEM L11-11W 912lm			4K
		E26 REPLACEABLE LED LE26-10W 800lm ☆	C-4K W-3K		

☆ Lamp Included

REFER TO CATALOG FOR OPTION SPECIFICATIONS - Specifications subject to change without notice - FIXTURE SPEC 1/19