


# INSTALLATION INSTRUCTIONS

READ IMPORTANT SAFETY TIPS BEFORE PROCEEDING WITH INSTALLATION


## SAFETY TIPS




Turn fixture off! (Place wall switch in off position, if fixture has built-in switch or chain pull, switch or pull chain so fixture is off.)




Next - go to the main fuse box. If your fuse box has an ON/OFF switch, simply place main power switch in OFF position.




Screw-in type fuses - unscrew the fuse or fuses that control the power to the fixture or room you are working in.

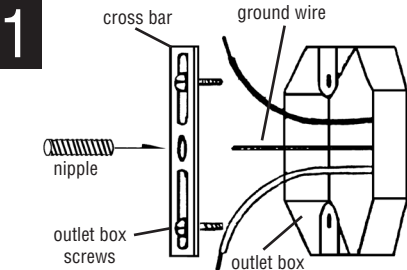


ATTACH cross bar to outlet box with outlet box screws (8-32 x 1/2, 2 slotted screws not provided)

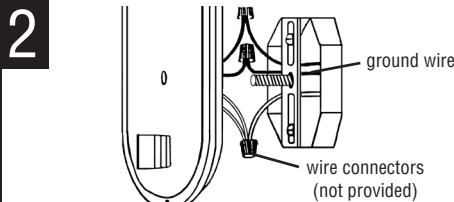

CONNECT THE WIRES. NOTE: Attach black fixture wire to black supply wire, white fixture wires to white supply wire and green or bare fixture ground to ground wire in outlet box or green ground screw on cross bar. NOTE: wire connectors not provided. NEVER CONNECT GREEN FIXTURE GROUND TO BLACK OR WHITE POWER SUPPLY WIRES.

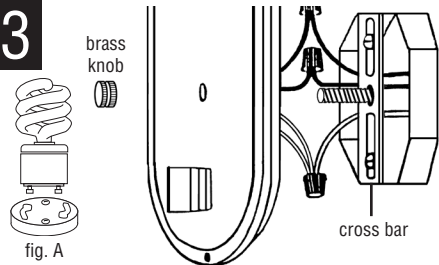

POSITION THE FIXTURE over the nipple and secure in place with brass knob. Insert lamp(s) into lampholder(s). Align and insert the round ended pins on the bottom of the self ballasted lamp into the circular opening in the lamp holder key hole slots, see figure A. Grasp the base and rotate clockwise. Be sure to use SBCFL with wattage no greater than specified for this fixture.

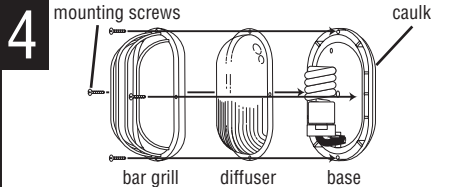

Place diffuser on fixture base. Then place bar grill or frame (depending on fixture model) over diffuser and attach to base with mounting screws (8-32x1/2, 4 combination head screw provided). NOTE: On models with hood, attach diffuser to base with one combination head mounting screw at center top of base only. Place hood over diffuser and secure to base with remaining three mounting screws. NOTE: Outdoor wall fixture **MUST** be caulked with an acrylic caulk where base of fixture meets mounting surface. This provides a water tight seal when fixture is installed.

**COLD WEATHER STARTING INFORMATION:** For temperatures below 0°F, leave the lamp on continuously - starting with warm lamps. NOTE: If lamp starting becomes a problem in any cold weather application, remove the lamp from the fixture - bring the lamp indoors so that it becomes warm - then reinstall the lamp into the fixture and leave the fixture on continuously. Do not place lamp in an oven, microwave or similar heat producing devices.

### BALLAST AND LAMP REPLACEMENT INSTRUCTIONS

Product contains an integrated Lamp/Ballast combination. To remove, grasp plastic area on each side of bulb area and rotate counterclockwise. Replace with MAX 27W SBCFL(GU-24) that is marked with the UL and C, US Logo. Use SBCFL marked - Not for use where directly exposed to water. Do not use SBCFL marked - Not for use in totally enclosed luminaire.

This fixture may have an integral photo sensor that turns the fixture off during the day and on at night. The photo sensor is not adjustable. The fixture could possibly cycle on and off due to light reflected from nearby surfaces into the photo sensor. If cycling occurs, remove the photo sensor nut and install the swivel hood and base. The hood and base are adjustable. The hood can be rotated and the base can be cut along the dotted line to reduce overall length. Check operation before cutting the base.



Clean only with mild soap and water. Avoid spraying with Cleansers, Insecticides, and Pesticides that a petroleum based hydrocarbon products. These will degrade Luminaire.



Mark means lamp contains Mercury. Follow disposal laws. See [www.lamprecycle.org](http://www.lamprecycle.org)