

Heavy Duty Cord Roman Blind

Fixing Instructions

WARNING

To avoid possible strangulation keep cords out of reach of children.




Parts Included in the Pack					
Size of Rail (cm)	Drop (cm)	Supports	Cords per Blind	Roman Blind Rods	Bottom Bar
60cms	240cms	2	2	5	1
90cms	240cms	3	3	5	1
120cms	240cms	3	4	5	1
150cms	240cms	4	5	5	1
180cms	240cms	4	6	5	1
210cms	240cms	5	7	5	1

All fixing screws & wall plugs provided


FIXING SUPPORTS

Mark and fix the supports in the desired position. Space the supports evenly and position one support close to the end of the rail for extra strength and stability.

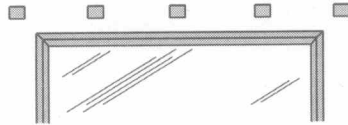


Practical Tip: Do NOT fix the rail to the supports until the blind is attached.

Click the rail to the supports by resting the rail onto position A and pressing back.

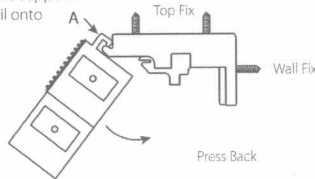


To remove the rail, press catch B and unclip the rail.

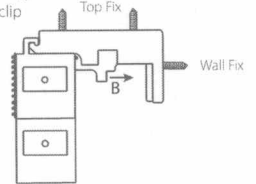

HANGING THE BLIND



- 1 Attach the Loop Tape to the back of the front blind, fix the curtain tape and blind rods to the back as normal.

Attach the front blind to the hook tape on the back of the rail as shown.

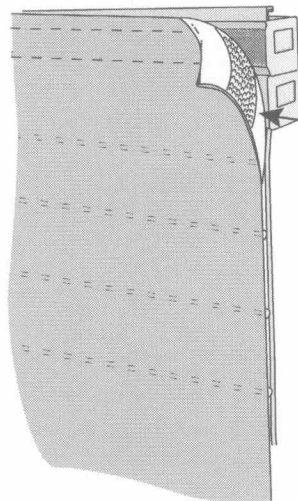


Loop Tape positioned on back of blind.


- 2 To secure the cords to the bottom of the blind, wrap the 5cms of excess cord around the cord lock and hook it into the curtain tape along the bottom edge of the material.

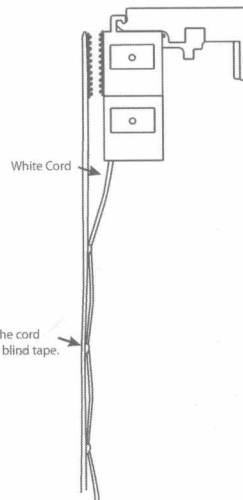


CUT TO SIZE

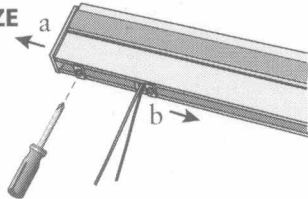

When cutting the rail cut from the end without the cords. Loosen the end cap screw as shown and slide out the end cap (a). If you are cutting a longer length, you may need to loosen the cord guide (b) and slide it out of the way before cutting.

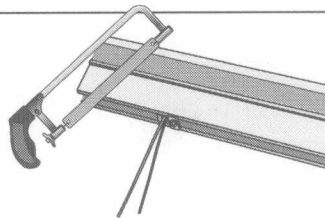

Cut the rail and replace the end cap.

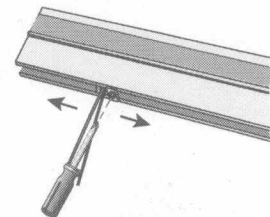

Please Note: After cutting you may need to re-position the cord guides so they are in line with the Roman Blind Tape Pockets. To do this simply loosen the screw and slide left or right before tightening the screw to secure in new position.