



## KEMPTEN Recessed Round Lights

A versatile architectural grade luminaire, this downlight features a premium design that is both flexible and elegant.



### KEY FEATURES

- Configurable trim for multiple applications
- Tiltable design with excellent cut-off illumination
- Engineered heat sink for optimum heat dissipation

### LIGHT SOURCE

Type	COB
Light Distribution	120D
CRI	80Ra / 90Ra
CCT	2700K, 4000K, 5000K

### PHYSICAL ASPECTS

Luminaire Material	Aluminium
Finishing	White
Optics (Lens/Reflector)	Aluminium Reflector
Ingress Protection IP	IP44


### ELECTRICAL SPECIFICATIONS

Input Voltage (V)	220-240VAC, 50/60Hz
Power Factor	0.9
THD	< 15%

### UPGRADEABLE OPTIONS

Dimming - Phase Cut/1-10V  
DALI Control  
Emergency - Power Pack

Further engineering data is available upon request.

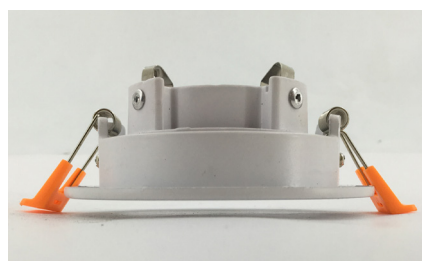

NAME	POWER	LUMENS	CUT-OUT SIZE	DIMENSIONS	PRODUCT CODE
KEMPTEN 8W	8W	800	-	ø50 x H71	LSSC-SPKMP01-0218
KEMPTEN 12W	12W	1200	-	ø50 x H79	LSSC-SPKMP01-0212
KEMPTEN ROUND	-	-	ø83	ø100 x H96	LSSC-SPKMP01-RND
KEMPTEN SQUARE	-	-	83 x 83	L100 x W100 x H96	LSSC-SPKMP01-SQE