

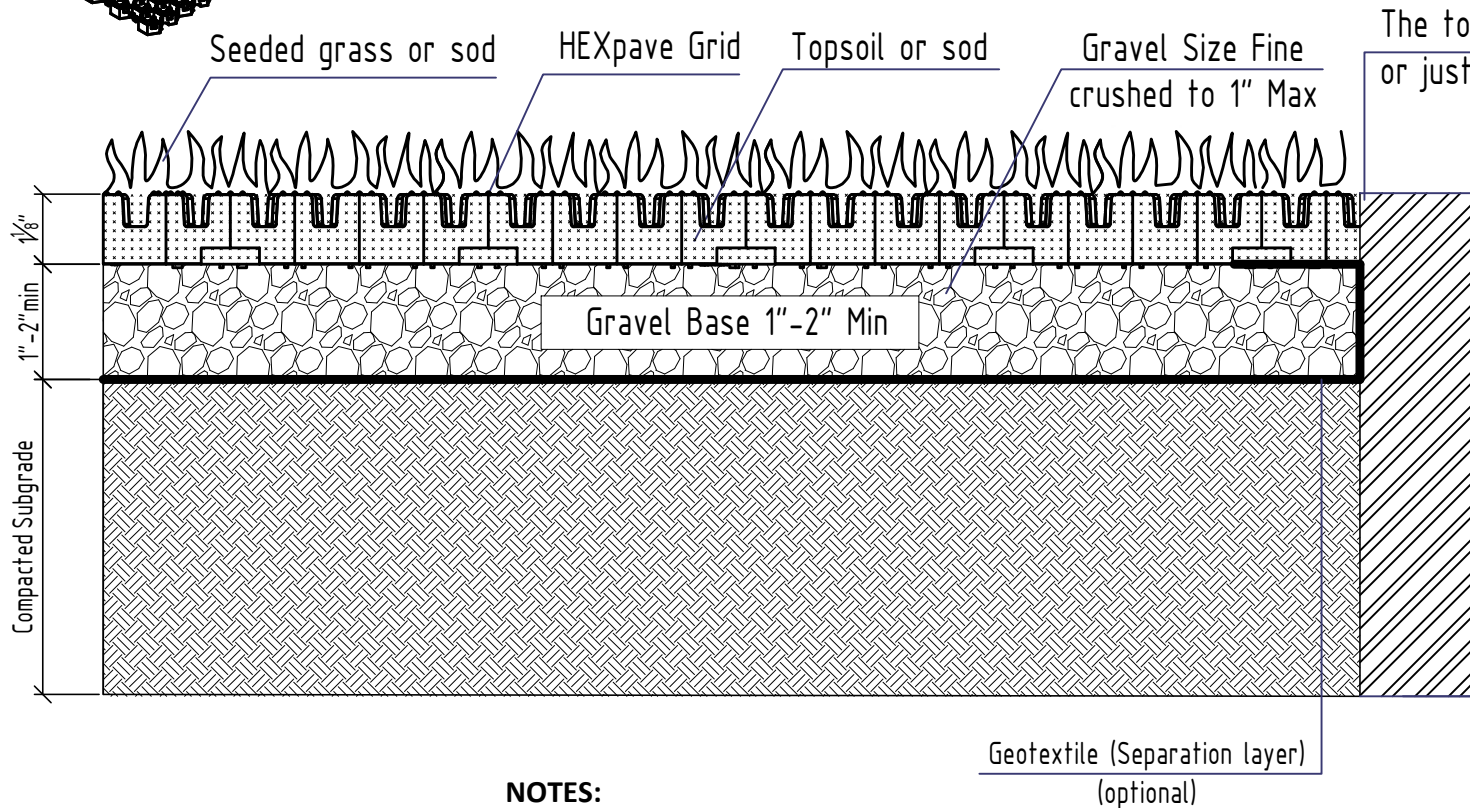


HEXpave Grass fill

Light Loads (under 1,000lbs)



HEXpave (art. 8102)

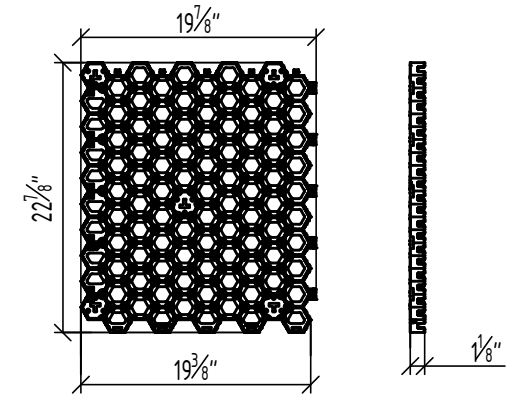

NOTES:

1. The base height shown in the cross-section depends on specific site and loading conditions.
2. Layers shown in cross-section need to be compacted.
3. Seeding: Fill the soil or growing area to the top of the grid. Apply seeding based on the instructions of the supplier.
4. Sodding: Fill Topsoil to half the height of the grid. Press sod within the grid so that the grid's top is leveled with the soil and roots. Only the grass's leaves should be extending above the grid.
5. Geo-textile is to be used for stability and to prevent mixing between layers (optional).
6. Anchors are recommended for slope installations of more than 10%.
7. This drawing is for conceptual design and information use only.

Application

Residential walkways, Pedestrian Zones, Erosion Control, Slope Stabilization

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		FINISH		DEBARR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
SURFACE FINISH									
TOLERANCES:								TITLE:	
LINEAR								HEXpave Grass fill (Light Loads)	
ANGULAR								ARTICLE:	
DRAWN	NAME	SIGNATURE	DATE						8102
CHECK									
APPROVED									
APPROVED						MATERIAL:	Plastic		