


# Oil and water Separator OilBase100 -1 (15) (S 1:16)

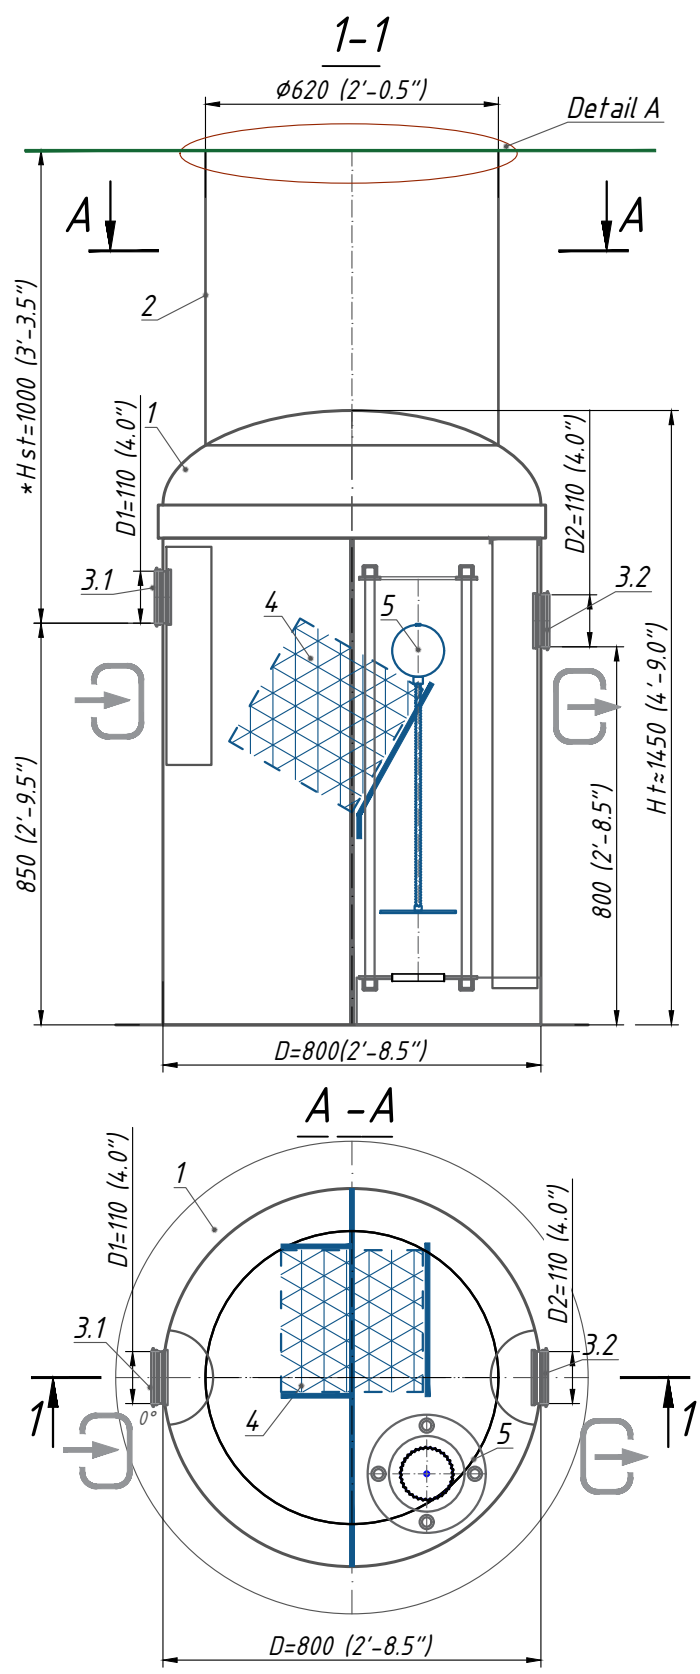


## Specification of materials and equipment. Standard equipment \*\* (Tabl. 1)


Pos.	Identification	Name	Q-ty	Mass pc.,kg	Note
1	Vodaland	Oil and water Separator Vodaland OilBase100 -1 (15), disch. 1l/s or 15 gpm, (0 gpm -ByPass) fiberglass, D= 800 (2'-8,5"), Ht=1450 mm (4'-9.0")	1	70	compl.
2		Inspection manhole $\phi 620$ (2'-0.5")	1		compl.
3.1,3.2	D1-Inlet / D2-Outlet	Rubber seal for connection $\phi 110$ (4.0")	2		compl.
4		Coalescent block	1		compl.
5		Automatic locking device D110 (4.25")	1		compl.
		Volume of light liquids	12.5		gal
		Volume of sludge trap	25		gal

\*\*The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Information


### Oil and water Separator

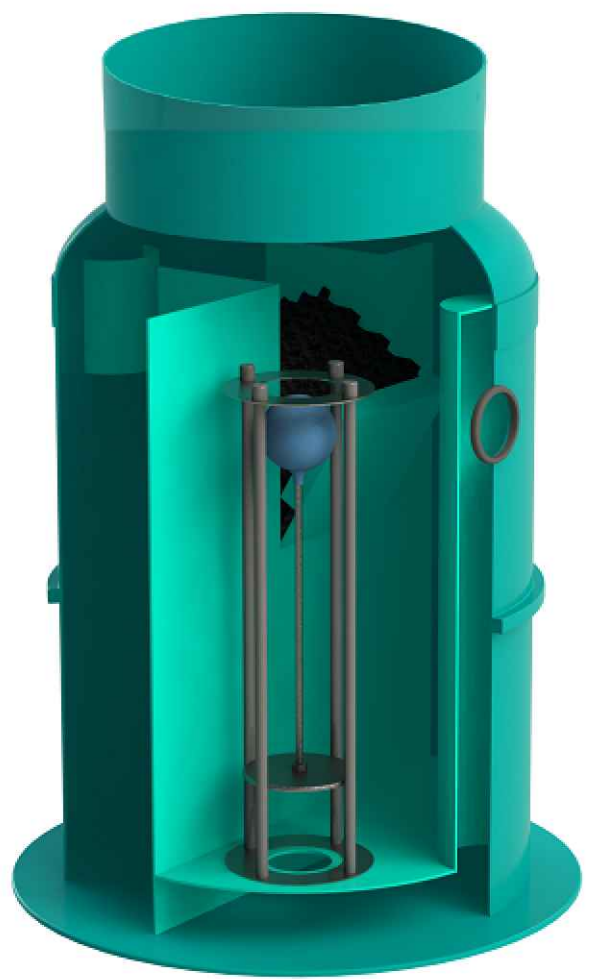

### Standard equipment

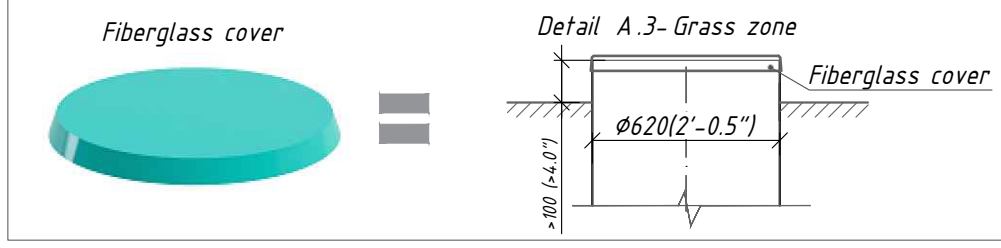

### Additional equipment

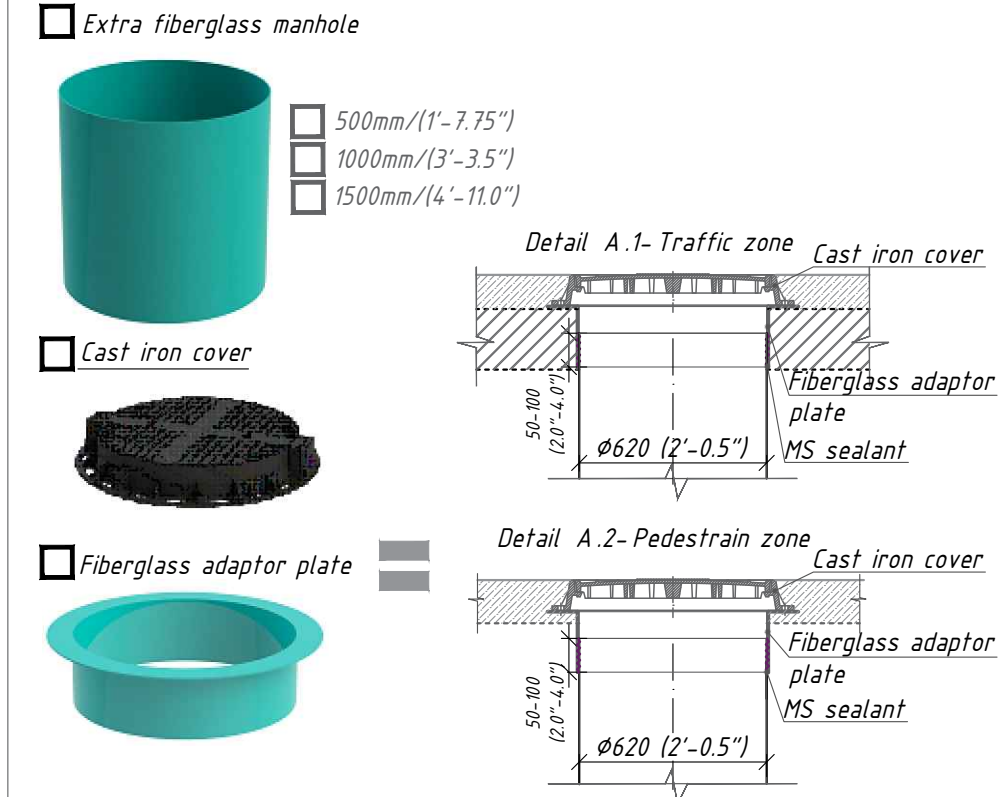

**Note:**  
 \*H-depth of the inlet connection (in standard equipment H up to 1000 mm (3'-3.5")). H take a multiple of 50mm(2.0").  
 \*\*The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Information. The complete set of the product is agreed with the manager.  
 \*\*\*The manufacturer reserves the right to make design and schematic changes that do not impair the characteristics of the product as a whole. Permissible deviation during production of products is 1-3%.

Additional Information:

Oil and water Separator  
 OilBase100 -1 (15)  
 Factory ID: OB1-1

Vodaland Canada Inc. 5900 Ambler Drive, Unit 1 & 2, Mississauga, ON L4W 2N3 +1 (905) 238 1771

manufactured by **FIBERICA** Ukraine, Cherkasy city, 18028  
 distributed by **VODALAND**