


Oil and water Separator OilBase100 -3 (50) (S 1:16)

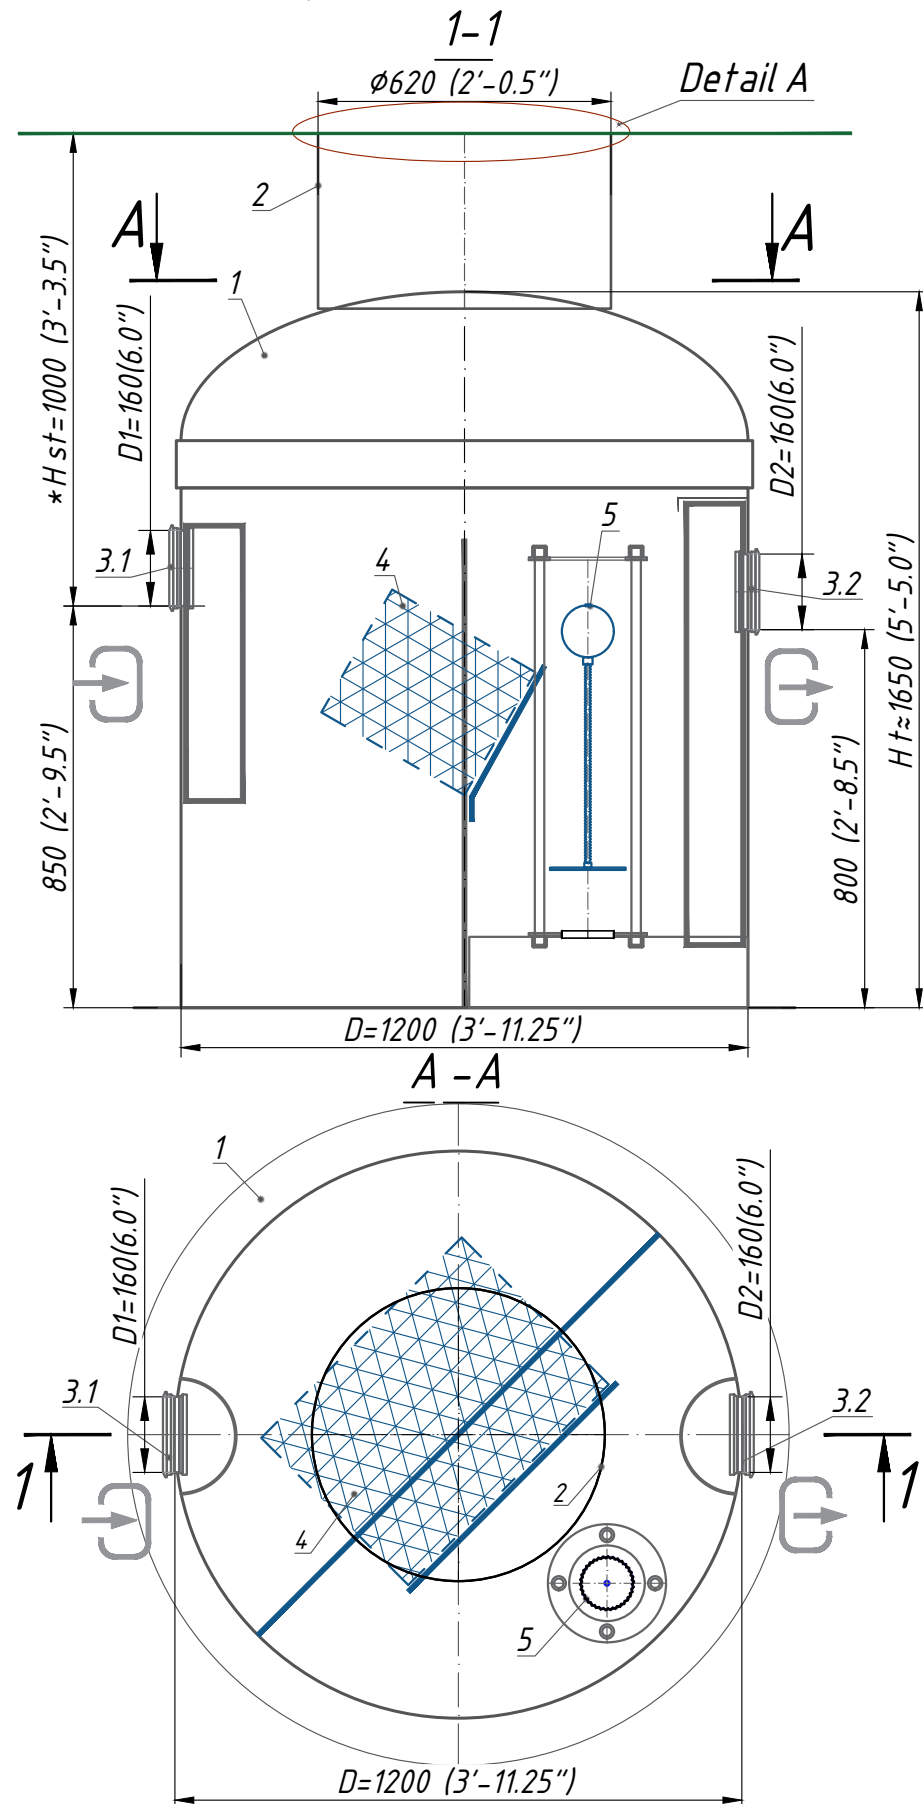

Specification of materials and equipment. Standard equipment ** (Tabl. 1)


Pos.	Identification	Name	Q-ty	Mass pc.,kg	Note
1	Vodaland	Oil and water Separator Vodaland OilBase100 -3(50), disch. 3 l/s or 50 gpm, (0 -ByPass) fiberglass, D= 1200 (3'-11.25"), Ht≈1650 mm (5'-5.0")	1	124	compl.
2		Inspection manhole Ø620 (2'-0.5")	1		compl.
3.1,3.2	D1-Inlet / D2-Outlet	Rubber seal for connection Ø 160 (6.0")	2		compl.
4		Coalescent block	1		compl.
5		Automatic locking device 110 (4.25")	1		compl.
		Volume of light liquids	40		gal
		Volume of sludge trap	80		gal

**The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Information


Oil and water Separator



Standard equipment

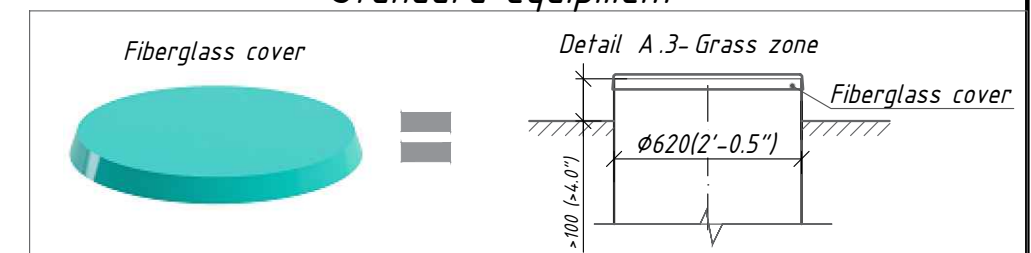

Additional equipment

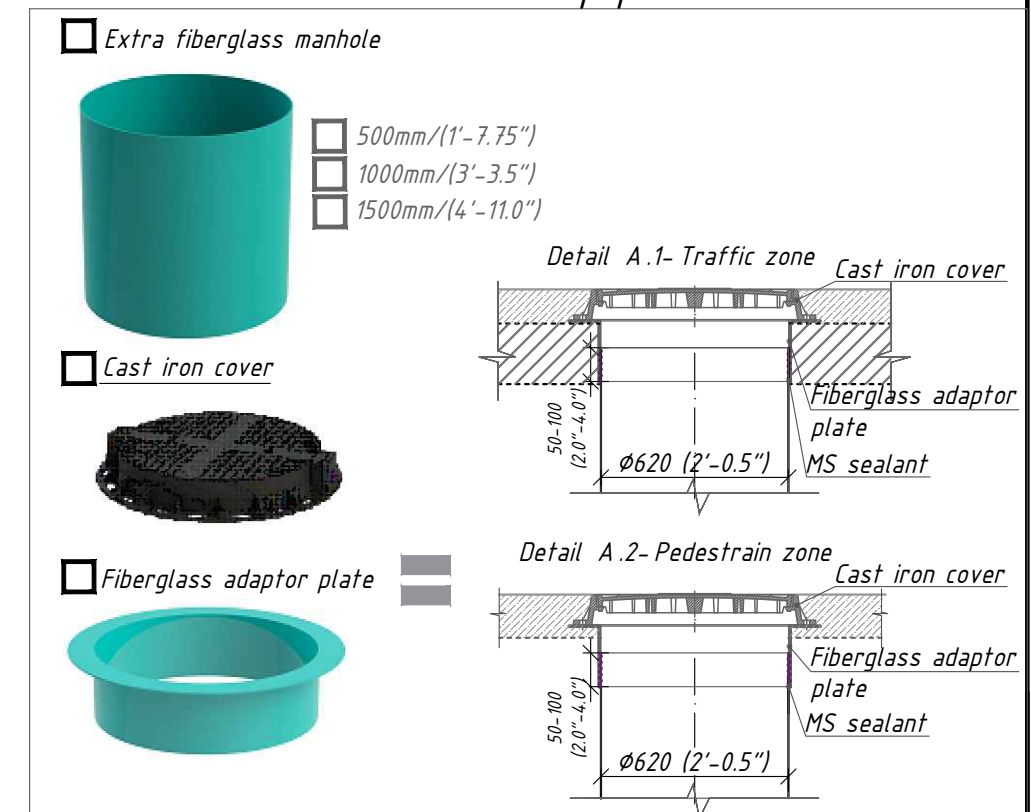

Note:
 *H-depth of the inlet connection (in standard equipment H up to 1000 mm (3'-3.5")). H take a multiple of 50mm(2.0").
 **The product is shipped according to Standard Equipment (Tabl. 1), unless otherwise specified in the Additional Information. The complete set of the product is agreed with the manager.
 ***The manufacturer reserves the right to make design and schematic changes that do not impair the characteristics of the product as a whole. Permissible deviation during production of products is 1-3%.

Additional Information:

Oil and water Separator OilBase100 -3(50)		Vodaland Canada Inc. 5900 Ambler Drive, Unit 1 & 2, Mississauga, ON L4W 2N3 +1 (905) 238 1771
Factory ID:	OB1-3	
manufactured by FIBERICA Ukraine, Cherkasy city, 18028	distributed by VODALAND	