EasyPave Grass fill
Heavy Loads (over 5,000Lbs)



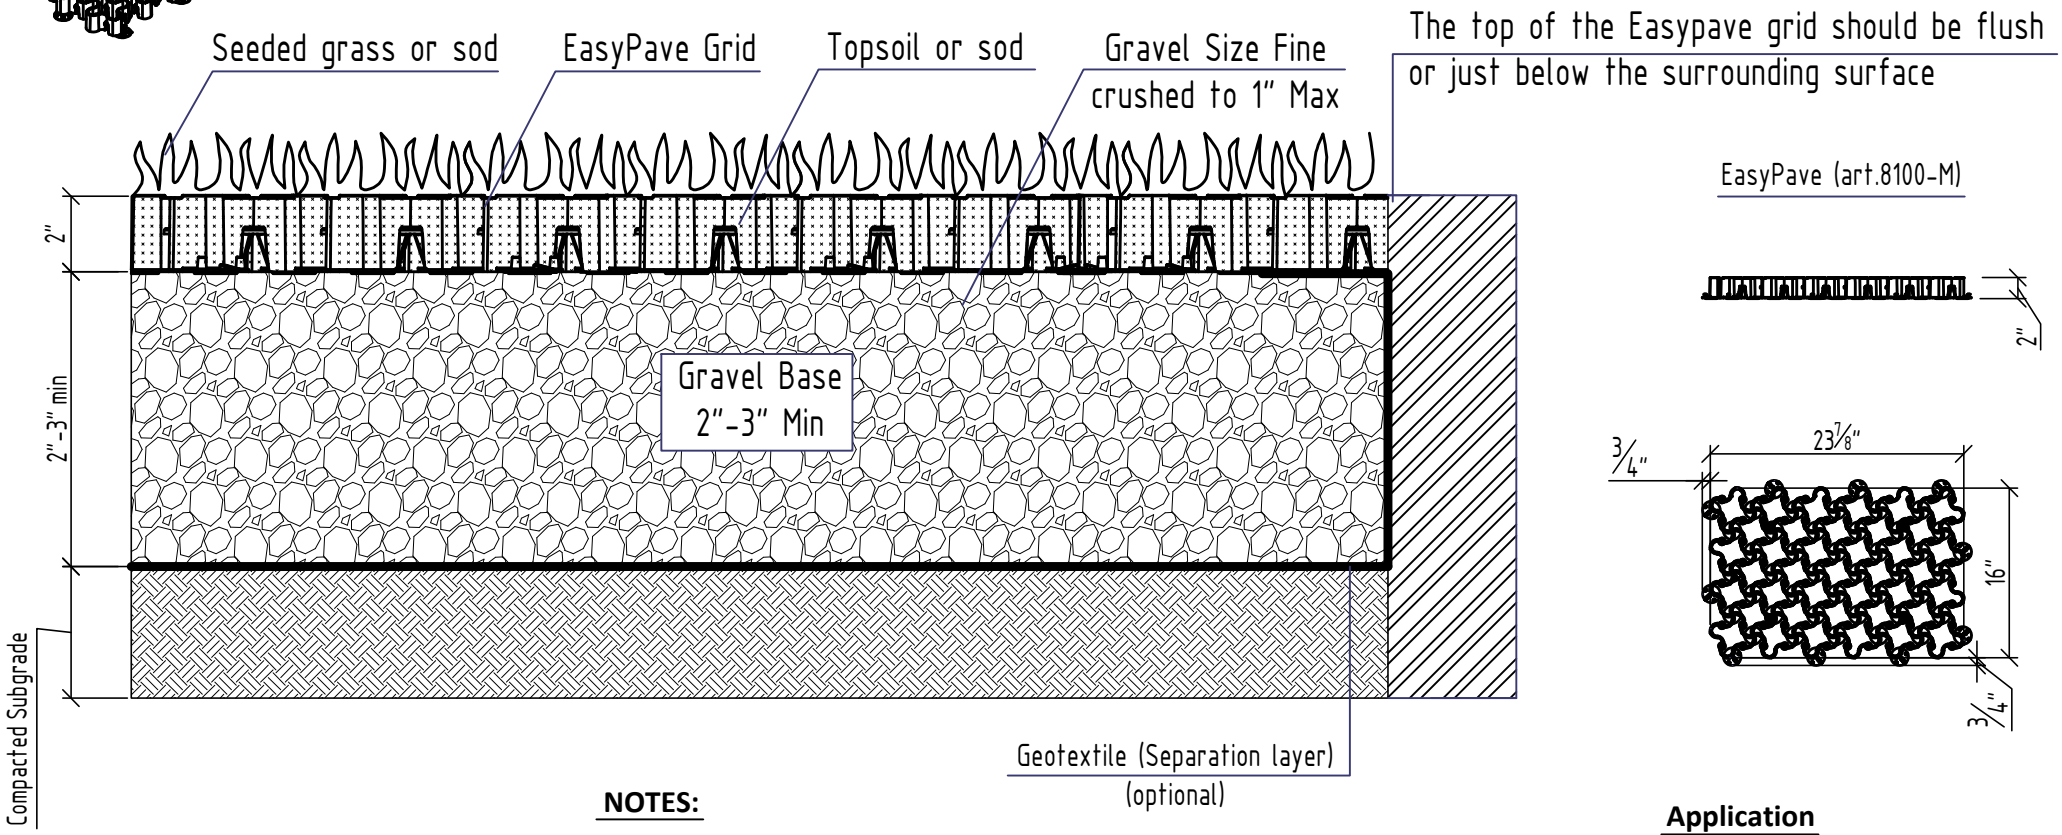

NOTES:

1. **The base height shown in the cross-section depends on specific site and loading conditions.**
2. **Layers shown in cross-section need to be compacted.**
3. **Seeding: Fill the soil or growing area to the top of the grid.**
   Apply seeding based on the instructions of the supplier.
4. **Sodding: Fill Topsoil to half the height of the grid.**
   Press sod within the grid so that the grid's top is leveled with the soil and roots.
   Only the grass's leaves should be extending above the grid.
5. **Geo-textile is to be used for stability and to prevent mixing between layers.**
6. **Anchors are recommended for slope installations of more than 10%.**
7. **This drawing is for conceptual design and information use only.**

Application

Commercial Parking Lots, Emergency & Fire Lanes, Service Roads

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH TOLERANCES: LINEAR: ANGULAR:	FINISH			DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING / REVISION
	NAME	SIGNATURE	DATE		VODALAND
DRAWN					TITLE: EasyPave Grass fill (Heavy Loads)
CHK'D					
APPV'D					
APPV'D				MATERIAL: Plastic	ARTICLE: 8100-M