

EL40

ELECTRIC FIREPLACE



EL40




Application	Indoor	
Materials	Mild Steel with Polymer Satin Power-Coat, Tempered Glass	
Weight	44kg [97lbs] (fire unit only)	
Colour & SKU	Black	ESF.1.EL.40

TECHNICAL SPECIFICATION

Type	Electric
Volts	AC 120V/60Hz
Amps	13.4 Amps
Watts	1530W
Low Heat	750W
High Heat	1500W
No Heater	100W
Lamps	LED
Rotor Motor	AC 120V/60Hz 4W

Read the manual carefully before operating. Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

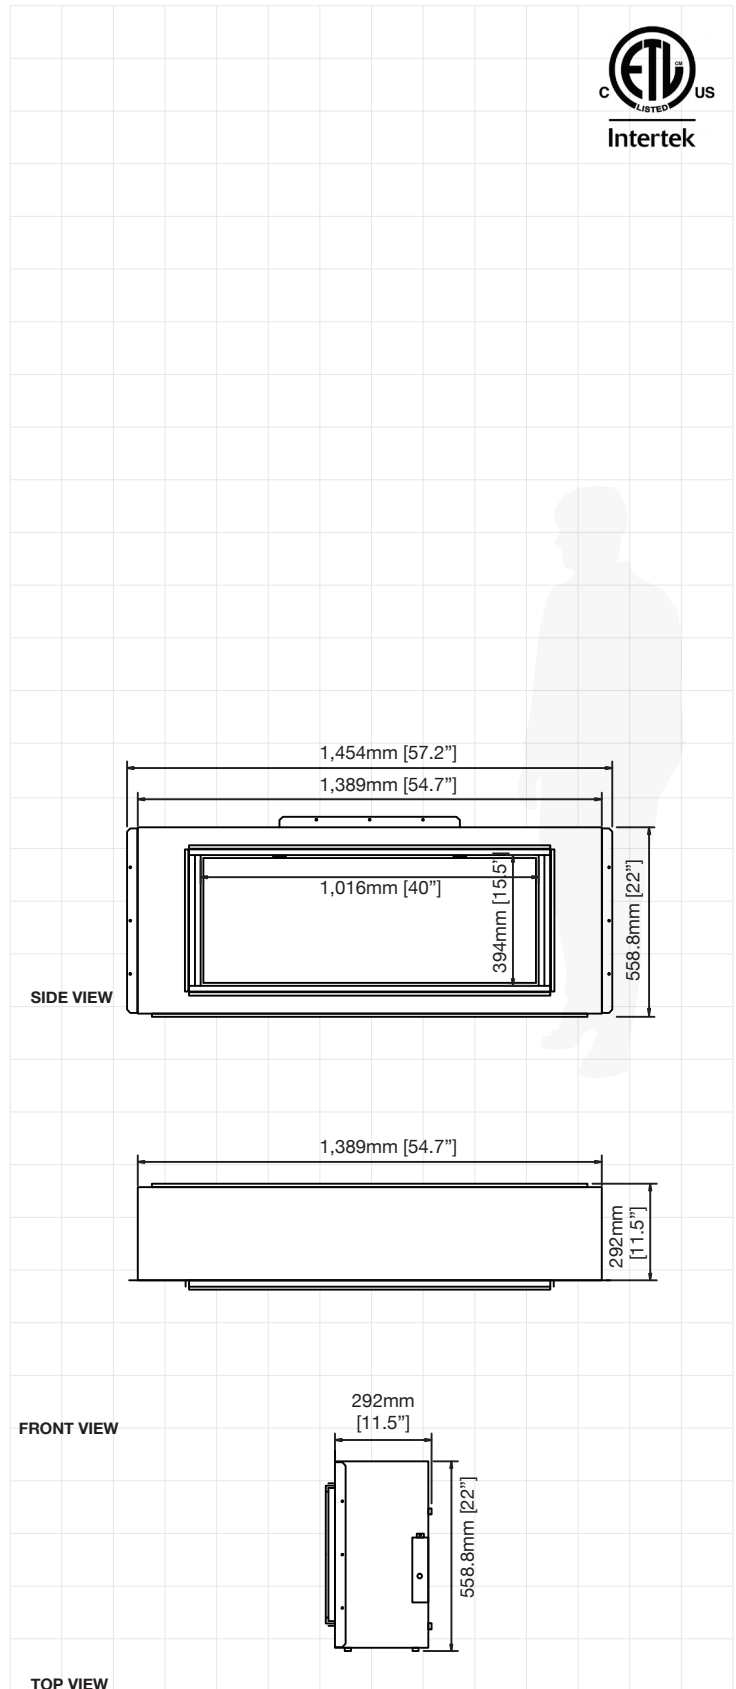

ELECTRIC FIREPLACES

FRAMING SPECIFICATIONS

Table A: FRAMING DIMENSIONS

Prepare the framed opening using wood or metal studs according to the table below.

MODEL	W	H	D
EL40	55 3/4" 1416mm	23" 584mm	12" 304.8mm
EL60	75 3/4" 1924mm	23" 584mm	12" 304.8mm
EL80	95 3/4" 2432mm	23" 584mm	12" 304.8mm
EL100	115 3/4" 2940mm	23" 584mm	12" 304.8mm
EL120	135 3/4" 3448mm	23" 584mm	12" 304.8mm


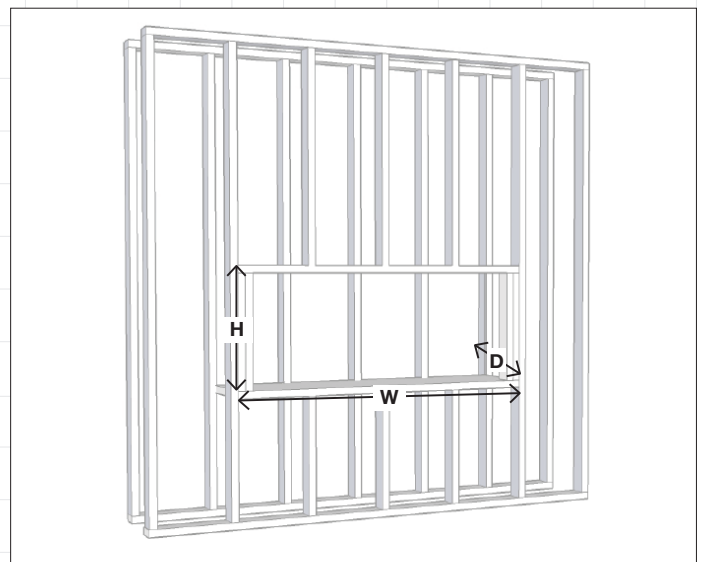


Table B: SURROUND / FINISHING DIMENSIONS

Prepare the finishing material around the viewing area according to the table below.

MODEL	W	H	D
EL40	42 5/8" 1,082.7mm	16 5/8" 422.3mm	N/A
EL60	62 5/8" 1,590.7mm	16 5/8" 422.3mm	N/A
EL80	82 5/8" 2,098.7mm	16 5/8" 422.3mm	N/A
EL100	102 5/8" 2,606.7mm	16 5/8" 422.3mm	N/A
EL120	122 5/8" 3,114.7mm	16 5/8" 422.3mm	N/A

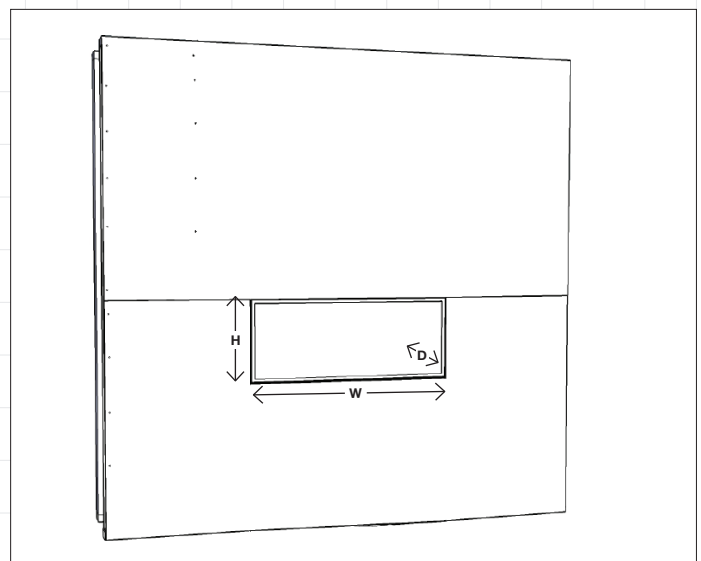


Physical model dimensions should be verified against cut out dimensions BEFORE cutting surround materials.

EL60

ELECTRIC FIREPLACE



EL60

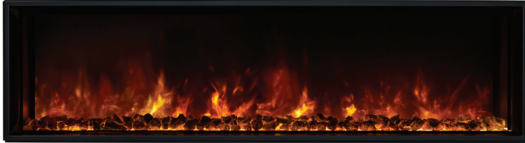


Application	Indoor	
Materials	Mild Steel with Polymer Satin Power-Coat, Tempered Glass	
Weight	55.6kg [122.5lbs] (fire unit only)	
Colour & SKU	Black	ESF.1.EL.60

TECHNICAL SPECIFICATION

Type	Electric
Volts	AC 120V/60Hz
Amps	13.4 Amps
Watts	1530W
Low Heat	750W
High Heat	1500W
No Heater	100W
Lamps	LED
Rotor Motor	AC 120V/60Hz 4W

Read the manual carefully before operating. Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

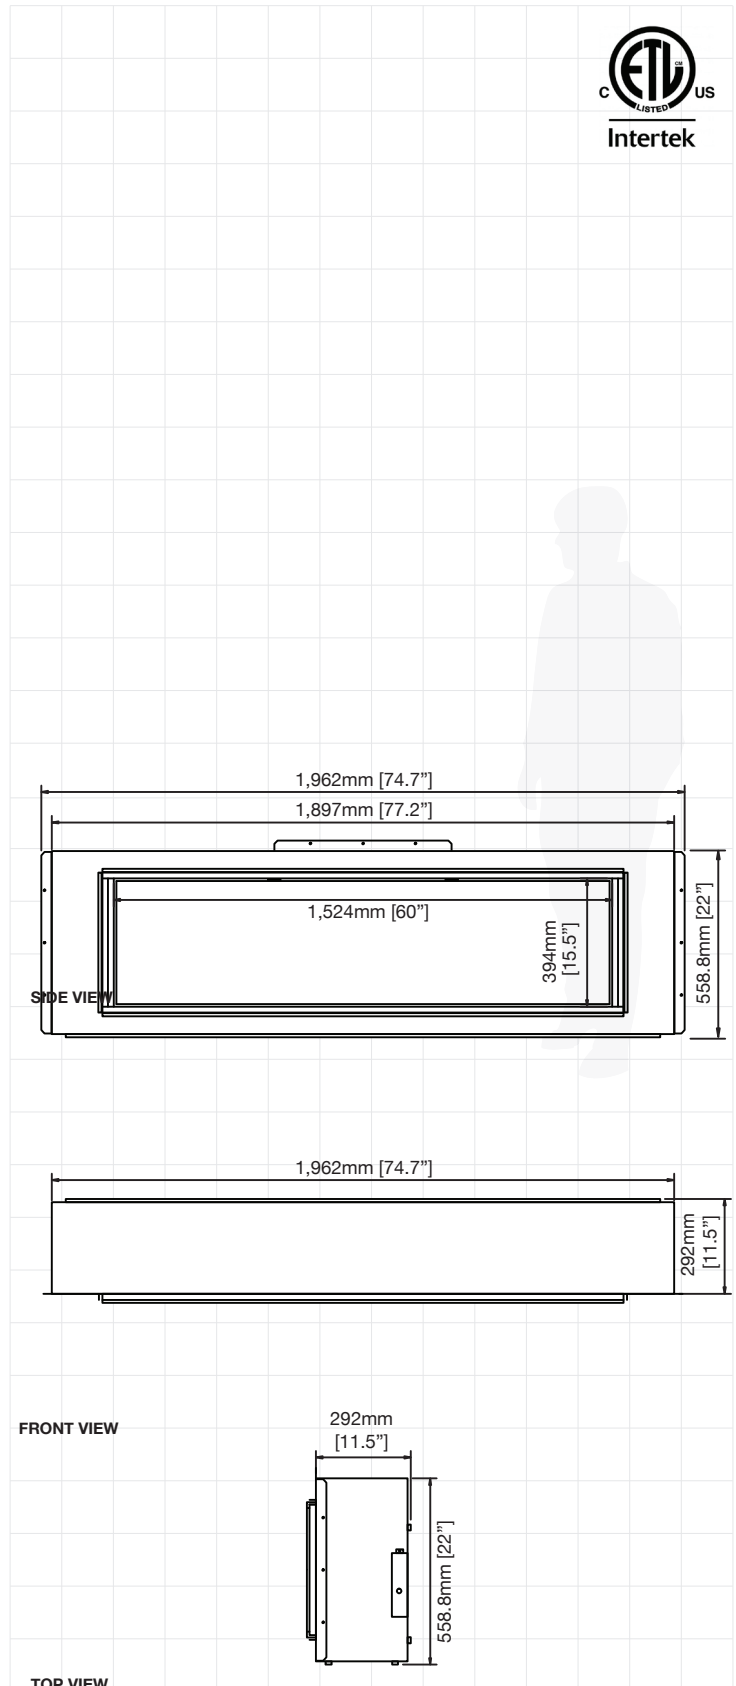

ELECTRIC FIREPLACES

FRAMING SPECIFICATIONS

Table A: FRAMING DIMENSIONS

Prepare the framed opening using wood or metal studs according to the table below.

MODEL	W	H	D
EL40	55 3/4" 1416mm	23" 584mm	12" 304.8mm
EL60	75 3/4" 1924mm	23" 584mm	12" 304.8mm
EL80	95 3/4" 2432mm	23" 584mm	12" 304.8mm
EL100	115 3/4" 2940mm	23" 584mm	12" 304.8mm
EL120	135 3/4" 3448mm	23" 584mm	12" 304.8mm


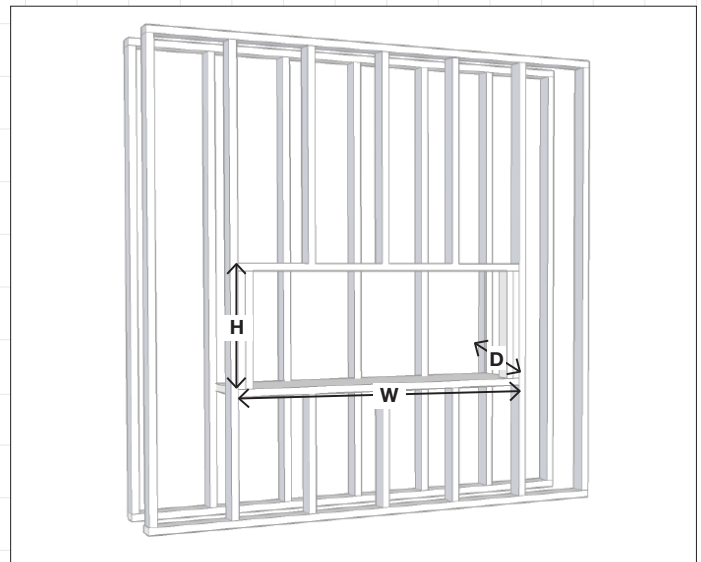


Table B: SURROUND / FINISHING DIMENSIONS

Prepare the finishing material around the viewing area according to the table below.

MODEL	W	H	D
EL40	42 5/8" 1,082.7mm	16 5/8" 422.3mm	N/A
EL60	62 5/8" 1,590.7mm	16 5/8" 422.3mm	N/A
EL80	82 5/8" 2,098.7mm	16 5/8" 422.3mm	N/A
EL100	102 5/8" 2,606.7mm	16 5/8" 422.3mm	N/A
EL120	122 5/8" 3,114.7mm	16 5/8" 422.3mm	N/A

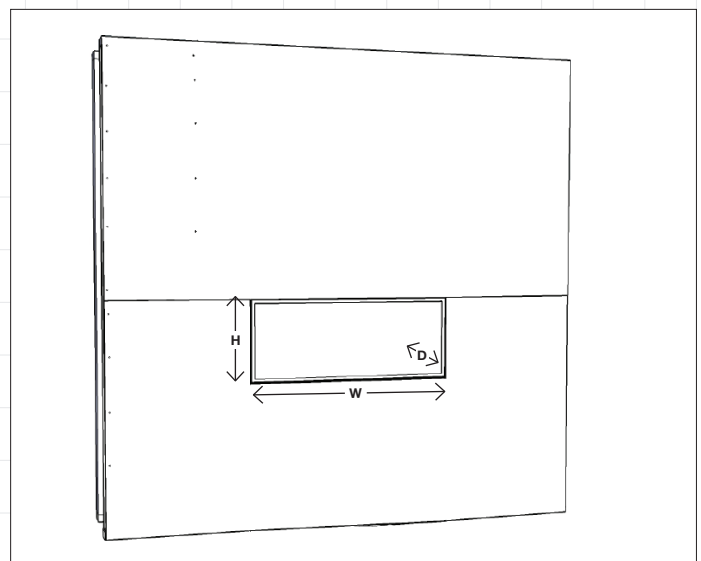


Physical model dimensions should be verified against cut out dimensions BEFORE cutting surround materials.

EL80

ELECTRIC FIREPLACE



EL80

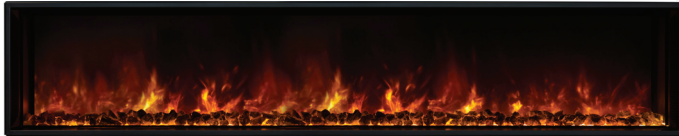


Application	Indoor	
Materials	Mild Steel with Polymer Satin Power-Coat, Tempered Glass	
Weight	69.1kg [152.3lbs] (fire unit only)	
Colour & SKU	 Black	ESF.1.EL.80

TECHNICAL SPECIFICATION

Type	Electric
Volts	AC 120V/60Hz
Amps	13.4 Amps
Watts	1530W
Low Heat	750W
High Heat	1500W
No Heater	100W
Lamps	LED
Rotor Motor	AC 120V/60Hz 4W

Read the manual carefully before operating. Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

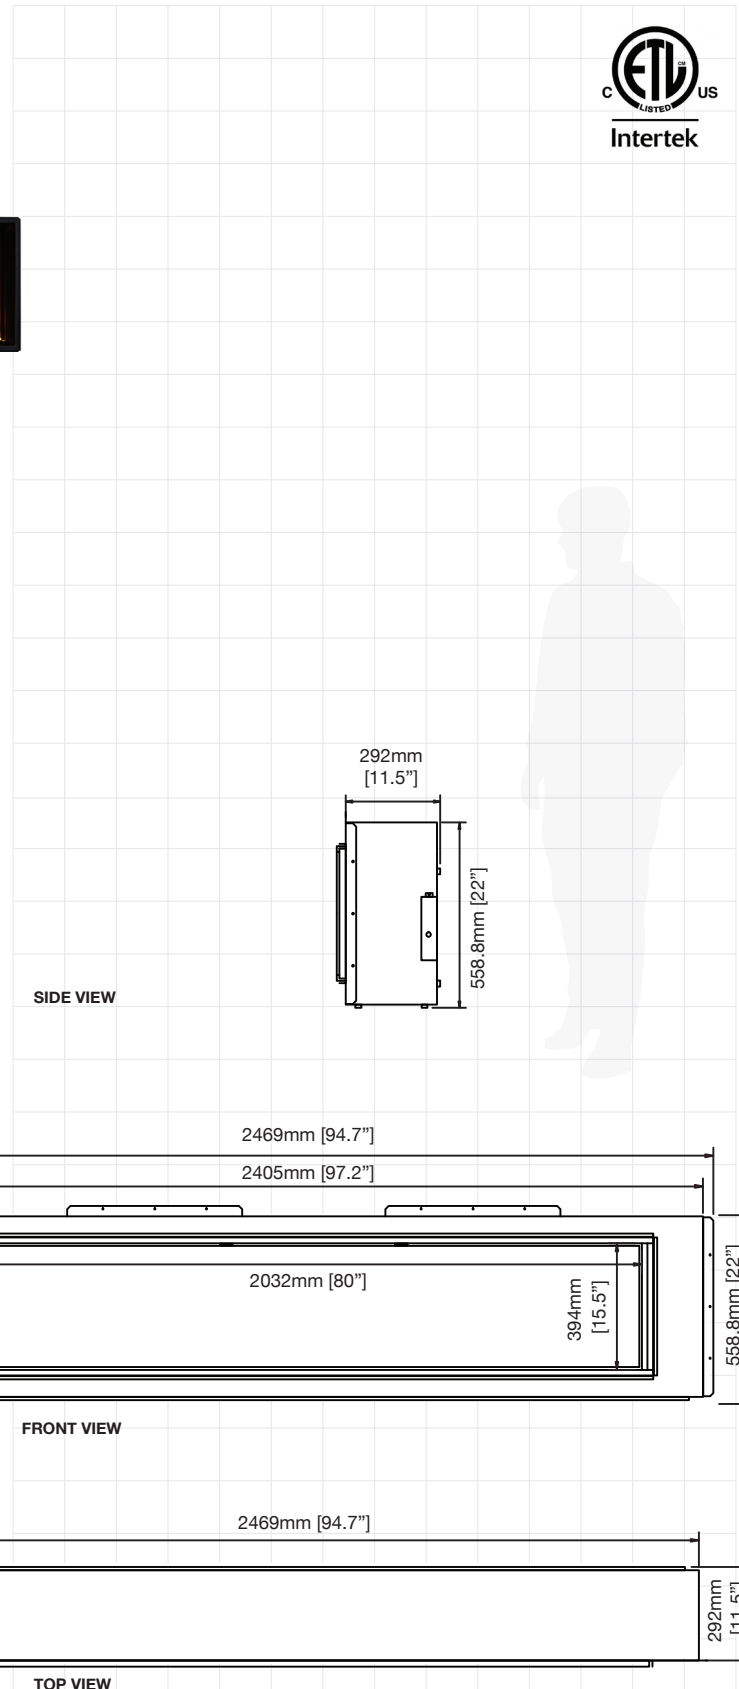

ELECTRIC FIREPLACES

FRAMING SPECIFICATIONS

Table A: FRAMING DIMENSIONS

Prepare the framed opening using wood or metal studs according to the table below.

MODEL	W	H	D
EL40	55 3/4" 1416mm	23" 584mm	12" 304.8mm
EL60	75 3/4" 1924mm	23" 584mm	12" 304.8mm
EL80	95 3/4" 2432mm	23" 584mm	12" 304.8mm
EL100	115 3/4" 2940mm	23" 584mm	12" 304.8mm
EL120	135 3/4" 3448mm	23" 584mm	12" 304.8mm


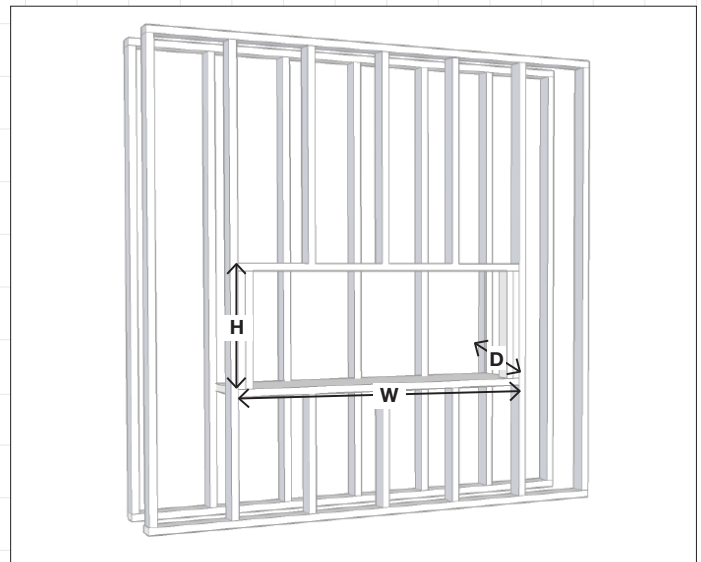


Table B: SURROUND / FINISHING DIMENSIONS

Prepare the finishing material around the viewing area according to the table below.

MODEL	W	H	D
EL40	42 5/8" 1,082.7mm	16 5/8" 422.3mm	N/A
EL60	62 5/8" 1,590.7mm	16 5/8" 422.3mm	N/A
EL80	82 5/8" 2,098.7mm	16 5/8" 422.3mm	N/A
EL100	102 5/8" 2,606.7mm	16 5/8" 422.3mm	N/A
EL120	122 5/8" 3,114.7mm	16 5/8" 422.3mm	N/A

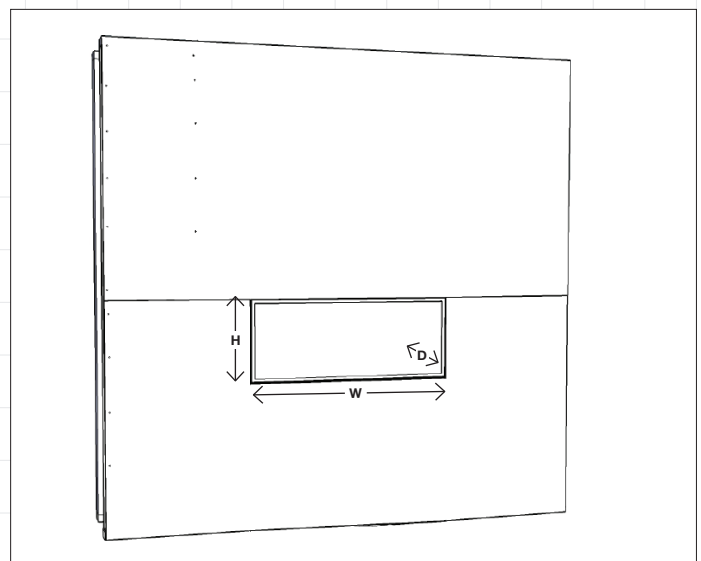

Physical model dimensions should be verified against cut out dimensions BEFORE cutting surround materials.


EL100

ELECTRIC FIREPLACE



EL100



Application	Indoor	
Materials	Mild Steel with Polymer Satin Power-Coat, Tempered Glass	
Weight	88.7kg [195.5lbs] (fire unit only)	
Colour & SKU	 Black	ESF.1.EL.100

TECHNICAL SPECIFICATION


Type	Electric
Volts	AC 120V/60Hz
Amps	13.4 Amps
Watts	1530W
Low Heat	750W
High Heat	1500W
No Heater	100W
Lamps	LED
Rotor Motor	AC 120V/60Hz 4W

Read the manual carefully before operating. Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.


SIDE VIEW



FRONT VIEW

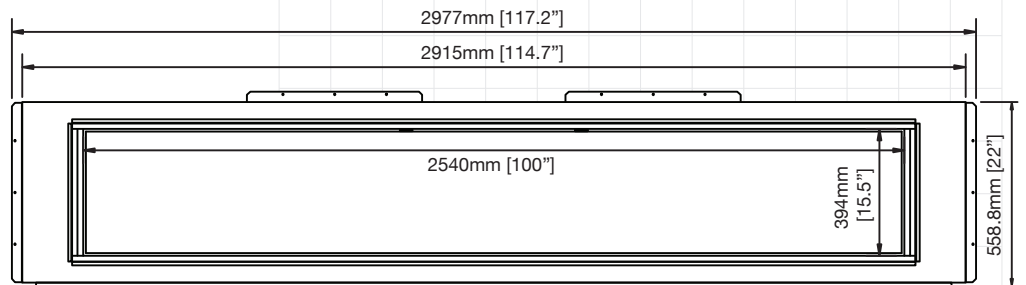

TOP VIEW

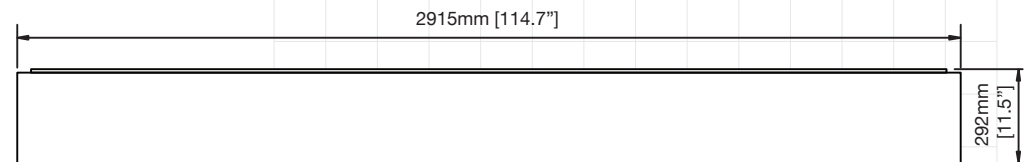

ELECTRIC FIREPLACES

FRAMING SPECIFICATIONS

Table A: FRAMING DIMENSIONS

Prepare the framed opening using wood or metal studs according to the table below.

MODEL	W	H	D
EL40	55 3/4" 1416mm	23" 584mm	12" 304.8mm
EL60	75 3/4" 1924mm	23" 584mm	12" 304.8mm
EL80	95 3/4" 2432mm	23" 584mm	12" 304.8mm
EL100	115 3/4" 2940mm	23" 584mm	12" 304.8mm
EL120	135 3/4" 3448mm	23" 584mm	12" 304.8mm


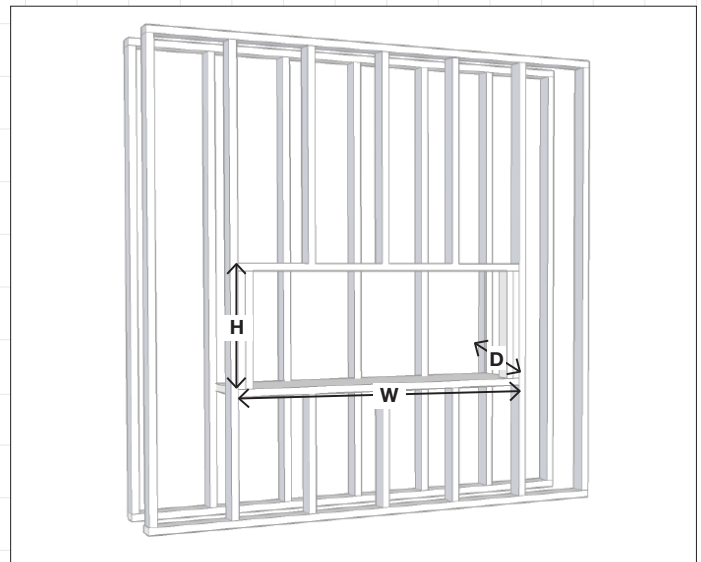


Table B: SURROUND / FINISHING DIMENSIONS

Prepare the finishing material around the viewing area according to the table below.

MODEL	W	H	D
EL40	42 5/8" 1,082.7mm	16 5/8" 422.3mm	N/A
EL60	62 5/8" 1,590.7mm	16 5/8" 422.3mm	N/A
EL80	82 5/8" 2,098.7mm	16 5/8" 422.3mm	N/A
EL100	102 5/8" 2,606.7mm	16 5/8" 422.3mm	N/A
EL120	122 5/8" 3,114.7mm	16 5/8" 422.3mm	N/A

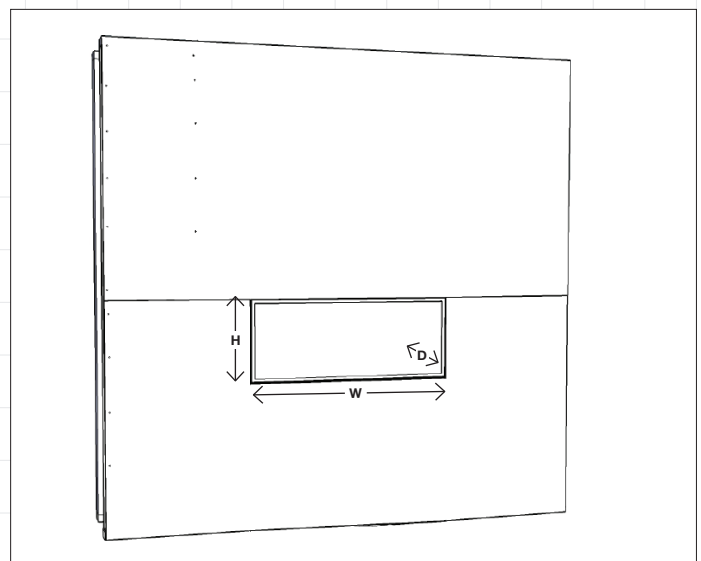

Physical model dimensions should be verified against cut out dimensions BEFORE cutting surround materials.

EL120

ELECTRIC FIREPLACE



EL120





Application	Indoor	
Materials	Mild Steel with Polymer Satin Power-Coat, Tempered Glass	
Weight	98.9kg [218lbs] (fire unit only)	
Colour & SKU	Black	ESF.1.EL.120

TECHNICAL SPECIFICATION


Type	Electric
Volts	AC 120V/60Hz
Amps	13.4 Amps
Watts	1530W
Low Heat	750W
High Heat	1500W
No Heater	100W
Lamps	LED
Rotor Motor	AC 120V/60Hz 4W

Read the manual carefully before operating. Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.


SIDE VIEW

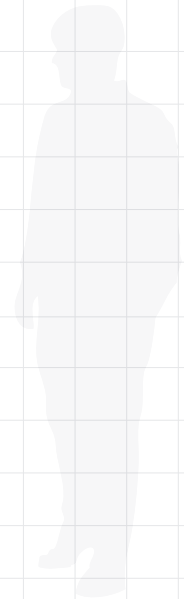

FRONT VIEW

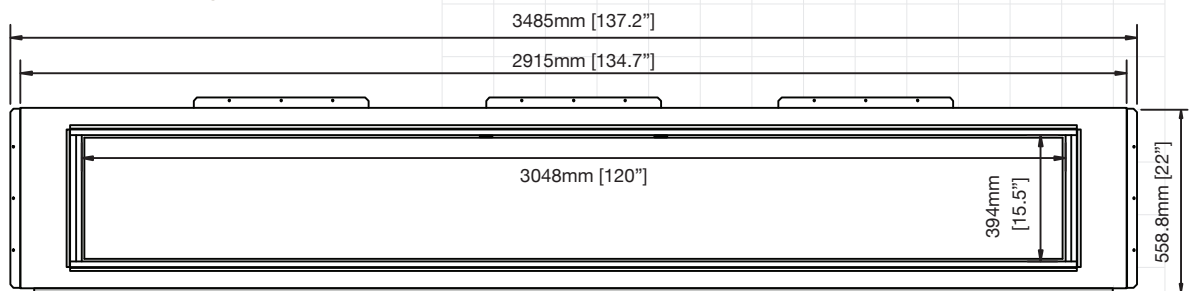

TOP VIEW

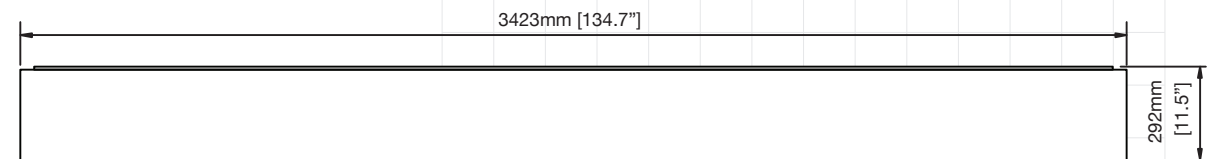

ELECTRIC FIREPLACES

FRAMING SPECIFICATIONS

Table A: FRAMING DIMENSIONS

Prepare the framed opening using wood or metal studs according to the table below.

MODEL	W	H	D
EL40	55 3/4" 1416mm	23" 584mm	12" 304.8mm
EL60	75 3/4" 1924mm	23" 584mm	12" 304.8mm
EL80	95 3/4" 2432mm	23" 584mm	12" 304.8mm
EL100	115 3/4" 2940mm	23" 584mm	12" 304.8mm
EL120	135 3/4" 3448mm	23" 584mm	12" 304.8mm


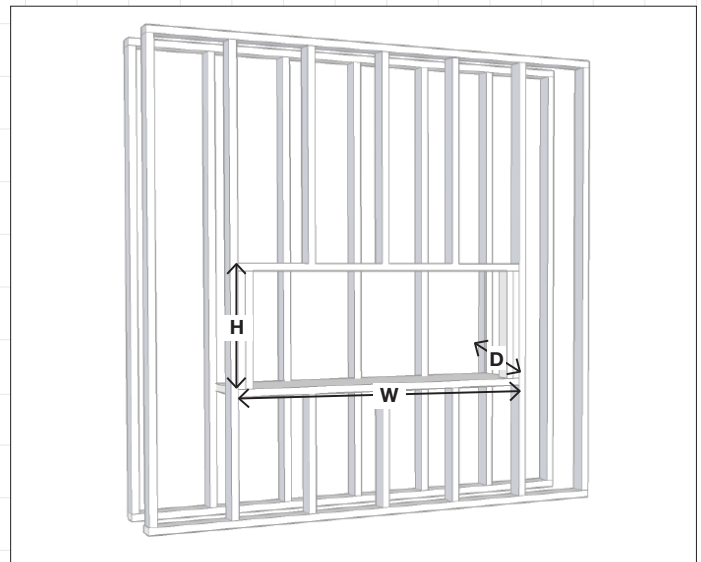


Table B: SURROUND / FINISHING DIMENSIONS

Prepare the finishing material around the viewing area according to the table below.

MODEL	W	H	D
EL40	42 5/8" 1,082.7mm	16 5/8" 422.3mm	N/A
EL60	62 5/8" 1,590.7mm	16 5/8" 422.3mm	N/A
EL80	82 5/8" 2,098.7mm	16 5/8" 422.3mm	N/A
EL100	102 5/8" 2,606.7mm	16 5/8" 422.3mm	N/A
EL120	122 5/8" 3,114.7mm	16 5/8" 422.3mm	N/A

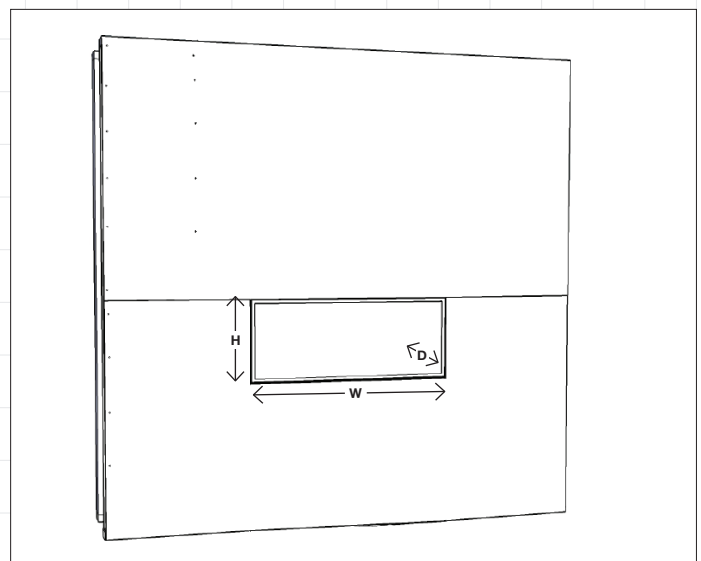

Physical model dimensions should be verified against cut out dimensions BEFORE cutting surround materials.