



Casual Fireside TM

Glass Guard Assembly and Care Instructions.

Tools Needed


- * Standard Flat Head Screwdriver
- * Cotton gloves for handling glass panels (Optional)

Included in this Kit


- * 4 Glass panels
- * 8 brackets; 4 top, 4 bottom

- * 51-34G Rectangle Glass Guard - for 10"x30" Rectangle Burners
- * 51-141G Square Glass Guard - for 20" Square Burners
- * 51-142G Small Round Glass Guard - for 20" Round Burners
- * 51-143G Large Round Glass Guard - for 24" Round Burners
- * 51-144G X-Small Round Glass Guard - for 16" Round Burners

Installation Instructions

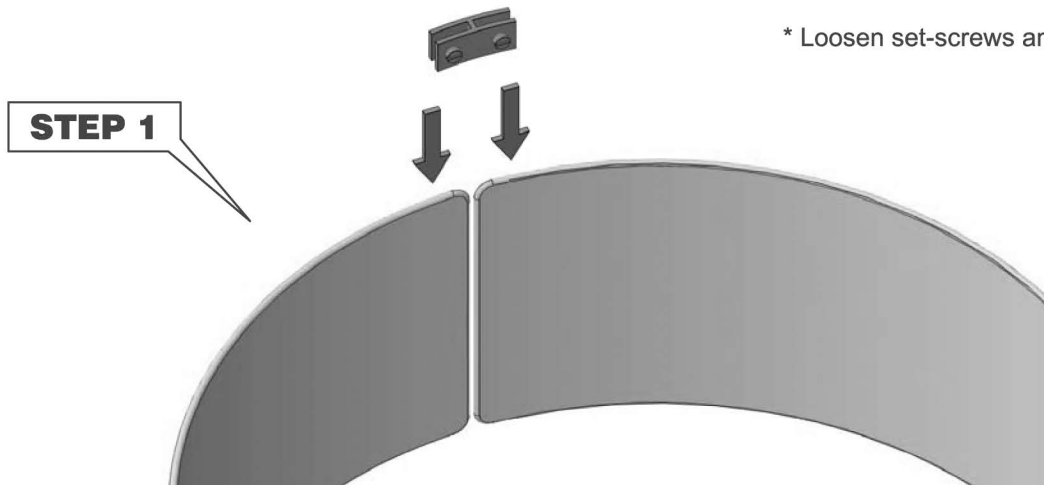


* Loosen set-screws and lower bracket onto glass.

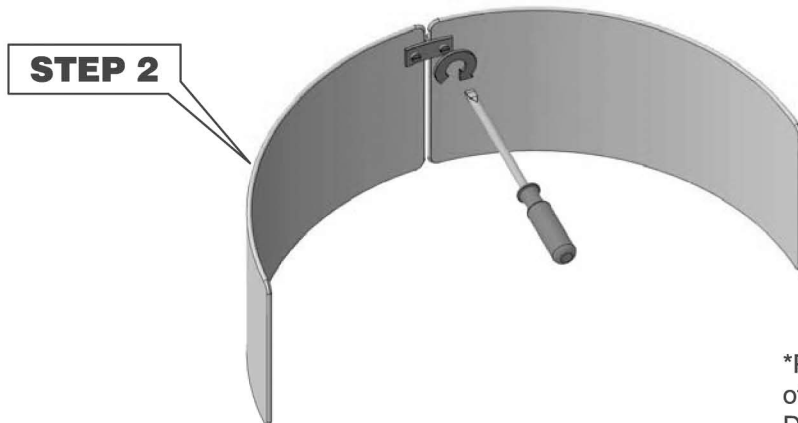

*Place bracket 1" below the top edge of the glass. Tighten set-screws until snug. DO NOT over tighten as glass may break.


*Repeat steps 1 & 2 for remaining 3 brackets

STEP 3

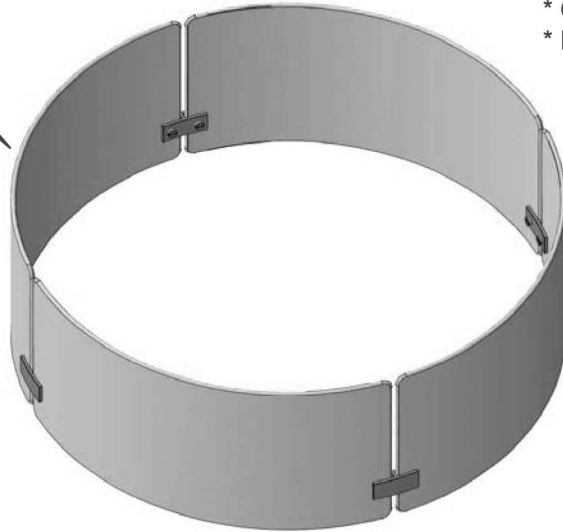

- * CAREFULLY flip assembled glass over.
- * Repeat steps 1 and 2 for remaining brackets.

STEP 4

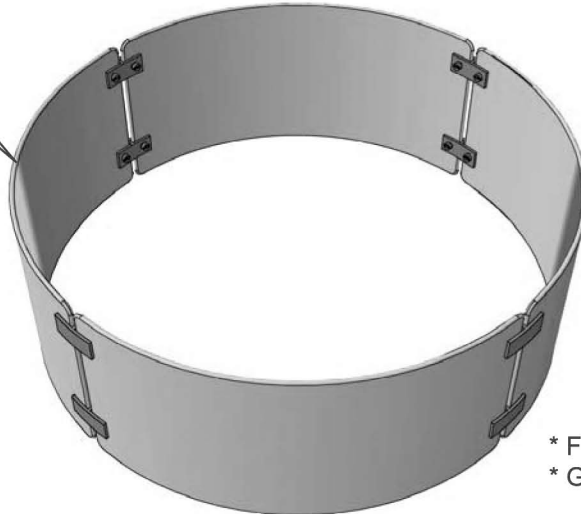

- * Finish assembled glass should look like this.
- * Gently set the glass guard onto firepit.

HOW TO CLEAN

- * Soot can build up on the glass guard & should be cleaned off regularly.
- * Clean Glass with a water & white vinegar solution or commercially available streak free glass cleaner.

CAUTION

- * DO NOT touch glass while fire pit is lit or right after use because glass will be HOT and could cause burns.
- * If glass needs to be handled while the fire pit is lit or before cool to the touch use high temperature gloves with a non-slip grip.
- * DO NOT attempt to clean glass while firepit is lit or for at least 30 minutes following use because glass will be hot and may break from sudden cooling.