

Digital Chip embedded with Certificate for serial Traceability


- YOKE Light Snatch Blocks are manufactured of the highest quality tensile steel.
- Available from 2 tonnes to 8 tonnes, for wire rope sizes 8mm to 19mm.
- Certified by ABS Type Approval.
- Part number, wire rope size and working load limit are marked on each block.
- Permanent batch codes link to test certificates for easy traceability.
- Supplied with bronze bushings and 3.0"-14" with pressure lube fittings.
- Meets or exceeds all requirements of ASME B30.26.
- Safety factor 4:1
- Fatigue rated

## Light Snatch Block with Hook

Item No.	Sheave Dia.	Bearing Type	Wire Rope Size	Working Load Limit	Dimensions							N.W.	
					B	E	F	G	L	R	T	lbs	kg
	inch		mm	tonnes				mm					
8-502-02	3.0	**BB	8-10	2	27	64	26	75	250	224	20	7	3
8-502-04	4.5	BB	10-13	4	34	82	35	107	355	320	31	13	6
8-502-08	6.0	BB	16-19	8	48	112	61	152	488	427	40	29	13
8-502-0808	8.0	BB	16-19	8	48	112	61	220	563	502	40	42	19
8-502-0810	10.0	BB	16-19	8	48	112	61	264	603	542	40	45	21
8-502-0812-16	12.0	BB	16	8	48	112	61	310	666	605	40	48	22
8-502-0812-19	12.0	BB	19	8	48	112	61	310	666	605	40	48	22
8-502-0814-16	14.0	BB	16	8	48	112	61	356	701	640	40	55	25
8-502-0814-19	14.0	BB	19	8	48	112	61	356	701	640	40	55	25

\*Minimum Ultimate Load is 4 times the Working Load Limit.

\*\*BB: Bronze Bushing

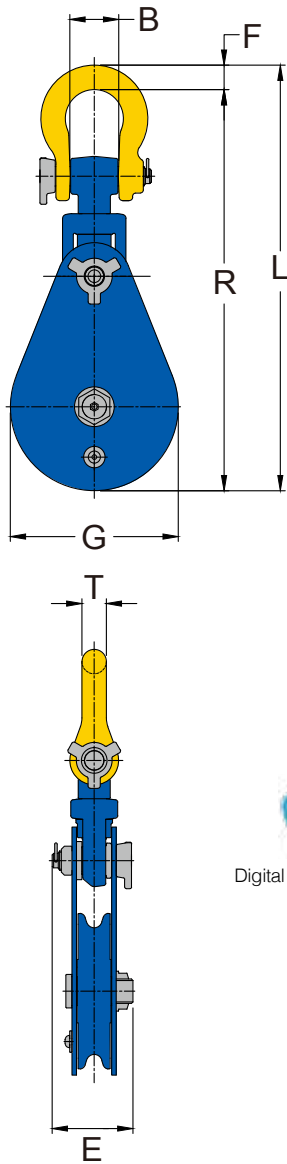

8-501-08 and up  
 Digital Chip embedded  
**Digital Chip embedded with Certificate for serial Traceability**



8-501-02  
 8-501-04  
 Digital Chip embedded

- YOKE Light Snatch Blocks are manufactured of the highest quality tensile steel.
- Available from 2 tonnes to 8 tonnes, for wire rope sizes 8mm to 19mm.
- Certified by CCS, UKCA Type Approval.
- Part number, wire rope size and working load limit are marked on each block.
- Permanent batch codes link to test certificates for easy traceability.
- Supplied with bronze bushings and 3.0"-14" with pressure lube fittings.
- Meets or exceeds all requirements of ASME B30.26.
- Safety factor 4:1
- Fatigue rated

## Light Snatch Block with Shackle

Item No.	Sheave Dia. inch	Bearing Type	Wire Rope Size mm	Working Load Limit tonnes	Dimensions							N.W.	
					B	E	F	G	L	R	T	lbs	kg
8-501-02	3.0	**BB	8-10	2	19	64	11	75	228	217	11	4	2
8-501-04	4.5	BB	10-13	4	34	82	19	108	355	336	19	13	6
8-501-08	6.0	BB	16-19	8	64	112	32	152	483	451	32	29	13
8-501-0808	8.0	BB	16-19	8	64	112	32	220	557	525	32	44	20
8-501-0810	10.0	BB	16-19	8	64	112	32	264	598	566	32	46	21
8-501-0812-16	12.0	BB	16	8	64	112	32	310	658	626	32	49	22
8-501-0812-19	12.0	BB	19	8	64	112	32	310	658	626	32	49	22
8-501-0814-16	14.0	BB	16	8	64	112	32	356	696	664	32	56	25
8-501-0814-19	14.0	BB	19	8	64	112	32	356	696	664	32	56	25

\*Minimum Ultimate Load is 4 times the Working Load Limit.

\*\*BB: Bronze Bushing