

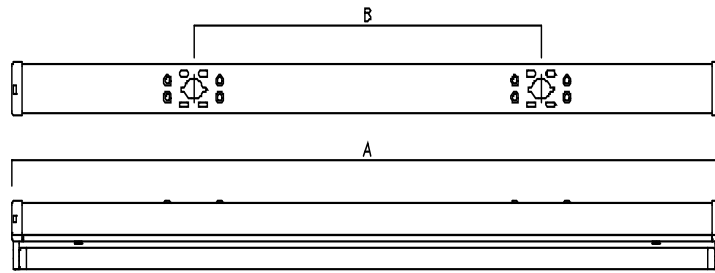


## Data Specification Sheet

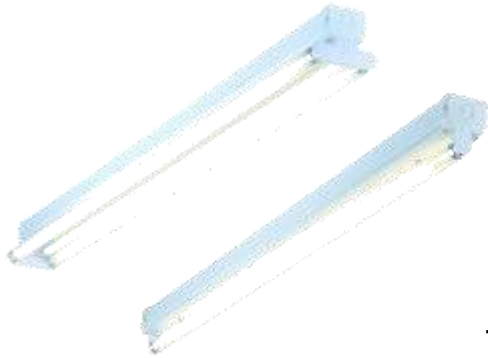

SIZE	A	B
18W	617	417
36W	1227	600
58W	1527	600
70W	1791	600



### T8 Batten Fluorescent Fittings

ML Accessories Code	T8118HF	T8136HF T8136EMHF	T8158HF T8158EMHF	T8170HF T8170EMHF	T8218HF T8136EMHF	T8236HF	T8258HF	T8270HF
<b>Wattage</b>	18W	36W	58W	70W	2x18W	2x36W	2x58W	2x70W
<b>Description</b>	High Frequency Fluorescent T8 Battens							
<b>Finishes available</b>	White							
<b>Overall dimensions</b>	See above diagram							
<b>Fixing Centres</b>	See above diagram							
<b>Typical location</b>	Indoor							
<b>Accessories available</b>	Reflectors (Powder coated white mild steel) T8136HF-T8170HF, T8236HF-T8270HF Prismatic Diffusers T8136HF-T8170HF, T8236HF-T8270HF							
<b>Lamp Supplied</b>	No							
<b>Voltage (V)</b>	220-230V 50Hz							
<b>Class</b>	Class I. Must be Earthed							
<b>IP</b>	IP20							
<b>Photometric Testing</b>	Yes							
<b>Instruction sheet</b>	Yes							
<b>Origin of manufacture</b>	China							
<b>Main materials:</b>								
<b>Body</b>	Powder Coated Mild Steel							
<b>Method of fix</b>	Direct to ceiling or chain							
<b>Lamp holder cap</b>	G5							
<b>Lamp type</b>	T8							
<b>Electrical Connections</b>	10A L.E.N. Nylon Connector, Screw Terminals							
<b>Running Gear / Make / Operating Temperature</b>	Knightsbridge Soft Start H.F. Electronic ballast Knightsbridge Soft Start H.F. Electronic ballast c/w integral Inverter & Battery Pack  - 20°C to +30°C							
<b>Dimmable</b>	No							
<b>Cold Store Version - 20°C</b>	No							
<b>CE mark</b>	Yes							
<b>Quality Assurance System</b>	Yes ISO 9001 QMS							
<b>Batch coding details</b>	Yes							
<b>Certificate of Conformity</b>	Yes							
<b>Manufactured in accordance</b>	EN60 598-2-1							
<b>Guarantee Period</b>	1 Year							