

70W LED Parking Garage Canopy




Features

- Lumileds LED, high luminous efficiency and long working life.
- High efficiency LED Driver, the wide range input voltage AC120-277V.
- Die Cast aluminium cooling design, high quality and better cooling for LED Tj < 85°C.
- Excellent Optics design, greatly improve the light utilization and evenness.
- Motion sensor Control Available (Option)


Product Applications

GL LED Parking Garage Canopy series can be widely used in indoor or outdoor lighting (Wet location), Excellent for Museums, Art Galleries, Shopping Malls, Parking Garage, Buildings, The lawn, and many more applications.

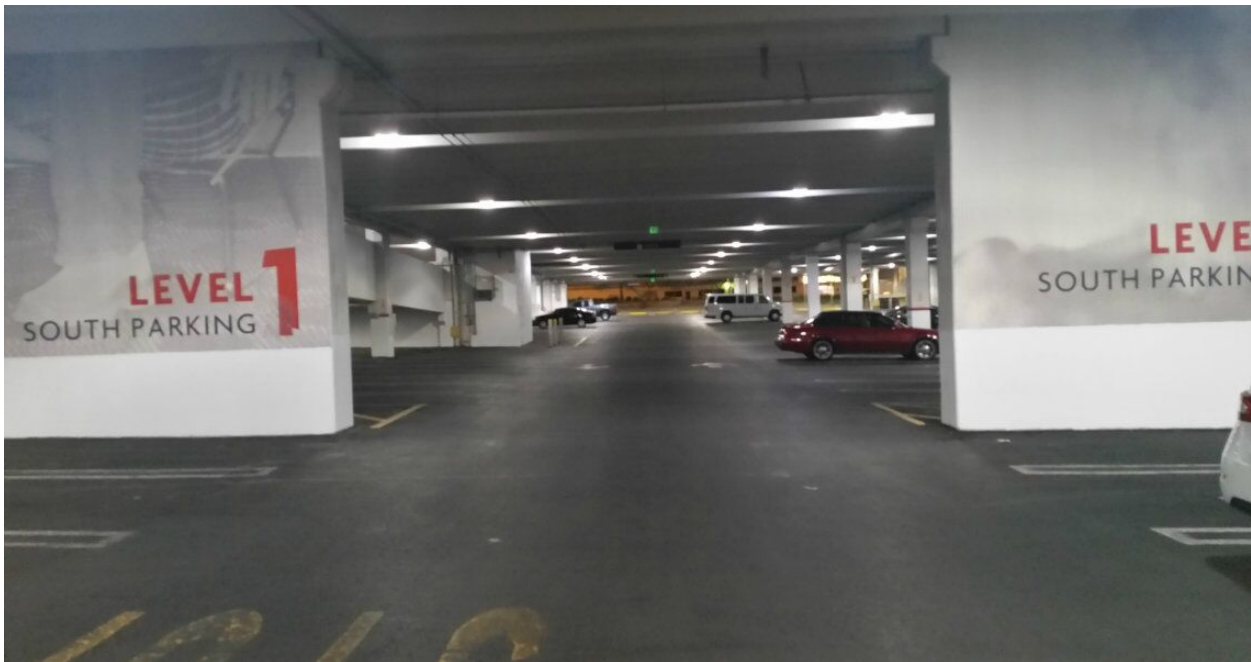

Specifications

Unit: inch

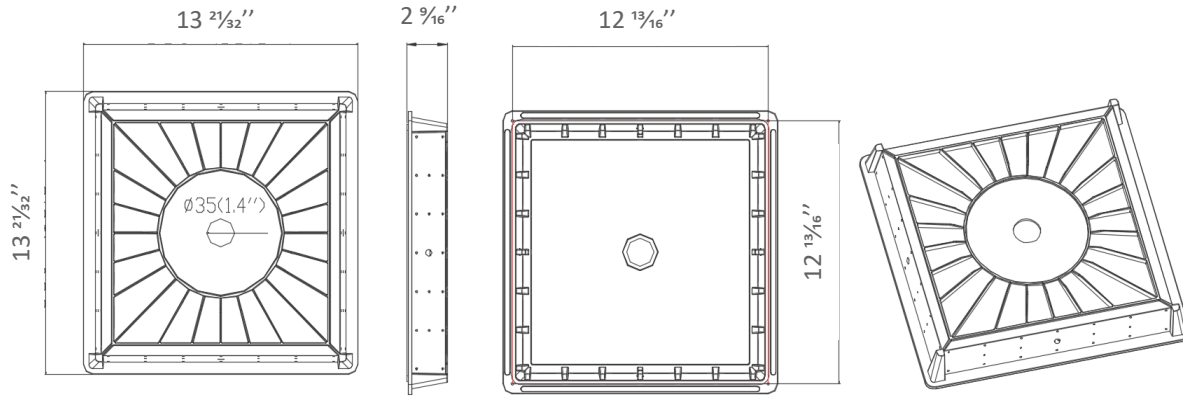

Structure Features

- Shell materials: Aluminum & PC.
- Finish: Dark Bronze/White
- Net weight: 4.228Kg (9.32 lbs)
- Product Size: 13 25/32" x 13 25/32" x 2 9/16"
- Carton Size: 16 29/32" x 16 27/32" x 6 17/32"
- Patent no. 201730117181.0

Technical Parameters

Power	70W	Lighting Angle	279°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	>0.95	Working Life	>50000 hrs
Driver Efficiency	>90%	Working Temperature	-30 - +45°C
Luminous Flux	8618 Lm	Storage Temperature	-40 -+80°C
Color Temperature	5000K	Protection Level	Wet Location/IP65
CRI	Ra>80	Cable	Input Connect, 0.3m
Uplight	15%	Light Source	Lumileds
Optional dimming function	1-10Vdc	LED Driver	OWN

Photometry

