


LED Aluminum Channel - CLOTHES RACK YD 1401



Clothes Rack YD 1401 is specially designed for illuminating closets. With hanging accessories, YD 1401 functions as clothes hanger bar, but also adds lights to your wardrobe.

Features

- Functions as hanger bar.
- Customizable.
- Anodized finish.
- Covers and protect LED strip light.
- Manufactured with a patented frosted diffuser for maximum lumen output and wider beam distribution.

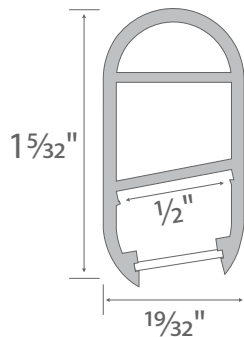

Specification

Length	118in, 94in, 24in
Internal width	1/2in
Finish	Silver
Diffuser	Milky
Material	Anodized Aluminum
Installation	Surface Mount, Hanging
Accessories	End cap, Mounting

Models

Model No.	Finish Color	Diffuser Type	Dimension (L x W xH)	Application
YD-1401-AL-9-M	Silver	Milky	118 x 1 9/32 x 1 5/32 in	Indoor, Outdoor
YD-1401-AL-8-M	Silver	Milky	94 x 1 9/32 x 1 5/32 in	Indoor, Outdoor
YD-1401-AL-2-M	Silver	Milky	24 x 1 9/32 x 1 5/32 in	Indoor, Outdoor

Accessories (Sold Separately)

Mounting Accessories



YD 1401 End Caps
YD-1401-EC




YD 1401 Hanging Brackets
YD-1401-HK




YD 1401 Hanging Brackets
YD-1401-MB

Installation Diagram

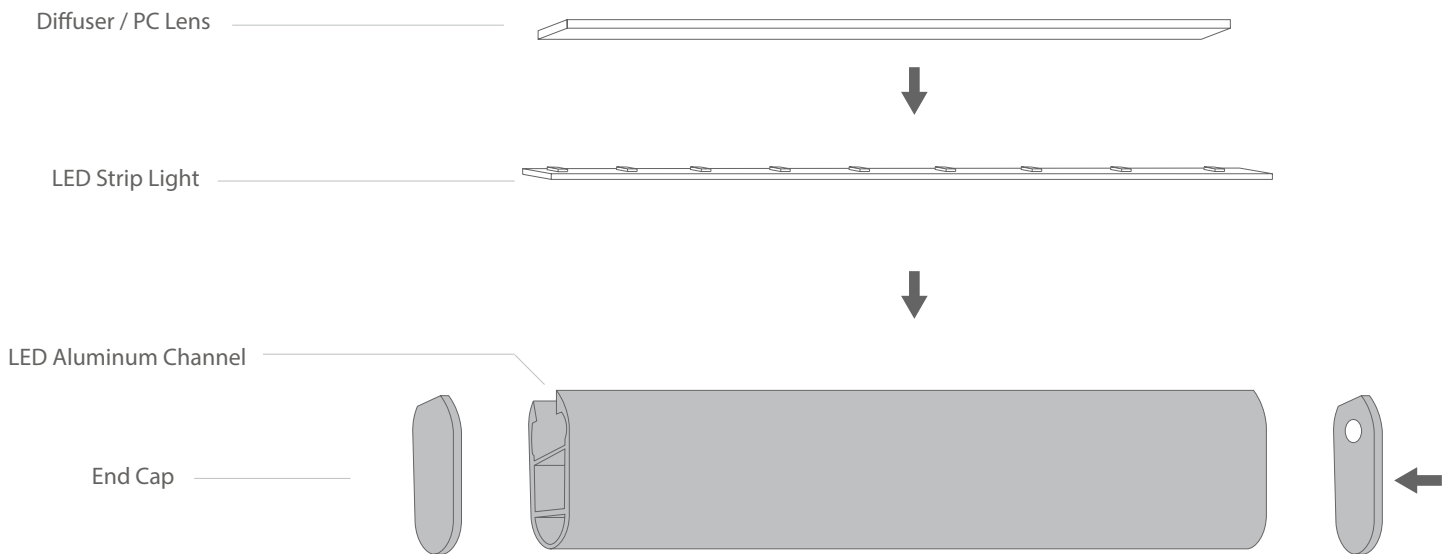


Mounting Options

Hanging

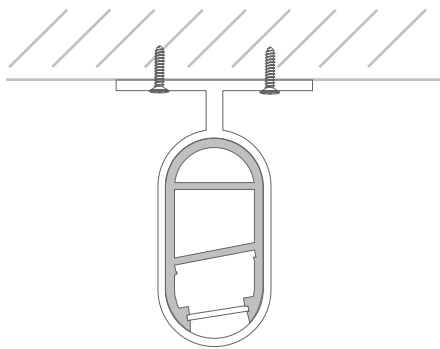


Surface mounting with Mounting Clips

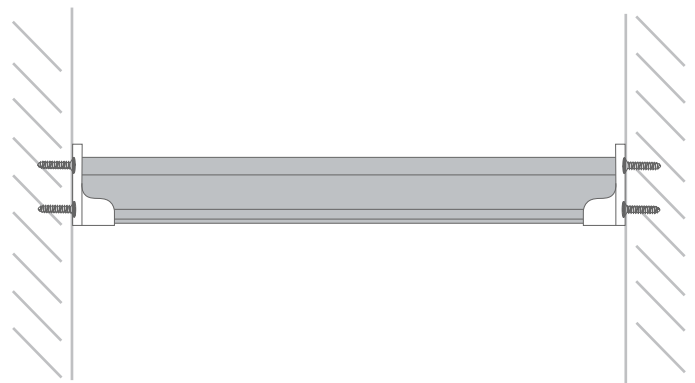

Surface mounting with Screws

Compatible LED Strip Lights

	Series	Model No.	Width	LED Quantity	Light Filling Level	Hotspots Level
	INFINITE	GL-3528-120-xxxxK-24V-IP20-CC	1 ³ / ₃₂ in	34 LEDs/ft	Full	No Hotspot
	ECO	GL-3528-112-xxxxK-xxV-IPxx	1 ³ / ₃₂ in	34 LEDs/ft	Full	No Hotspot
	PRO	GL-3528-240-xxxxK-24V-IPxx	1 ³ / ₃₂ in	73 LEDs/ft	Full	No Hotspot
	LEGEND	GL-2835-240-xxxxK-24V-IPxx	1 ³ / ₃₂ in	73 LEDs/ft	Full	No Hotspot
	NARROW	GL-3528-120-xxxxK-12V-IP20-5MM	3 ¹ / ₁₆ in	36 LEDs/ft	Full	No Hotspot
	COB	GL-COB-480-xxxxK-24V-IP20	1 ³ / ₃₂ in	145 LEDs/ft	Full	No Hotspot
	TUNABLE WHITE	GL-2835-240-CCT-24V-IP20	1 ³ / ₃₂ in	73 LEDs/ft	Full	No Hotspot
	FOR BREAD	GL-2835-60-2500K-12V-IP20-B	1 ³ / ₃₂ in	18 LEDs/ft	Full	Partial Hotspot
	FOR MEAT	GL-2835-60-2900K-12V-IP67-M	1 ³ / ₃₂ in	18 LEDs/ft	Full	Partial Hotspot
	RGB HIGH BRIGHT	GL-5050-60-RGB-xxV-IPxx	1 ³ / ₃₂ in	18 LEDs/ft	Full	Partial Hotspot
	RGB SUPER BRIGHT	GL-3535-120-RGB-24V-IPxx	1 ³ / ₃₂ in	34 LEDs/ft	Full	No Hotspot
	RGBW	GL-5050-96-RGB+xxxxK-24V-IP20	1 ⁵ / ₃₂ in	29 LEDs/ft	Full	Partial Hotspot
	RGB DIGITAL	GL-5050-60-DIG-12V-IPxx	1 ³ / ₃₂ in	18 LEDs/ft	Full	Partial Hotspot

Light Filling Level



Full



Partial

Hotspots Visible Level



No Hotspot



Partial Hotspot



Hotspot

Note:

We recommend to use two, or more, LED strips in a shallow channel that has internal width that is greater than .8in to prevent partial filling.

Note:

When LEDs are used with aluminum channel there may be hot spots. The more depth of a channel, and/or density of a LED, can help reduce visible hot spots