


## 360° LED Neon Flex - Vertical Lifting-Single Color

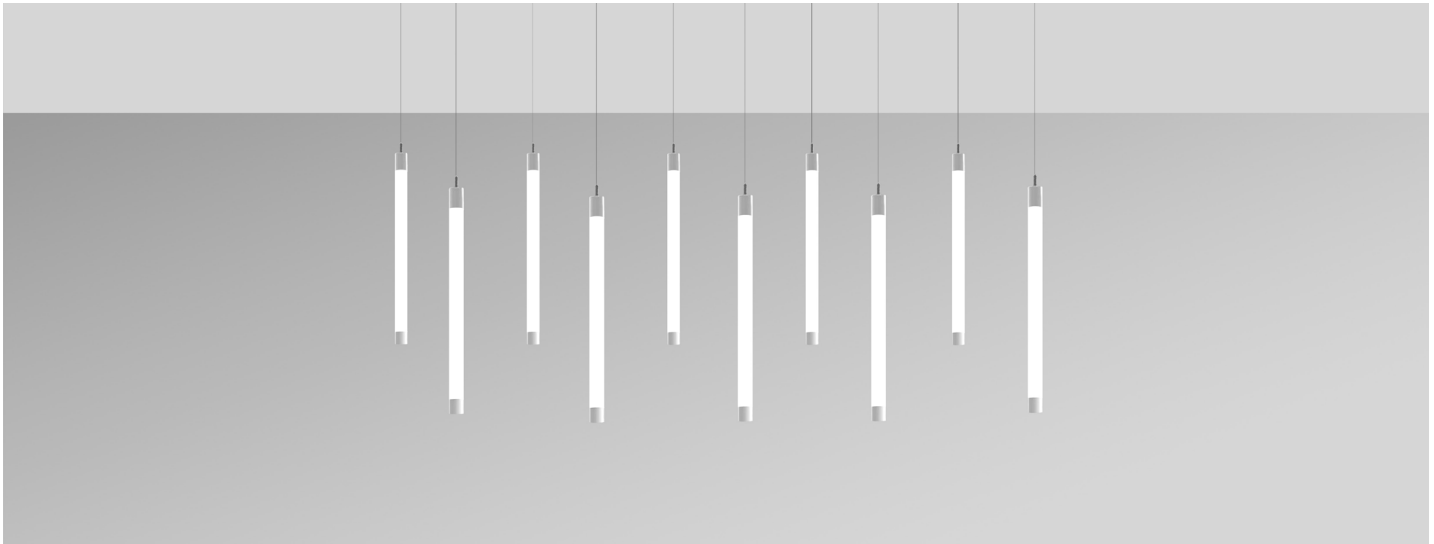

The 360° glowing LED neon lights present simultaneous aesthetics and flexibility, enabling the creation of an unparalleled and astonishingly eye-catching appearance. Crafted with highly durable, skin-friendly silicone gel materials, the dimmable neon light series offers a wide range of light color options, including static white, RGB, tunable, and static colors, delivered uniformly and seamlessly. Freely bending and twisting the neon lights unlocks the versatility of aesthetic shapes for superior lighting and decorations. Compatible accessories are available to complete the effortless installation of the neon light on walls and ceilings.

### Features

- 360° glowing of uniform and seamless light.
- Highly flexible LED neon lights; freely bending and twisting for artistic lighting decorations.
- Made with durable silicone materials; flame, saltwater, and solvent resistant.
- Vertical lifting maximum length 6.5'.
- IP54 rating is ideal for dry location applications.
- Dimmable with PWM, forward phase, triac, 0-10V, MLV, and ELV.
- 36,000-hour lifespan with 5 years limited warranty.
- UL listed.




### Specification

<b>Input Voltage</b>	12VDC		
<b>Dimmable</b>	PWM, Forward phase, Triac, 0-10V, MLV, ELV		
<b>Color Temp. (CCT)</b>	2700K	3000K	4000K
<b>Brightness</b>	900lm	975lm	1050lm
<b>Light Efficacy</b>	60lm/w	65lm/w	70lm/w
<b>Power Consumption</b>	3W/ft		

<b>Maximum Length</b>	6.5'
<b>LED Chip</b>	2835
<b>Operating Temperature</b>	-13°F~131°F
<b>Lumen Maintenance</b>	36,000 hrs
<b>CRI</b>	90+
<b>IP Rating</b>	IP54 (Dry location)

## Dimension

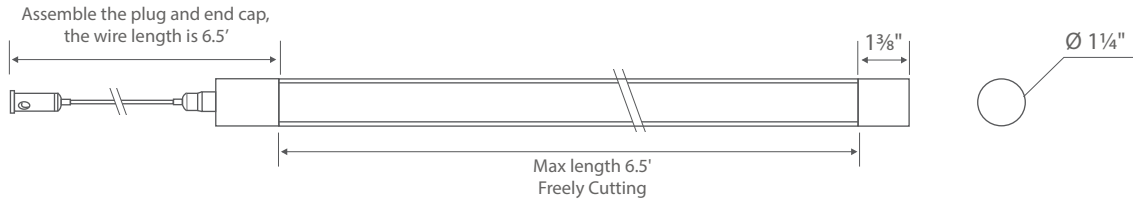


## Order Information

Series	Color Temperature	Voltage	IP Rating	Mounting	Length (ft)	Length (inch)	Power Supplies
GL - 360N-VL	27K-2700K 30K-3000K 40K-4000K	12V	IP54	SFB-Surface Mount, Bottom Feed Lead Wire SFS-Surface Mount, Side Feed Lead Wire SFBC1-Surface Mount, Bottom Feed Lead Wire with Canopy (Ø5 1/2") SFBC2-Surface Mount, Bottom Feed Lead Wire with Canopy (Ø9") SFBC3-Surface Mount, Bottom Feed Lead Wire with Canopy (Ø18 1/2") SSB-Suspended Mount, Bottom Feed Lead Wire SSS-Suspended Mount, Side Feed Lead Wire SSBC1-Suspended Mount, Bottom Feed Lead Wire with Canopy (Ø5 1/2") SSBC2-Suspended Mount, Bottom Feed Lead Wire with Canopy (Ø9") SSBC3-Suspended Mount, Bottom Feed Lead Wire with Canopy (Ø18 1/2")	1-1' 2-2' 3-3' 4-4' 5-5' 6-6'	0-0" 1-1" 2-2" 3-3" 4-4" 5-5" 6-6" 7-7" 8-8" 9-9" 10-10" 11-11"	ND-Non-Dimmable TD-Triac Dimming ED-ELV Dimming OD-0-10V Dimming


Max length 6.5'

## Installation Options


Mounting (Power feed)

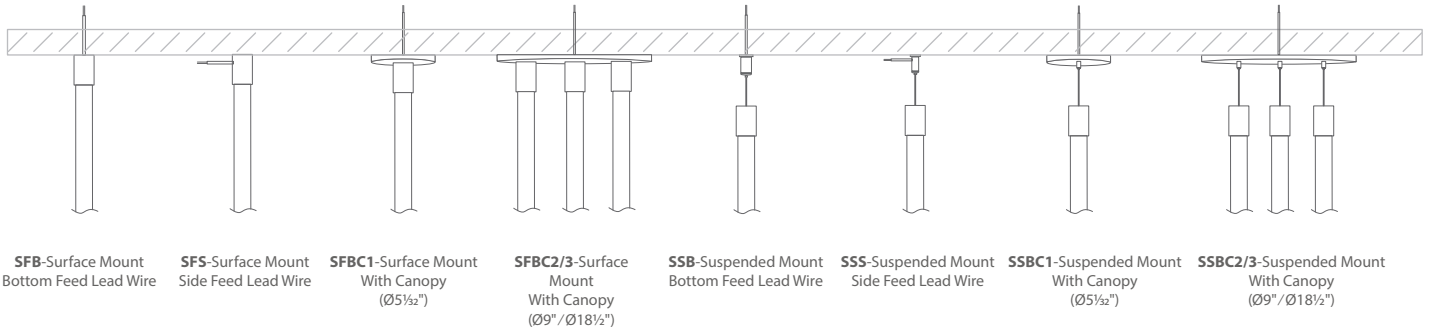

## Accessories

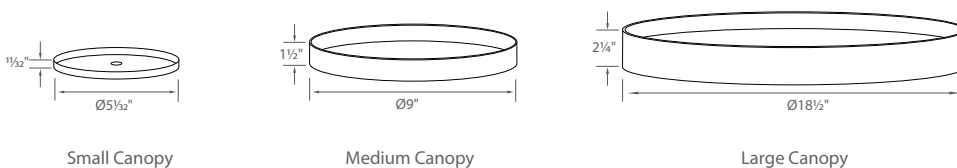

## Light Distribution

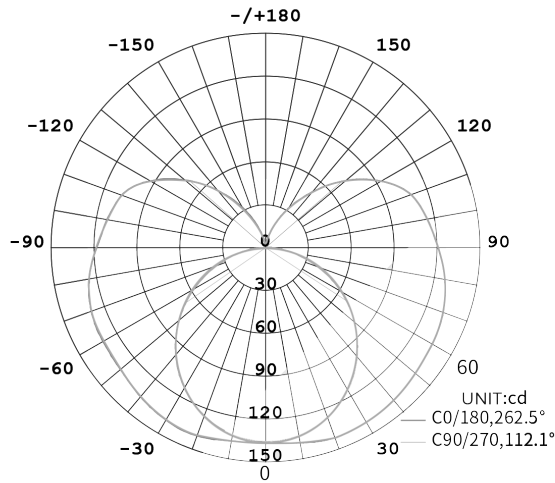


AVERAGE BEAM ANGLE(50%):187.3 DEG  
**Light distribution**

## Recommended Transformer (Sold Separately)

### LED Dimmable Transformer - 5 in 1 dimming


G Series

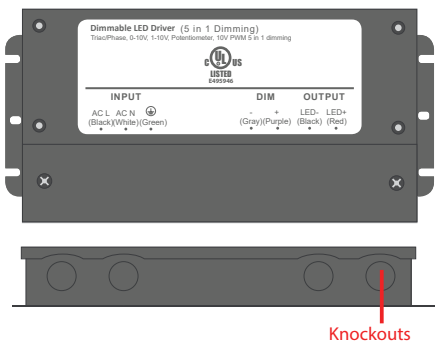

Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
G-100W-12V	12V	100W	8 <sup>2</sup> / <sub>32</sub> "x3 <sup>3</sup> / <sub>4</sub> "x1 <sup>2</sup> / <sub>32</sub> "	FCC, UL, Class 2

### LED Dimmable Transformer - Triac

P Series

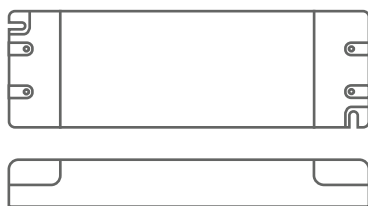


Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
P-50W-12V	12V	50W	7 <sup>1</sup> / <sub>32</sub> "x2 <sup>1</sup> / <sub>32</sub> "x1 <sup>5</sup> / <sub>16</sub> "	FCC, UL, Class 2

Mini Transformer Wiring Diagram (In Junction Box)

\*This diagram is for references only. Please see LED Mini Dimmable Transformer Specification for a more accurate diagram.

GL LED US LIGHTING reserves the right to modify this specification without prior notices.


## LED Mini Dimmable Transformer - ELV

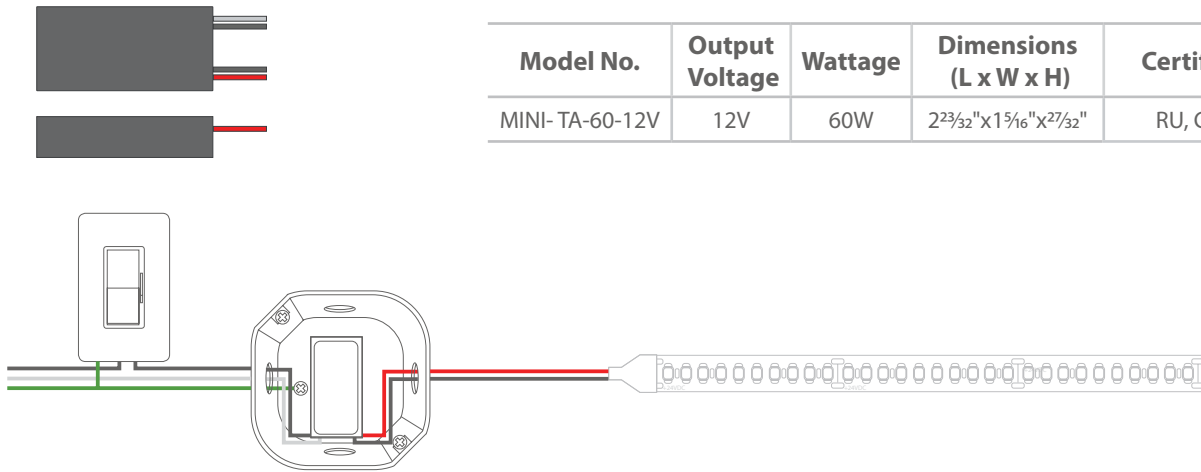


Mini Transformer Wiring Diagram (In Junction Box)

\*This diagram is for references only. Please see LED Mini Dimmable Transformer Specification for a more accurate diagram.

## LED Non-Dimmable Transformer

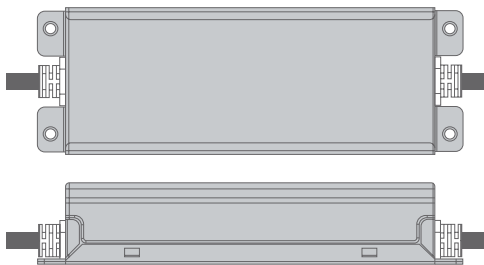

Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
APV-8W-12V	12V	8W	2 <sup>5</sup> / <sub>16</sub> "x1 <sup>7</sup> / <sub>32</sub> "x2 <sup>9</sup> / <sub>32</sub> "	CE, RU, Class 2
APV-35W-12V	12V	35W	3 <sup>5</sup> / <sub>16</sub> "x2 <sup>7</sup> / <sub>32</sub> "x1 <sup>7</sup> / <sub>32</sub> "	CE, RU, Class 2
FP-60W-12V	12V	60W	6 <sup>19</sup> / <sub>32</sub> "x1 <sup>7</sup> / <sub>32</sub> "x1 <sup>13</sup> / <sub>16</sub> "	CE, RU, Class 2
XLG-100W-12V	12V	100W	5 <sup>17</sup> / <sub>32</sub> "x2 <sup>1</sup> / <sub>2</sub> "x1 <sup>9</sup> / <sub>32</sub> "	CE, RU
XLG-150W-12V	12V	150W	7 <sup>3</sup> / <sub>32</sub> "x2 <sup>1</sup> / <sub>2</sub> "x1 <sup>13</sup> / <sub>32</sub> "	CE, RU

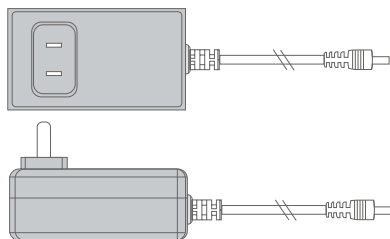

Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
DVE-12W-12V	12V	12W	3 <sup>23</sup> / <sub>32</sub> "x1 <sup>23</sup> / <sub>32</sub> "x1 <sup>13</sup> / <sub>16</sub> "	UL, FCC, CE
TPS-36W-12V	12V	36W	3 <sup>23</sup> / <sub>32</sub> "x1 <sup>23</sup> / <sub>32</sub> "x1 <sup>13</sup> / <sub>16</sub> "	UL, FCC, CE
TPZ-60W-12V	12V	60W	3 <sup>23</sup> / <sub>32</sub> "x1 <sup>23</sup> / <sub>32</sub> "x1 <sup>13</sup> / <sub>16</sub> "	UL, FCC, CE
TPZ-96W-12V	12V	96W	7"x3 <sup>3</sup> / <sub>32</sub> "x1 <sup>13</sup> / <sub>16</sub> "	UL, FCC, CE