

LED Ladder Light



Product Description

LED Ladder Lights has Special secondary light dissipation lens with uniform lightness.

Features

- Curtain design, easy installation.
- Special secondary light dissipation lens with uniform lightness.
- Adopt aluminum PCB is easy to dissipate heat.
- Products can be cut according to customer needs.
- 3M glue on the back of buckle position, 1ft (30cm) leads on top and bottom.
- JYD2-C-4305-V2, Coverage 21"(W) x 50"(H).
- JYD2-C-9310-V2, Coverage 42"(W) x 50"(H).



Application

Light box: Use for light box back light, 2 inches deep without dark spots.

Specification


Model No.	Dimension	CCT	Input Voltage	LED per unit	Power	Brightness	View Angle	CRI	IP Rate	Operating Temperature	Storage Temperature
JYD2-C-4305-5-V2	17"(W) x 45"(H) x 3/8"(D)	6500K	12V	5 LED/row, 12 rows	4.8w/Row, 57.6W per unit	99.51 lm/w 5550 LM	160°	80	60	-40°F (-40°C)~ 176°F (80°C)	-40°F (-40°C)~ 176°F (80°C)
JYD2-C-9310-10-V2	36 1/2"(W) x 45"(H) x 3/8"(D)			10 LED/row, 12 rows	9.6w/Row, 115.2W per unit	99.14lm/w 10338 LM					

GL LED US LIGHTING reserves the right to modify this specification without prior notices.

Dimension & Installation

Unit: Inch

JYD2-C-4305-V2

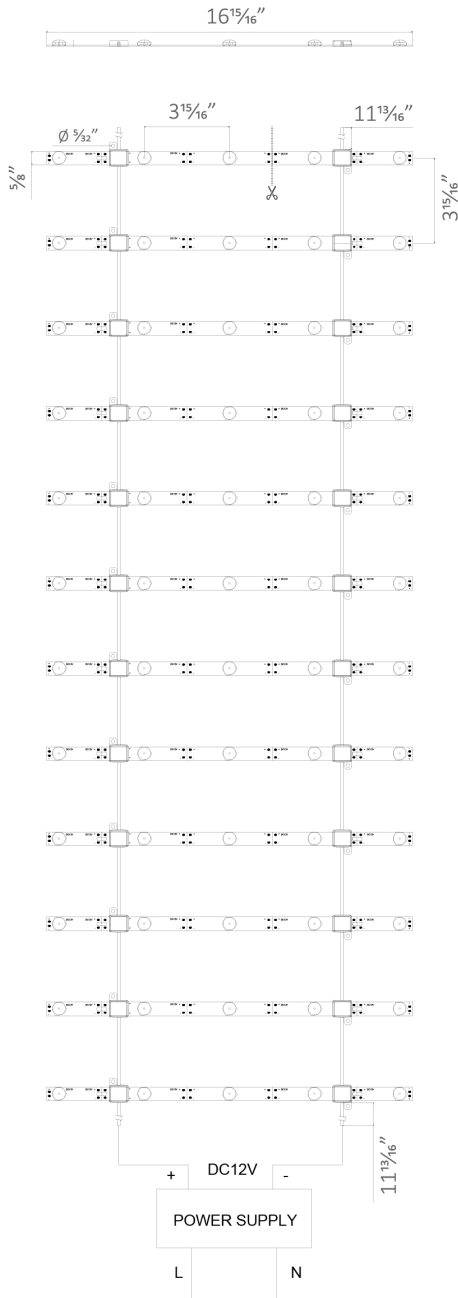

JYD2-C-9310-V2

