


LED Strip Light - **NARROW Series**

This flexible LED light strip NARROW is great for small aluminum channel or other limit space. Using 600 LEDs, Commercial grade of 93+ Color Rendering Index (CRI) light, the flexible light strip emits up to 5,559 lumens of powerful illumination.

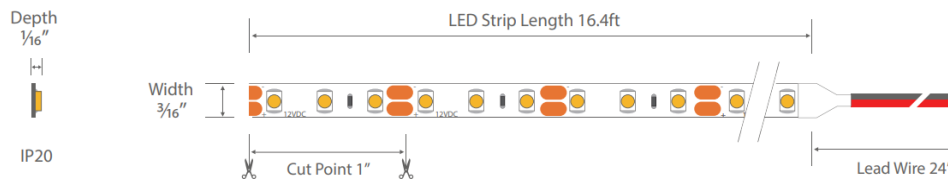
Features

- Slim, flexible and cuttable design allows for easy installation and illuminates every edge with light.
- Perfect for small aluminum channels with only 5mm width.
- Easy installation featuring 3M VHB adhesive backing.
- Dimmable available with PWM, Forward phase, Triac, 0-10V, MLV, ELV.
- 50,000h long lifespan with 5 years limited warranty.
- UL listed.

**Specification**

Input Voltage	12VDC		
Dimmable	PWM, Forward phase, Triac, 0-10V, MLV, ELV		
Lead Wire	20 AWG, 2ft (2 Wires)		
Color Temperature	2700K	3000K	4000K
Brightness	238 lm/ft	270 lm/ft	339 lm/ft
Light Efficacy	79.3 lm/W	90 lm/W	113 lm/W
Power Consumption	3W/ft		

LED Quantity	36 LEDs/ft
No Voltage Drop	16.4 ft MAX
LED Chip	3528
Operating Ambient Temperature	-13°F~104°F
LED Lifetime	50,000 hrs
CRI	90+
IP Rating	IP20 (Dry location)

Dimension**Order Information**

LED Type	LED Quantity per Meter	Color Temperature	Voltage	IP Rate	Special Features
GL -					
	3528	120	2700K 3000K 4000K	12-12VDC	IP20-Nonwaterproof
					5MM-Width 5mm

Voltage Drop Guidance Chart

This table provides general guidelines for determining Wire Gauge based on total load and distance from LED transformer to beginning of luminaire.

12V Voltage Drop & Wire Length Distance Chart (3% Drop or 11.64V)

Wire Gauge (AWG)	10W 0.83A	20W 1.7A	30W 2.5A	40W 3.3A	50W 4.2A	60W 5A
20	18ft	9ft	6ft	5ft	4ft	3ft
18	34ft	17ft	11ft	8ft	6ft	5ft
16	54ft	27ft	18ft	13ft	10ft	9ft

Step 1: Calculate Total Load: Check the power consumption of the LED light (e.g. 3W/ft). Calculate the total load of the LED light based on the light length (e.g. 10ft). The total load is 3W/ft x 10ft = 30W.

Step 2: Find Distance from Transformer to the Light Beginning: Check the distance between the transformer to the beginning of the light onsite. Let's assume it is 10ft. Round up to the nearest one on the table (Column 30W), which is 11ft.

Step 3: Choose Suitable Wire Gauge: According to the table (Column 30W & Row 11ft), it's recommended to use 18AWG or up wire between the transformer and LED light to eliminate voltage drop.

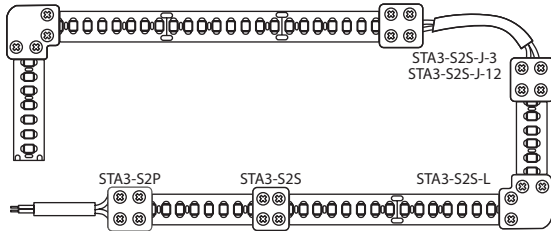
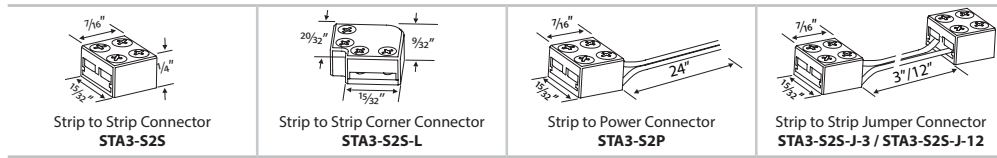
Note: This table is calculated based on the theoretical voltage drop formula. The wire quality, the LED light technology and environment conditions affect the result also. This table is only for reference.

LED Strip Light Comparison Chart


	Series	Features	Color Temperature	Input Voltage	Lumen Output	No Voltage Drop	Power	CRI
	DIM TO WARM	Light Efficacy 105LM/W	1800K~3000K	24VDC	Up to 462 lm/ft	16.4ft Max	4.4W/ft	97+
	INFINITE	Max Run 65.6ft	2400K, 2700K, 3000K, 3500K, 4000K	24VDC	Up to 234 lm/ft	65.6ft Max	3W/ft	90+
	ECO	Cost Effective	2700K, 3000K, 3500K, 4000K	24VDC	Up to 348 lm/ft	16.4ft Max	3W/ft	90+
	PRO	73 LEDs/ft	2700K, 3000K, 3500K, 4000K	24VDC	Up to 575 lm/ft	16.4ft Max	4.4W/ft	90+
	LEGEND	Brightest CRI 97+	1800K, 2700K, 3000K, 3500K, 4000K, 6000K, Blue, Red	24VDC	Up to 848 lm/ft	16.4ft Max	7W/ft	97+
	LEGEND-3	0.2in Width	2700K, 3000K, 4000K	12VDC	Up to 268 lm/ft	16.4ft Max	3W/ft	97+
	NARROW	0.2in Width	2700K, 3000K, 4000K	12VDC	Up to 339 lm/ft	16.4ft Max	3W/ft	90+
	COB	Seamless	2700K, 3000K, 4000K, 6000K	24VDC	Up to 416 lm/ft	16.4ft Max	4.4W/ft	90+
	FOR SAUNA	High temperature Resistance	2700K, 3000K, 4000K, 6000K	24VDC	Up to 287 lm/ft	16.4ft Max	3W/ft	90+
	SIDE BEND	Bendable & Cut Flexible	2700K, 3000K, 4000K, 6500K	12VDC	Up to 457 lm/ft	16.4ft Max	4.4W/ft	90+
	SPI	Light Chasing	2700K, 3000K, 4000K	12VDC	Up to 301 lm/ft	16.4ft Max	4.4W/ft	90+
	FOR BREAD	Fresh Bread	2500K	12VDC	Up to 200 lm/ft	16.4ft Max	4.4W/ft	97+
	FOR MEAT	Fresh Meat	2900K	12VDC	Up to 200 lm/ft	16.4ft Max	4.4W/ft	97+

Accessories (Sold Separately)

STA3 Series provide an easier and more secure connection for Low Voltage LED strip lights.



- Solderless screw tight.
- Load large current, up to 10A.
- Suitable for width 0.31 and 0.39in LED strip light.
- Suitable for both low density and high density LED strip light.
- All STA3 connectors are **Non-Waterproof**. Extra steps are needed when connecting waterproof strip lights.

Recommended Transformer (Sold Separately)**LED Dimmable Transformer - 5 in 1 dimming**



Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
G-100W-12V-DWJ	12V	100W	8 ²¹ / ₃₂ "x3 ³ / ₄ "x1 ²³ / ₃₂ "	FCC, UL, Class 2
G-200W-12V-DWJ	12V	200W	10 ⁹ / ₃₂ "x4 ⁵ / ₃₂ "x1 ¹⁵ / ₁₆ "	FCC, UL, Class 2
G-300W-12V-DWJ	12V	300W	10 ¹⁵ / ₁₆ "x4 ⁴ / ₃₂ "x1 ²⁹ / ₃₂ "	FCC, UL, Class 2
G-150W-12V-DWL	12V	300W	14 ⁷ / ₃₂ "x1 ⁹ / ₃₂ "x2 ⁹ / ₃₂ "	FCC, UL, Class 2

LED Dimmable Transformer- ELV dimming**ETF Series**

Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
ETF-60W-12V-TDA	12V	60W	3 ¹ / ₂ "x1 ¹ / ₂ "x1 ¹ / ₂ "	UL, Class 2, Class P

LED Dimmable Transformer - Triac**P Series**

Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
P-50W-12V	12V	50W	7"x2 ¹³ / ₃₂ "x1 ¹⁵ / ₁₆ "	FCC, ETL

LED Non-Dimmable Transformer

Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
APV-8W-12V	12V	8W	2 ⁷ / ₈ "x1 ¹ / ₁₆ "x ⁷ / ₈ "	CE, RU, Class 2
APV-35W-12V	12V	35W	3 ³ / ₈ "x2 ¹ / ₄ "x1 ¹ / ₃₂ "	CE, RU, Class 2
LPV-60W-12V	12V	60W	6 ¹³ / ₃₂ "x1 ¹¹ / ₁₆ "x1 ¹ / ₃₂ "	CE, RU, Class 2
XLG-100W-12V	12V	100W	5 ⁷ / ₃₂ "x2 ¹ / ₂ "x1 ¹ / ₃₂ "	CE, RU
XLG-150W-12V	12V	150W	7 ⁷ / ₃₂ "x2 ¹ / ₂ "x1 ¹ / ₁₆ "	CE, RU
OMP-200W-12V	12V	200W	8 ³ / ₁₆ "x2 ¹ / ₈ "x1 ¹ / ₁₆ "	CE, RU, FCC
OMP-300W-12V	12V	300W	9 ² / ₃₂ "x2 ¹⁹ / ₃₂ "x1 ¹ / ₁₆ "	CE, RU, FCC

Model No.	Output Voltage	Wattage	Dimensions (L x W x H)	Certificates
DVE-12W-12V	12V	12W	2 ¹ / ₁₆ "x1 ¹ / ₁₆ "x1"	UL, FCC, CE
TPS-36W-12V	12V	36W	3 ¹ / ₁₆ "x2 ¹ / ₂ "x1 ¹ / ₁₆ "	UL, FCC, CE
TPZ-60W-12V	12V	60W	4 ¹ / ₁₆ "x2 ³ / ₃₂ "x1 ¹ / ₁₆ "	UL, FCC, CE

Aluminum Channel Options (Sold Separately)