



LANDSCAPE EDGING

10 FEET LONG

SAFETY EQUIPMENT:



Leather or Cut Resistant Gloves



Safety Glasses



Hearing Protection



Outside Space or a Well-Ventilated Area




HOW TO!
Scan to watch
instructional video

INSTALLATION OPTION 1

TOOLS: Hammer, Block of Wood


1. Remove any shipping wrapping.
2. Layout edging in desired area.
3. With one hand, hold edging upright. With the other hand, hold a block of wood (or a flat, thick object) directly on top of the garden edging. Tap the top of the block with a hammer (the wood block will act as a buffer to prevent damage to edging while installing) until garden edging is secured in the ground.
4. Make sure to use 1 in Metal Roofing Screws or self-drilling sheet metal screws. Overlap the corrugate, and use screws to secure the two panels together.

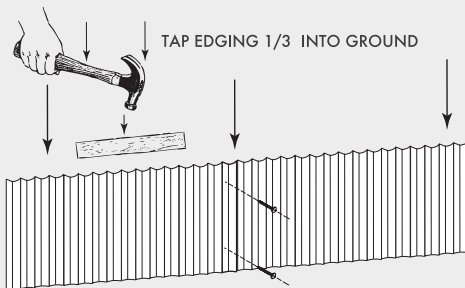

INSTALLATION OPTION 2

TOOLS: Screw Gun, Wooden Garden Stakes

1. Remove any shipping wrapping.
2. Drive garden stakes into desired garden edging location.
3. Use self-drilling sheet metal screws. Use screw gun to screw edging to stakes.

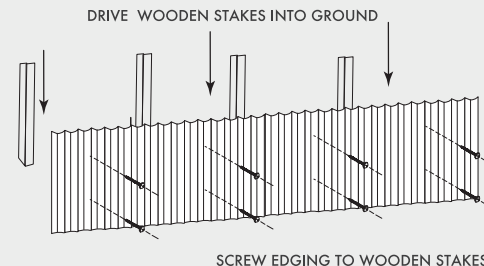

Questions? Visit us online at www.dakotatin.com

or call 1-800-670-5798   /dakotatinceiling  /dakotatin