

Installation Guide: 5289

Thank-you for purchasing of the 5289 Timer. As a commitment to efficiency, the environment and to save costs, the timer can offers you power savings

Features:

- ✓ Still have warm dry towels when you need one.
- ✓ Saves you power and money
- ✓ Easy to install
- ✓ No programming required
- ✓ No noise – no buzzing or ticking
- ✓ Concealed in the wall behind the switch plate
- ✓ Suitable for any heated towel trail
- ✓ Environmentally friendly

Function:

The timer turns ON twice a day, 12 hours apart. The ON period can be adjusted from 1-12 hours. Three heat settings can be selected 50%, 75% or 100%.

Programming:

When turned ON the timer beeps once every second for 12 seconds. If the timer is turned OFF after 4 seconds (example) the timer will be set for 4 hours and this is stored in the memory. This means the timer will be on for 4 hours and off for 8 hours. This will happen two times a day at 12hr intervals.

The dimmer feature is selected after the ON time has been selected. The timer will confirm the number of hours selected with a beep representing an hour. This will be followed with a single, a double and a tripe beep. If the timer is turned OFF after the first beep the timer is set for 50% heat setting and this is stored in memory, 2 beeps = 75% heat setting and 3 beeps = 100% heat setting.

An example as follows:

Turn ON/4 beeps/Turn OFF/Turn On, listen for 4 beeps

Wait for the pause

Turn OFF after two beeps/Turn ON

This means your timer will turn on for 4hrs twice a day and be off 8hrs twice a day at a heat setting of 75%.


Reset:

To reset, turn the timer ON for approximately 30 seconds before turning it back off.

The next time you turn on the timer it will start off with 12 beeps.

Specifications:

Input	AC220-240V 50Hz
Load	15W – 30W
No load device power	Less than 1 Watt
Operating temperature	-10°C to 40°C

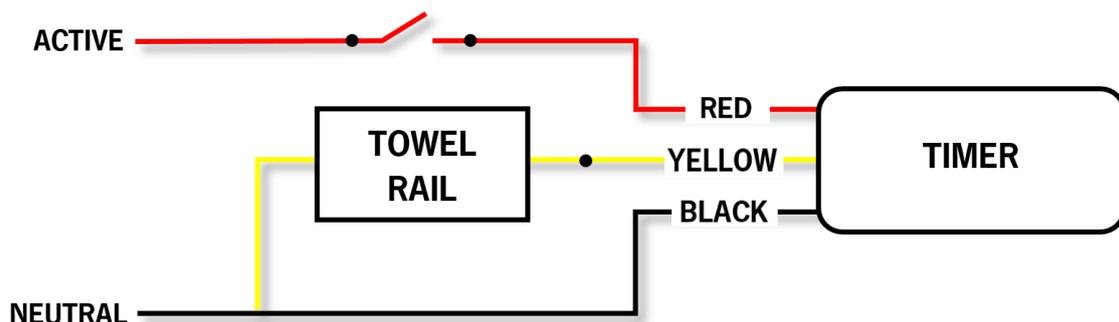

! IMPORTANT SAFETY PRECAUTIONS !

- ⚠ The device must be installed by a registered electrician.
- ⚠ The device is designed as a timer and dimmer for a heated towel rail only.
- ⚠ Maximum load is 300Watts at AC 220-240V 50Hz.
- ⚠ Not suitable for switching inductive loads or incandescent lighting.
- ⚠ Designed to be concealed behind the isolating switch in a typical wall cavity flush box.
- ⚠ There are no user serviceable internal parts and the product should be returned to the manufacturer for repair or replacement should damage or malfunction occur.
- ⚠ This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- ⚠ Children should be supervised to ensure that they do not play with the appliance.
- ⚠ DO NOT mega test. Components may be damaged

Note: A neon indicator can be added to the flush plate switch by your electrician to make it more obvious when the towel rail is on or off. This is for convenience only and is not mandatory.

Warranty:

Heat Direct warrants the purchaser against defeats in workmanship and material for a period of twenty-four months from the date of original purchase. Purchase receipts for this product are to be retained as proof of purchase and must be presented if making a claim under the terms of the Heat Direct warranty. This warranty does not extend to accessories (switch) or defects or injuries caused by or resulting from causes not attributable to faulty parts or the manufacture of the product, including but not limited to, defects caused by or resulting from misuse, abuse, neglect, accidental damage, improper voltage, liquid spillage, vermin infestation, software, or any alterations made to the product which are not authorised by Heat Direct.