

# VersaTouch<sup>®</sup>

## 92-220

Lightweight Nitrile Disposable Glove

NBR

Nitrile

## Light-duty protection for food handling

- Thin, lightweight and comfortable
- Textured fingertips for enhanced tactility
- Compliant with food handling requirements



### Industries

- Food Processing

### Recommended For

- All food processing, applications that have food contact

## TECHNICAL DATA SHEET

### PRODUCT INFORMATION

|  |  |
|--|--|
|  | <b>92-220</b>  |
| <b>Material</b>                          | Nitrile  |
| <b>Color</b>                             | White  |
| <b>Glove Design</b>                      | Chlorinated, Powder-Free, Textured Fingers   |
| <b>Cuff</b>                              | Beaded   |
| <b>Manufacturing/QMS Audit Standards</b> | ISO 9001:2008  |
| <b>Regulatory/Standards Compliance</b>   | Category III, EAC TP TC 019:2011, EC 1935/2004, EC 2023/2006, EN ISO 374-1:2016, EN 374:2003, EN 374:2003, EN 420:2003 + A1:2009, EN ISO 374-5:2016, FDA21 CFR 177-2600, ISO 9001, ISO 13485 |
| <b>Packaging</b>                         | 100 gloves per polybag;<br>10 polybags per case;<br>1000 gloves per Master polybag   |
| <b>Storage</b>                           | Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition  |
| <b>Country of Origin</b>                 | Malaysia   |
| <b>User Needs Segment</b>                | High Touch   |
| <b>Available sizes</b>                   | S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10), XXL (10.5 - 11)  |

### PHYSICAL PROPERTIES

|   | Typical Values      |                    | Testing Method      |
|---|---------------------|--------------------|---------------------|
| Length (mm/inches)                      | 240 / 9.5           |                    | ASTM D3767,EN420    |
| Freedom from Holes (Inspection level I) | 1.5 AQL             |                    | ASTM D5151,EN 455-1 |
| Palm Thickness (mm/inches)              | 0.05 / 2.0          |                    | ASTM D3767,EN420    |
| Finger Thickness (mm/inches)            | 0.07 / 2.8          |                    | ASTM D3767,EN420    |
|   | <b>BEFORE AGING</b> | <b>AFTER AGING</b> |                     |
| Force at break (N)                      | ≥ 6                 | ≥ 6                | EN 455-2            |

### Performance Standards and Regulatory Compliance



For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

#### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
Riverside Business Park  
Blvd International, 55  
1070 Brussels, Belgium  
T: +32 (0) 2 528 74 00  
F: +32 (0) 2 528 74 01

#### Asia Pacific Region

Ansell Global Trading Center  
(Malaysia) Sdn Bhd  
Prima 6, Prima Avenue  
Block 3512, Jalan Teknokrat 6  
63000 Cyberjaya  
Selangor, Malaysia  
T: +603 8310 6688  
F: +603 8310 6699

#### North America Region

Ansell Healthcare Products LLC  
111 Wood Avenue South,  
Suite 210  
Iselin, NJ 08830, USA  
T: +1 800 800 0444  
F: +1 800 800 0445

#### Latin America & Caribbean Region


Ansell Commercial Mexico S.A. de C.V.  
Blvd. Bernardo Quintana No. 7001-C,  
Q7001 Torre II,  
Suites 1304, 1305 y 1306,  
Col. Centro Sur, c.p. 76079  
Queretaro, Qro. Mexico  
T: +52 442 248 1544 / 248 3133

#### Australia

Ansell Limited  
Level 3,678 Victoria Street,  
Richmond, Vic, 3121  
Australia  
T: +61 1800 337 041  
F: +61 1800 803 578

#### Russia

Ahcenn PYC  
123610 Poccnr, Mockba  
Kpachonpechehckar  
Ha6. 12, n.3, op. 1304A  
Ten. +7 495 258 13 16

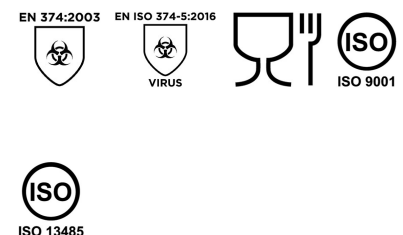

Ansell, <sup>®</sup> and <sup>™</sup> are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2019 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.