

INSTRUCTIONS

Center Caps // 2.01.0X.0X.XX

Safety Warning

Read all instructions and safety warnings prior to installation. Failure to do so could result in product damage, personal injury or even death.

- Stay alert! Watch what you are doing and use common sense while handling this product.
- Inspect product for damage prior to installation, do not use if product is in unsafe condition.
- Do not install product while under the influence of drugs, alcohol or medication.
- Always use safety equipment to prevent injuries. Approved face and eye protection must always be worn by the installer, as well as others in the work area.
- Do not over reach. Keep proper footing and balance at all times.
- Dress properly. Do not wear loose clothing or jewelry. Keep your hair, clothing and gloves away from moving parts.
- Keep your work area clean and well lit.



INSTRUCTIONS

Center Caps // 2.01.0X.0X.XX

Installation Instructions

Videos

Scan this QR code with your phone's camera to watch an installation video.

jansenmotorsports.com



Tools Required

- Floor jack
- Jack stands
- Lug wrench
- Torque wrench ft/lb
- Torque Wrench in/lb
- 3mm Allen wrench/Hex key

- 1 On a level surface, place the transmission in park and lock the parking brake.
- 2 Loosen wheel nuts slightly.
- 3 Elevate one side of the vehicle and place a suitable stand under the footrest frame.
- 4 Remove the wheel nuts and remove the wheel/tire.
- 5 Remove OEM center cap if it's not already missing.
- 6 With a damp clean cloth, clean the center bore of the wheel where the retaining ring will be installed.
- 7 Position the Jansen Motorsports center cap on the wheel in the orientation you desire.
- 8 Place retaining ring in to the back side of the wheel aligning the 3 holes to the threaded holes in the center cap (**figure 1**).
- 9 Insert all 3 mounting screws about half way.
- 10 Make sure your center cap is still aligned the way you like and tighten mounting screws to 2 Nm or 18 In-Lbs.

1



- 11 Re-install wheel/tire on to vehicle.
- 12 Install wheel nuts.
- 13 Lower vehicle to the ground and torque wheel nuts to OEM specification.
- 14 Re-torque wheel nuts as per OEM specifications.

Here at Jansen Motorsports, your satisfaction is our number one priority. Should you have any questions about this or any of our products, please call us at 1.800.756.7717.

INSTRUCTIONS

Center Caps // 2.01.0X.0X.XX

Parts Breakdown



Each Center Cap below is sold separately:


Item No.	Part No.	Description	Qty.
1	2-01-02-01	Black Center Cap 2	1
2	2-01-06-01	Black Center Cap 6	1
3	2-01-04-01	Black Center Cap 4	1
4	2-01-02-02	Gun Metal Grey Center Cap 2	1
5	2-01-06-02	Gun Metal Grey Center Cap 6	1
6	2-01-04-02	Gun Metal Grey Center Cap 4	1

Made In Canada | 160-34434 McConnell Road, Abbotsford, BC V2S 7P1 | A **TIGER TOOL** Brand

INSTRUCTIONS

Center Caps // 2.01.0X.0X.XX

Parts Breakdown

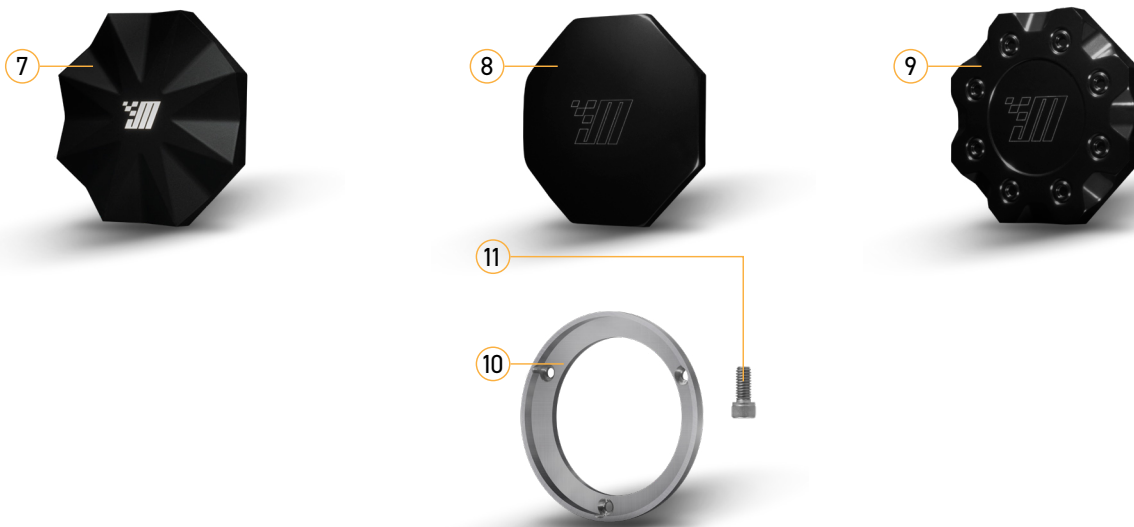

Each Center Cap below is sold separately:

Item No.	Part No.	Description	Qty.
7	2-01-01-01	Black Center Cap 1	1
8	2-01-05-01	Black Center Cap 5	1
9	2-01-03-01	Black Center Cap 3	1

Each Center Cap ships with the following:

Item No.	Part No.	Description	Qty.
10	2-Ring-1	Retaining Ring	1
11	92855A408	SHCS	3

Made In Canada | 160-34434 McConnell Road, Abbotsford, BC V2S 7P1 | A **TIGER TOOL** Brand