



# VISUAL IMPRESSIONS™

GLAZED CERAMIC WALL

WALL




AMERICAN OLEAN®  
PROVEN IN TILE™

AMERICANOLEAN.COM



# VISUAL IMPRESSIONS™

Create a masterpiece with the artistic edge of Visual Impressions, a contemporary and fashionable wall tile by American Olean®. Neutral colors and 3D patterns produce stunning works of art that you can feel, and integrate seamlessly thanks to large-format sizes with TruEdge™. Complete your look with coordinating jolly trim for a complementary, on-trend design.

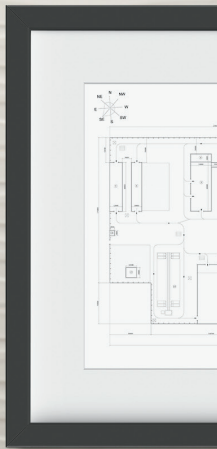

Cover photo features Visual Impressions White 8 x 24 Linear Diamond on the wall. Above photo features Visual Impressions Gray 8 x 24 Multi-Wave on the wall.

# VISUAL IMPRESSIONS™

GLAZED CERAMIC WALL

## WALL TILE – FLAT

---



WHITE VI10



GRAY VI12



BEIGE VI11

## WALL TILE – LINEAR DIAMOND

---



WHITE VI10



GRAY VI12



BEIGE VI11

## WALL TILE – MULTI-WAVE

---



WHITE VI10



GRAY VI12



BEIGE VI11

## WALL TILE – QUADRANGLE


---



WHITE VI10



GRAY VI12

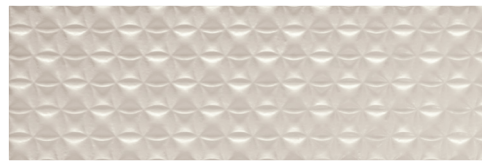

BEIGE VI11

## JOLLY TRIM

---



WHITE VI10



GRAY VI12




BEIGE VI11

# VISUAL IMPRESSIONS™

GLAZED CERAMIC WALL

## SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	8 x 24 Wall Tile	7-3/4" x 23-3/4" (19.75 cm x 60.42 cm)	5/16"	12.80	10

## TRIM

			NUMBER	PIECES/ CARTON
	Jolly	1/2 x 12	SI/212J	12

## INSTALLATION & PRICING

### RECOMMENDED GROUT JOINT:

Wall: 1/16" (1/8" when rectangular size is installed in a staggered brick-joint pattern; overlap should not exceed 33%.)

RELATIVE PRICING: Medium

### SHADE VARIATION



LOW  
(V1)

## PERFORMANCE CHARACTERISTICS


	ASTM#	WALL RESULT
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120-230 lbs.
Scratch Hardness	MOHS	4.0-6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: [americanolean.com/information/TestResults](http://americanolean.com/information/TestResults).

## USAGE

FLOORS	WALLS	COUNTERTOPS
	W	

## APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: [americanolean.com/Factors](http://americanolean.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [americanolean.com/LargeTiles](http://americanolean.com/LargeTiles) for more information.



POST-CONSUMER  
RECYCLED MATERIALS



TRU-EDGE™



PRE-CONSUMER  
RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2018 AMERICAN OLEAN (02/18)



AMERICAN OLEAN®  
PROVEN IN TILE™