



# IMPRESA™

GLAZED CERAMIC FLOOR, WALL & MOSAIC WITH REVEAL IMAGING®

FLOOR  
& WALL



AMERICAN OLEAN®  
PROVEN IN TILE™

AMERICANOLEAN.COM

# IMPRESA™

With the look of Brescia marble, Impresa is destined to be a timeless selection. Detailed graphics reveal a soft linear marble look that is modern in design and classic in style. A unique size offering with neutral colors makes this series adaptable to a wide range of color schemes and design opportunities.



Cover photo features Impresa Charcoal 12 x 24 on the floor and Light Gray 4 x 12 on the backsplash. Above photo features Impresa Light Gray 12 x 24 on the floor, 4 x 12 on the tub sides and bottom part of wall with 2 x 2 mosaic on the top part of the wall.

# IMPRESA™

GLAZED CERAMIC FLOOR, WALL & MOSAIC  
WITH REVEAL IMAGING®

## GLAZED CERAMIC FLOOR TILE


---



LIGHT GRAY IM08



TAUPE IM09

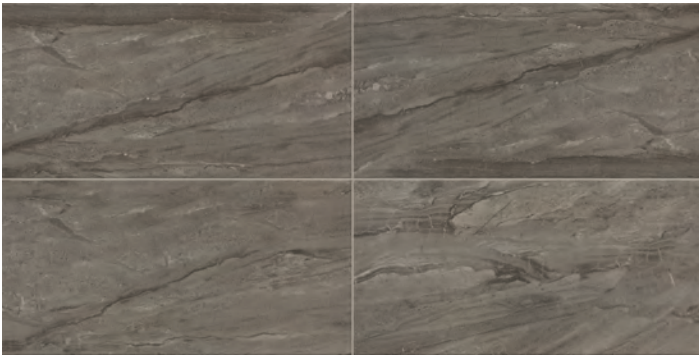

CHARCOAL IM10

## GLAZED CERAMIC WALL TILE


---



LIGHT GRAY IM08




TAUPE IM09

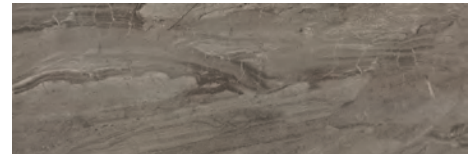


CHARCOAL IM10

## GLAZED CERAMIC MOSAIC


---

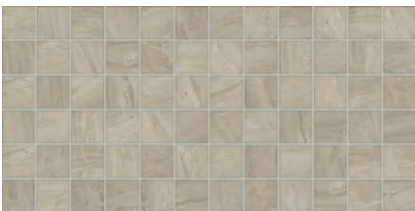

LIGHT GRAY IM08

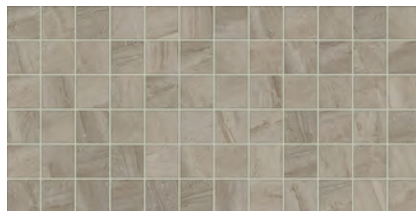

TAUPE IM09

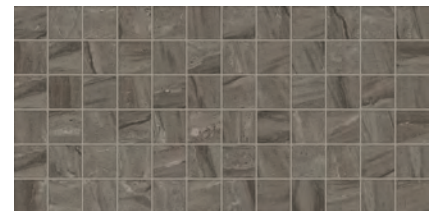

CHARCOAL IM10

## JOLLY TRIM

---



LIGHT GRAY IM08



TAUPE IM09






CHARCOAL IM10

# IMPRESA™

GLAZED CERAMIC FLOOR, WALL & MOSAIC  
WITH REVEAL IMAGING®

## SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	12 x 24 Floor Tile	11-9/16" x 23-3/8" (29.40 cm x 59.30 cm)	3/8"	15.04	8
	4 x 12 Wall Tile	4-1/4" x 12-7/8" (10.91 cm x 32.77 cm)	5/16"	10.64	28
	2 x 2 Mosaic ■	12" x 24" Sheet (30.48 cm x 60.96 cm Sheet)	1/4"	24.00	12

## TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	3 x 12	P-43C9	22
	12" Jolly	1/2 x 12	S1/212J	6 Cards

■ Dot-mounted

## INSTALLATION & PRICING

### RECOMMENDED GROUT JOINT:

**Floor:** 3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern.)  
**Wall:** 1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)  
**Mosaic:** 1/8"

**RELATIVE PRICING:** Low to Medium

### SHADE VARIATION



HIGH  
(V3)

## PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT	WALL RESULT	MOSAIC RESULT
Water Absorption	C373	< 7.0%	< 20.0%	< 3.0%
Breaking Strength	C648	> 250 lbs.	120-230 lbs.	> 250 lbs.
Scratch Hardness	MOHS	7.0	4.0-6.0	7.0
Chemical Resistance	C650	Resistant	Resistant	Resistant
Abrasion Resistance	C1027	3	N/A	3

For additional information on test results, visit us at: [americanolean.com/information/TestResults](http://americanolean.com/information/TestResults).

## USAGE

FLOORS	WALLS	COUNTERTOPS
F	W	C

## APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●*
Wet & Level – Interior Floor	≥ 0.42	●**
Shower Floors (Residential or Light Commercial)	≥ 0.42	●**
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●*
Pool Linings	N/A	●**

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

\* Wall tile not suitable for this application

\*\* Mosaic tile only

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: [americanolean.com/Factors](http://americanolean.com/Factors).

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to [americanolean.com/LargeTiles](http://americanolean.com/LargeTiles) for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values < 0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at [www.tileusa.com](http://www.tileusa.com).



POST-CONSUMER  
RECYCLED MATERIALS



MADE IN THE U.S.A.



PRE-CONSUMER  
RECYCLED MATERIALS



REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2018 AMERICAN OLEAN (06/18)



AMERICAN OLEAN®  
PROVEN IN TILE™