



**White - WHI**  
DECREIWHI311PICG  
3"x12" Picket Pattern Field Tile - Gloss




**White - WHI**  
DECREIWHI311PICM  
3"x12" Picket Pattern Field Tile - Matte



**Ivory - IVO**  
DECREIIVO311PICM  
3"x12" Picket Pattern Field Tile - Matte



**Grey - GRE**  
DECREIGRE311PICM  
3"x12" Picket Pattern Field Tile - Matte

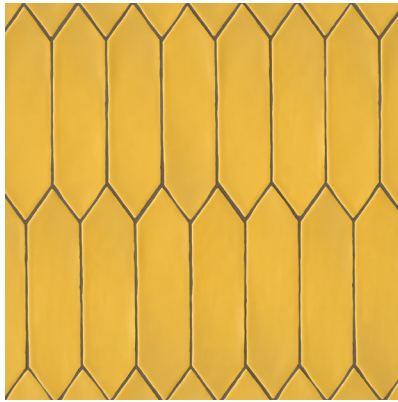

**Golden - GOL**  
DECREIGOL311PICM  
3"x12" Picket Pattern Field Tile - Matte



**Castle Moss Green - CMG**  
DECREICMG311PICM  
3"x12" Picket Pattern Field Tile - Matte



**Gentleman's Grey - GEG**  
DECREIGEG311PICM  
3"x12" Picket Pattern Field Tile - Matte



**Dark Teal - DAT**  
DECREIDAT311PICM  
3"x12" Picket Pattern Field Tile - Matte



**Black - BLA**  
DECREIBLA311PICM  
3"x12" Picket Pattern Field Tile - Matte



**White - WHI**  
DECREIWHIJOLG  
1/2"x8" Jolly - Miter Edge Trim - Gloss



**Available in All Colors**  
DECREI\*\*\*JOLM  
1/2"x8" Jolly - Miter Edge Trim - Matte



# Reine

Decorative (Glazed Ceramic)

Photo Features 3"x12" Picket Pattern Field Tile - Matte in Dark Teal.


## SIZING & PACKAGING

Type	Shape	Item Code	Size	Description	Pcs / Ctn	Sf / Ctn
Field		DECREI***311PICG	3"x12"	Picket Pattern Field Tile - Gloss	32	6.46
		DECREI***311PICM	3"x12"	Picket Pattern Field Tile - Matte	32	6.46
Trim		DECREI***JOLG	1/2"x8"	Jolly - Miter Edge Trim - Gloss	50	-
		DECREI***JOLM	1/2"x8"	Jolly - Miter Edge Trim - Matte	50	-

## ANSI TECHNICAL SPECIFICATIONS

	DCOF Acutest	Scratch Resistance MOHS	Breaking Strength ASTM# C648	Water Absorption ASTM# C373	Chemical Resistance ASTM# C650	Bond Strength A137.2-7.7	Thermal Shock ASTM# C484
Results	N/A	3	ISO ≥ 600 N	>1.0 (Ceramic)	Unaffected	N/A	Pass

Shade Variation



## APPLICATIONS

	Floors	Walls	Countertops	Shower Floors	Shower Walls	Pools/Spas
Residential		●			●	
Light Commercial		●			●	
Commercial		●			●	



## LEGEND

- Product rated for Interior & Exterior use
- Applications & ANSI Technical Specifications do not apply
- Product rated for Interior use only
- \* Special Order only
- † May be suitable for Exterior Floors



This product may be installed near or on the face of interior high-heat areas, but not inside. This product cannot be installed in exterior applications, wet areas, and/or high-heat areas. Do not use chlorine, acids, or other harsh chemicals to clean. Use only non-sanded grout with this product. This product is artisanal and may possess inherent size and color variation.

Merchandising materials and samples are for general reference only and representative of a product's potential characteristics. Tile is subject to variation in color/shade, size, texture, and finish. Field, mosaic and trim tile may not match exactly. Blend tiles from different boxes to achieve consistent shade distribution. Installer and end user must conduct a dry mock layout under proper lighting conditions to inspect the product. Installation constitutes product acceptance. Improper installation, application, use, care and maintenance voids warranty. Reference the TCNA Handbook and ANSI for installation guidance. Please visit bedrosians.com for current product information. We reserve the right to make product changes at any time without notice.

