



FLOOR

BEE HIVE™
COLORBODY™ PORCELAIN

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover photo features Ashgrey 24" hex on the floor.
Above photo features White 24" hex on the floor.

Bee Hive™ is the Shape of Things to Come

From fashion to flooring, geometrics ignite imaginations. Daltile introduces Bee Hive in an eye-catching 24" x 20" format. This sturdy, ColorBody™ porcelain is ready to enliven floors and walls with custom combinations created by mixing neutral hues together – its shape alone can bring new visual interest to monochromatic fields. Six modern colors offer ideal design options.

- A NEW ANGLE ON DESIGN
 - Large-format 24" hexagon shape makes a dynamic statement
 - Mix and match six colors for truly standout designs
- A HIGH LEVEL OF FLEXIBILITY
 - Appeals to traditional and contemporary designs
 - Use on both floors and walls for added visual impact
 - Ideal for creating fresh looks in commercial and residential settings



**PRE-CONSUMER
RECYCLED MATERIALS**


**CERTIFIED
PORCELAIN**

*Professional
TILE-SOLUTIONS*


FIELD TILE



WHITE P006

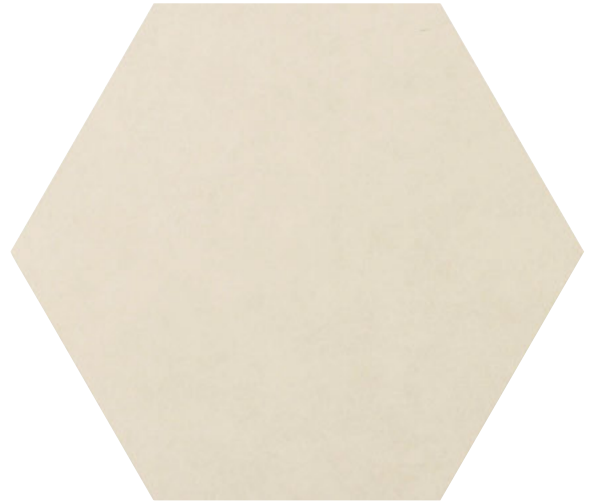


IVORY P007

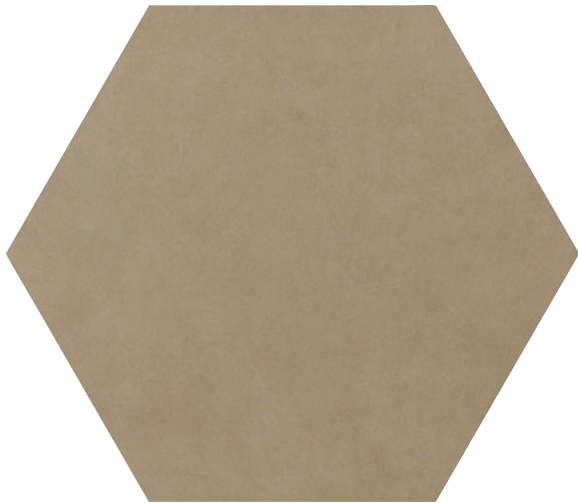

TAUPE P008



ASHGREY P009

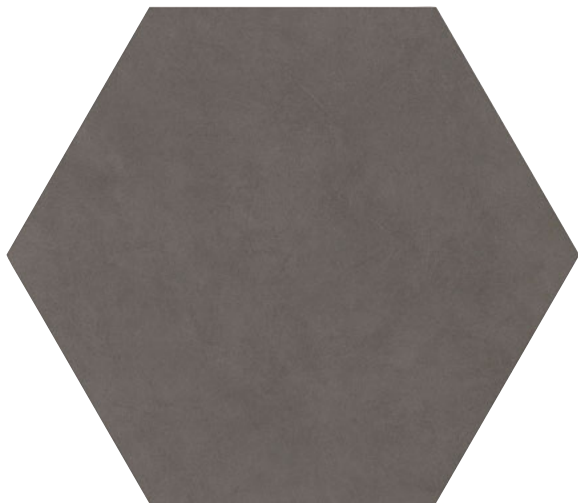

GREY P010




BLACK P011

FLOOR

BEE HIVE™

COLORBODY™ PORCELAIN

SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	24 x 20 Field Tile	(23-5/8" x 20-3/8") (60.00 cm x 51.75 cm)	3/8"	10.12	4

FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓
Exterior Applications, Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	

APPLICATION NOTES:


Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

TRIM

Type	Number	Size	Pieces per Carton
 Bullnose	S-43C9	3 x 12	30

Bullnose trim is intended to coordinate with floor field tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Medium (V2)

TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 300 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

NOTES

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.

SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DAL TILE.COM



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (6/16)