


MOJAVE

TECHNICAL SPECIFICATIONS

STANDARD REQUIREMENTS	TEST RESULTS
WATER ABSORPTION UNI EN ISO 10545-03	< 20% 14 %
BREAKING STRENGTH UNI EN ISO 10545-04	MINIMUM 1110 N >600 N
MODULUS OF RUPTURE UNI EN ISO 10545-04	MINIMUM 30 N/mm ² 12 N/mm ²
THERMAL LINEAR EXPANSION UNI EN ISO 10545-08	AS REPORTED 6,3 · 10 ⁻⁶ /°C
THERMAL SHOCK RESISTANCE UNI EN ISO 10545-09	RESISTANT RESISTANT
MOISTURE EXPANSION UNI EN ISO 10545-10	AS REPORTED 0,3 mm/m
FROST RESISTANCE UNI EN ISO 10545-12	AS REPORTED NOT REQUIRED
CHEMICAL RESISTANCE UNI EN ISO 10545-13	DOMESTIC CHEMICAL PRODUCTS GLA ACID AND ALKALIS GHA
STAIN RESISTANCE UNI EN ISO 10545-14	AS REPORTED 5
SHADE VARIATION	AS REPORTED V1 UNIFORM



Destonificación
Shade variation



HAPPY FLOORS



WWW.HAPPY-FLOORS.COM

GLACIAR

WHITE BODY CERAMIC WALL TILE




GLACIAR

WHITE BODY CERAMIC WALL TILE



SOLID WHITE
12"x36" MATTE
RECTIFIED EDGE

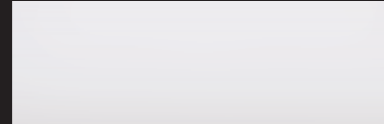


SOLID WHITE
12"x36" GLOSSY
RECTIFIED EDGE




NUDE
12"x36" MATTE
RECTIFIED EDGE




NUDE
12"x36" GLOSSY
RECTIFIED EDGE

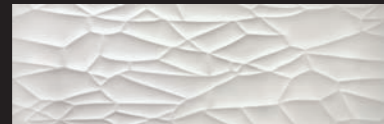

MOJAVE
12"x36" MATTE
RECTIFIED EDGE

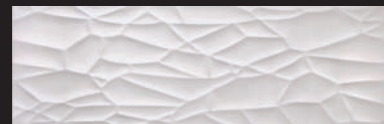

MOJAVE
12"x36" GLOSSY
RECTIFIED EDGE

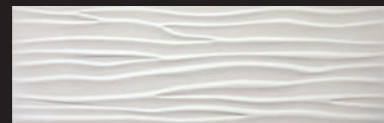

WAVE
12"x36" MATTE
RECTIFIED EDGE



WAVE
12"x36" GLOSSY
RECTIFIED EDGE

GROUT JOINT REQUIRED
FOR RECTIFIED EDGE TILE,
1/2 BROKEN JOINT
NOT RECOMMENDED

