

DARE TO BE BOLD



COSTA CLARA™

GLAZED CERAMIC WALL

MARAZZI 
DARE TO BE BOLD™



COSTA CLARA™



CLOUD & DEEP SEA

COSTA CLARA™ captures the essence of artisanal hand-made tiles with a refined coastal feel. This luminous wall tile with translucent glaze and soft undulations combine for a rich design aesthetic. A lavish sea of colors ranges from light beige to bright blue to deep red. Mix two wall sizes with a coordinating rail liner or jolly trim for a custom effect.

BLUE WAVE



CLOUD AND DEEP SEA



BLUE WAVE



COSTA CLARA™

GLAZED CERAMIC WALL

WALL TILE



CC80 Cloud




CC81 Beach Sand



CC82 Pelican




CC83 Pebble Shore

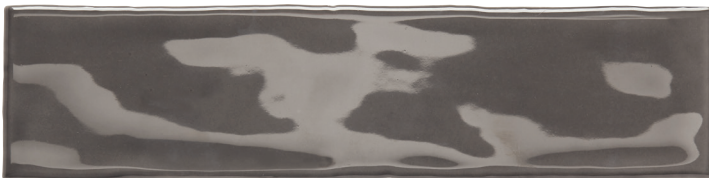

CC85 Ocean Drive




CC84 Sand Dunes

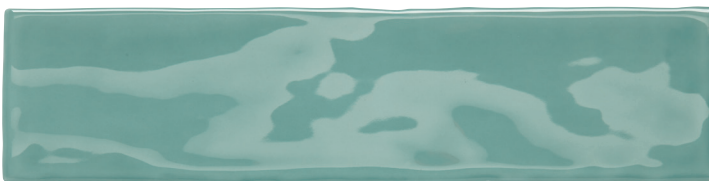

CC86 Caribbean Teal



CC87 Blue Wave

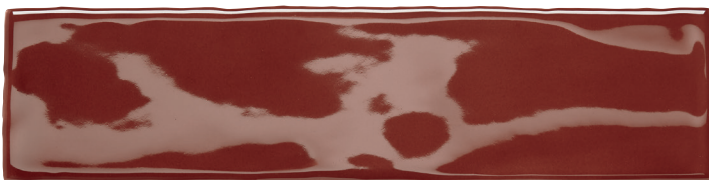

CC88 Sea Star



CC89 Deep Sea



USAGE

Floors	Walls	Countertops
	W	

COSTA CLARA™

GLAZED CERAMIC WALL

SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton	
	3 x 12 Wall Tile	(3" x 11-7/8") (7.60 cm x 30.20 cm)	5/16"	11	44
	6 x 6 Wall Tile	(6" x 6") (15.20 cm x 15.20 cm)	3/8"	9.5	38

APPLICATIONS



	Target DCOF wet	Suitable
Dry & Level - Interior Floor	N/A	
Wet & Level - Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit marazzitile.com/DCOF.


APPLICATION NOTES:

Suitable for exterior applications in non-freezing climates, when proper installation methods are followed.

TRIM

Description	Number	Size	Shape
Rail Liner	16RAIL	1 x 6	
Jolly	SI/28J	1/2 x 8	

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	 Low Variation


PERFORMANCE CHARACTERISTICS

	ASTM#	Wall Result
Water Absorption	C373	< 20%
Breaking Strength	C648	120 - 230 lbs
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1207	N/A

For additional information on test results, visit us at: marazzitile.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

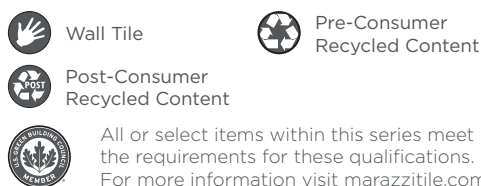

MARAZZI 

DARE TO BE BOLD™

7834 C.F. Hawn Freeway
Dallas, Texas 75217

www.marazzitile.com
contact@marazzitile.com

©2018 Marazzi | 01.18 | MZBRO114 Costa Clara™ Brochure

COVER FEATURES COSTA CLARA™ IN BLUE WAVE

Color and other aesthetic features shown are as close as the limitation of the printing process will allow. We have tried to make this brochure as comprehensive and factual as possible. We reserve the right, however, to make changes at any time, without notice, in colors, materials, packaging, specifications and availability. Since some information may have been updated since time of printing, please check with Marazzi Customer Service for details.