



Test Report: APV-8E-24

8W Single Output Switching Power Supply

■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test

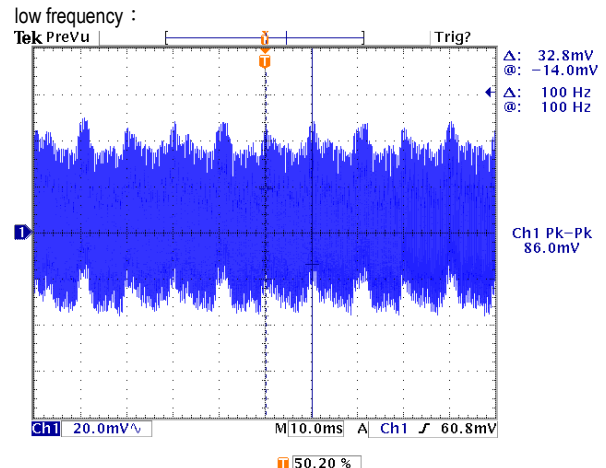
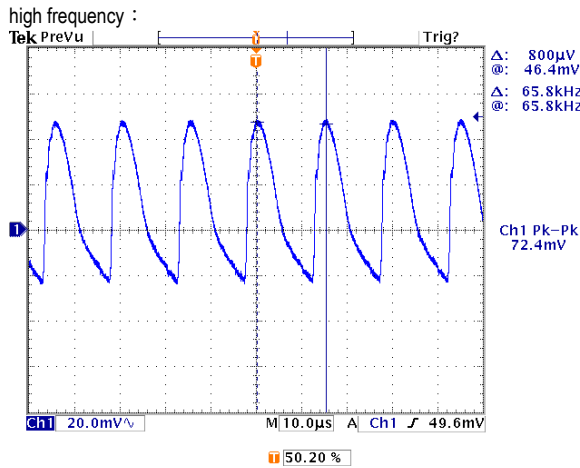
■ RELIABILITY TEST

Environment Test

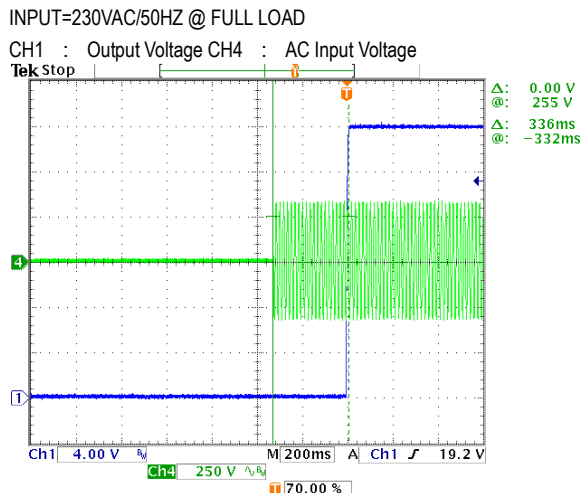
DESIGN VERIFY TEST

OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE(Max) TOLERANCE	V1: -5%~5%	I/P: 180VAC /264VAC O/P: FULL/ NO LOAD Ta: 25°C	V1: -0.13%~0%
2	LINE REGULATION (Max)	V1: -1%~1%	I/P: 190VAC~264VAC O/P: FULL LOAD Ta: 25°C	V1: -0.08%~0%
3	LOAD REGULATION(Max)	V1: -2%~2%	I/P: 230VAC O/P: FULL ~NO LOAD Ta: 25°C	V1: -0.04%~0%
4	OVER/UNDERSHOOT TEST	< ± 5%	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	<5%
5	RIPPLE & NOISE(Max)	V1: 200 mVp-p	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	V1: 86.0mVp-p



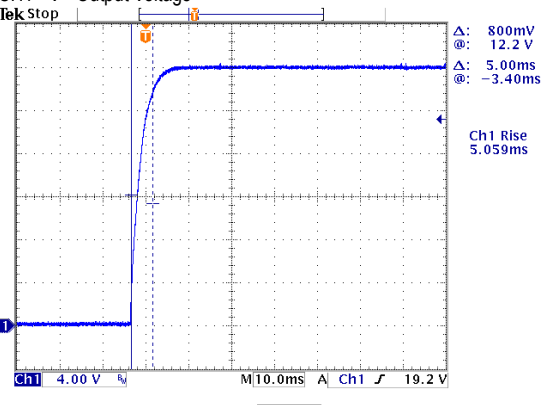
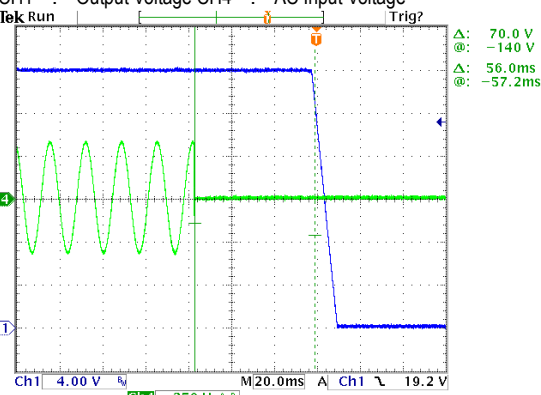
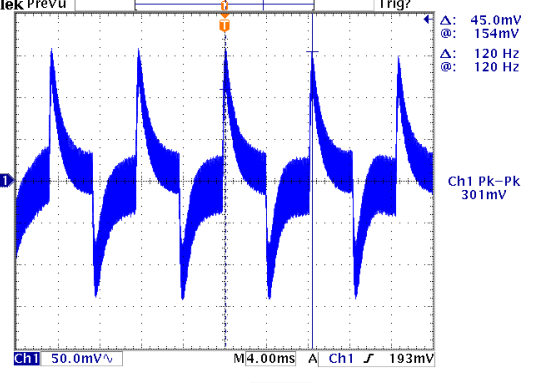
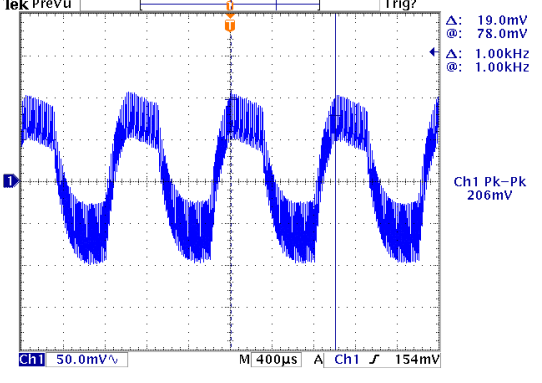
6	SET UP TIME(Max)	230VAC/ 500ms	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 336ms
---	------------------	---------------	--	---------------



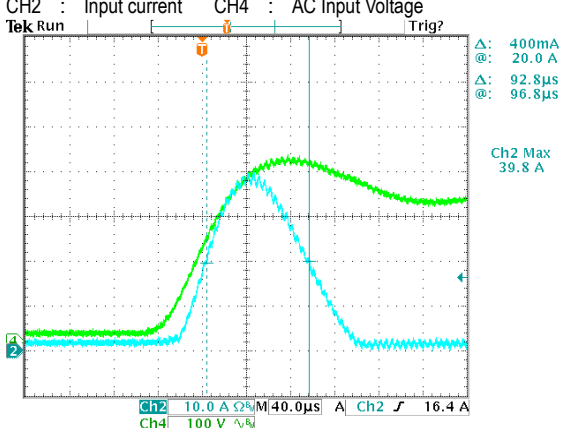


8W Single Output Switching Power Supply

APV-8E series

7	RISE TIME (Max)	230VAC/ 30ms	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 5.059ms
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage</p>  <p>Δ: 800mV @: 12.2 V Δ: 5.00ms @: -3.40ms Ch1 Rise 5.059ms</p> <p>Ch1 4.00 V 10.0ms M 10.0ms A Ch1 19.2 V</p>				
8	HOLD UP TIME(Typ)	230VAC/ 20ms	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	230VAC/ 56.0ms
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH1 : Output Voltage CH4 : AC Input Voltage</p>  <p>Δ: 70.0 V @: -140 V Δ: 56.0ms @: -57.2ms</p> <p>Ch1 4.00 V 20.0ms M 20.0ms A Ch1 19.2 V</p>				
9	DYNAMIC LOAD	V1: 2400 mVp-p	I/P: 230VAC O/P : (1)FULL /50% LOAD 50%DUTY / 120HZ (2)FULL /50% LOAD 50%DUTY / 1KHZ Ta: 25°C	(1) 301mVp-p (2) 206mVp-p
<p>FULL /50% LOAD 50%DUTY / 120HZ</p>  <p>Δ: 45.0mV @: 154mV Δ: 120 Hz @: 120 Hz Ch1 Pk-Pk 301mV</p> <p>Ch1 50.0mV 4.00ms M 4.00ms A Ch1 193mV</p> <p>FULL /50% LOAD 50%DUTY / 1KHZ</p>  <p>Δ: 19.0mV @: 78.0mV Δ: 1.00kHz @: 1.00kHz Ch1 Pk-Pk 206mV</p> <p>Ch1 50.0mV 400µs M 400µs A Ch1 154mV</p>				

INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	180VAC~264VAC	I/P: TESTING O/P: FULL LOAD Ta: 25°C	177V~267V
			I/P: (1)LOW-LINE-3V=177 V HIGH-LINE+15%=300 V O/P: FULL/NO LOAD ON: 30 Sec OFF: 30 Sec 10Min (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20Min (3)230Vac ON: 3Sec OFF: 3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 180 VAC ~264 VAC O/P: FULL~NO LOAD Ta: 25°C	TEST: OK
3	INPUT CURRENT (Typ)	230V/ 0.15A	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I=0.09A/ 230VAC
4	LEAKAGE CURRENT	< 0.25mA / 240 VAC	I/P: 240 VAC O/P: NO LOAD Ta: 25°C	L-FG: 0.0026 mA N-FG: 0.0026 mA
5	INRUSH CURRENT(Typ)	230V/ 70A Twidth =120 us measured at 50% Ipeak COLD START	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	I = 39.8 A/ 230VAC Twidth =92.8 us
<p>INPUT=230VAC/50HZ @ FULL LOAD</p> <p>CH2 : Input current CH4 : AC Input Voltage</p>  <p> Δ: 400mA \circ: 20.0 A Δ: 92.8μs \circ: 96.8μs Ch2 Max 39.8 A </p> <p> Tek Run Trig? </p> <p> ch2 10.0 A 2% 40.0μs A ch2 16.4 A Ch4 100 V 4.8μs </p> <p>40.00%</p>				
6	NO LOAD POWER CONSUMPTION	< 0.5W	I/P: 230VAC O/P: NO LOAD Ta: 25°C	0.073W
7	EFFICIENCY(Typ)	78.5%	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	79.21%
8	POWER FACTOR	>0.5/ 230VAC	I/P: 230 VAC O/P: FULL LOAD Ta: 25°C	PF= 0.5452 / 230VAC

PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	Above 105%	I/P: 230VAC O/P: TESTING Ta: 25°C	156.77%/ 230VAC Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	V1: 27.6 V~ 32.4 V	I/P: 230VAC O/P: NO LOAD Ta: 25°C	31.22V/ 230VAC Shut off o/p voltage, clamping by zener diode
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode, recovers automatically after fault condition is removed

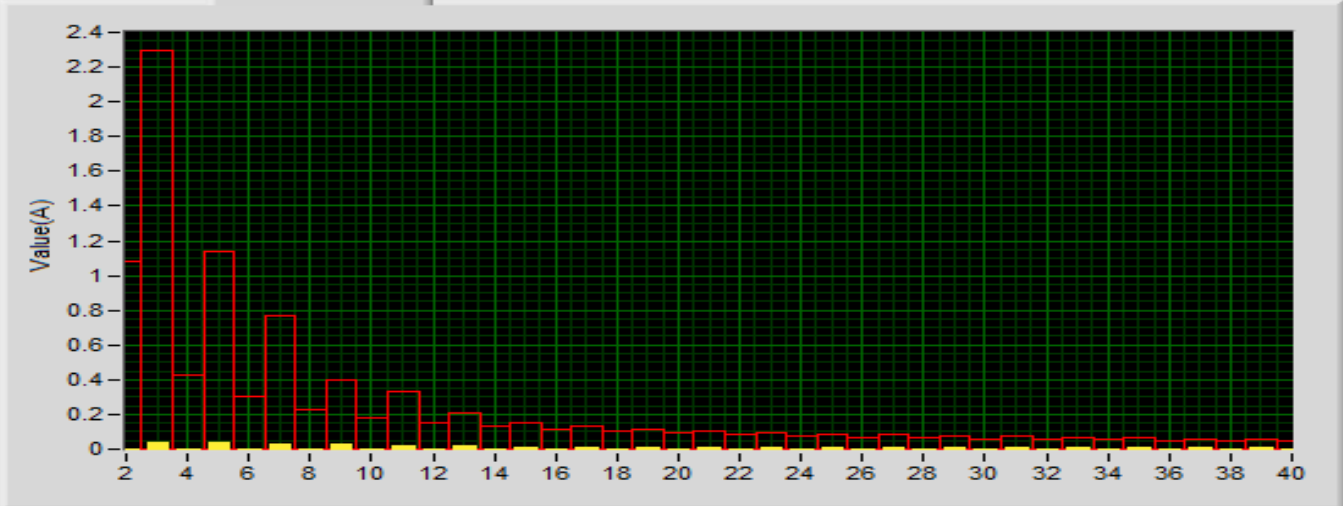
COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	U1 Rated 650V/2.5A	I/P: High-Line +3V =267V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 538V (2) 496V (3) 482V
2	Diode Peak Voltage	D100 Rated 200V/2A	I/P: High-Line +3V =267V O/P: (1) Full Load Turn on (2) Output Short (3) Full load continue Ta: 25°C	(1) 159V (2) 138V (3) 133V
3	Input Capacitor Voltage	C5 Rated 10u/ 400V	I/P: High-Line +3V =267 V O/P: (1) Full Load input on/off (2) NO load input on /Off (3) Full Load /NO load Change Ta: 25°C	(1) 398V (2) 365V (3) 398V
4	Control IC Voltage Test	U1 Rated 28V	I/P: High-Line +3V =267 V O/P: (1) Full Load input on/off (2) NO load input on /Off (3) Full Load /NO load Change Ta: 25°C	(1) 17.9V (2) 16.8V (3) 17.9V

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 3.75 KVAC/min	I/P-O/P: 4.2 KVAC/min Ta: 25°C	I/P-O/P: 1.371mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 500 VDC Ta: 25°C	I/P-O/P: >9999MΩ NO DAMAGE

E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	PASS
				
2	CONDUCTION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	EN55015	I/P: 230 VAC (50HZ) O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 LIGHT INDUSTRY AIR: 8KV / Contact: 4KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 LIGHT INDUSTRY INPUT: 1KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	EN61000-4-5 INDUSTRY L-N : 2KV	I/P: 230 VAC/50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

■ RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																												
1	TEMPERATURE RISE TEST	MODEL: APV-8E-24 1. ROOM AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 22.6 °C 2. HIGH AMBIENT BURN-IN: 2 HRS I/P: 230VAC O/P: FULL LOAD Ta= 43.8 °C <table border="1" style="margin-left: 40px;"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta= 22.6 °C</th> <th>HIGH AMBIENT Ta=43.8 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>L1</td><td>46.9°C</td><td>67.0°C</td></tr> <tr><td>2</td><td>U1</td><td>86.9°C</td><td>105.8°C</td></tr> <tr><td>3</td><td>C5</td><td>65.3°C</td><td>84.7°C</td></tr> <tr><td>4</td><td>C9</td><td>54.6°C</td><td>75.1°C</td></tr> <tr><td>5</td><td>D1</td><td>79.9°C</td><td>99.3°C</td></tr> <tr><td>6</td><td>T1</td><td>73.5°C</td><td>93.0°C</td></tr> <tr><td>7</td><td>C103</td><td>51.0°C</td><td>70.8°C</td></tr> <tr><td>8</td><td>C104</td><td>60.2°C</td><td>79.9°C</td></tr> <tr><td>9</td><td>D100</td><td>68.1°C</td><td>87.3°C</td></tr> <tr><td>10</td><td>TC</td><td>58.7°C</td><td>77.5°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta= 22.6 °C	HIGH AMBIENT Ta=43.8 °C	1	L1	46.9°C	67.0°C	2	U1	86.9°C	105.8°C	3	C5	65.3°C	84.7°C	4	C9	54.6°C	75.1°C	5	D1	79.9°C	99.3°C	6	T1	73.5°C	93.0°C	7	C103	51.0°C	70.8°C	8	C104	60.2°C	79.9°C	9	D100	68.1°C	87.3°C	10	TC	58.7°C	77.5°C		
NO	Position	ROOM AMBIENT Ta= 22.6 °C	HIGH AMBIENT Ta=43.8 °C																																													
1	L1	46.9°C	67.0°C																																													
2	U1	86.9°C	105.8°C																																													
3	C5	65.3°C	84.7°C																																													
4	C9	54.6°C	75.1°C																																													
5	D1	79.9°C	99.3°C																																													
6	T1	73.5°C	93.0°C																																													
7	C103	51.0°C	70.8°C																																													
8	C104	60.2°C	79.9°C																																													
9	D100	68.1°C	87.3°C																																													
10	TC	58.7°C	77.5°C																																													
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (Min)	I/P: 230 VAC O/P: 110 %LOAD Ta: 25°C	TEST: OK																																												
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P: 264VAC/190VAC O/P: 100 %LOAD Ta= -35°C	TEST: OK																																												
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 45°C NO DAMAGE	I/P: 272 VAC O/P: FULL LOAD Ta= 45°C HUMIDITY= 95 %R.H	TEST: OK																																												
5	TEMPERATURE COEFFICIENT	±0.03 %/°C (0~45°C)	I/P: 230 VAC O/P: FULL LOAD	±0.008 %/°C (0~45°C)																																												
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45°C ~ +90°C 2. Temperature change rate : 25°C / Min 3. Dwell time low and high temperature : 30 Min/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: STATIC		TEST: OK																																												
7	THERMAL SHOCK TEST	1. Thermal shock Temperature: -35°C ~ +50°C 2. Temperature change rate : 25°C / Min 3. Dwell time low and high temperature : 30 Min/EACH 4. Total test cycle: 10 CYCLE 5. Input/Output condition: 230VAC/Full Load AC ON/OFF TEST turn on 58 sec; turn off 2 sec		TEST: OK																																												



8W Single Output Switching Power Supply

APV-8E series

8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (3) Sweep Time: 10 Min/sweep cycle (4) Acceleration: 2G (5) Test Time: 60 Min in each axis (X.Y.Z) (6) Ta: 25°C	TEST: OK
9	CAPACITOR LIFE CYCLE	APV-8-24: SUPPOSE C104 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P: FULL LOAD Ta= 25 °C LIFE TIME (2) I/P: 230VAC O/P: FULL LOAD Ta= 45 °C LIFE TIME (3) I/P: 230VAC O/P: 75% LOAD Ta= 45 °C LIFE TIME (4) I/P: 230VAC O/P: 50% LOAD Ta= 45 °C LIFE TIME	(1) 138234 HRS (2) 38325 HRS (3) 73578 HRS (4) 106930 HRS
10	MTBF	MIL-HDBK-217F TOTAL FAILURE RATE: 1631.5K HRS	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 20,000 hours @ Tc 75°C	

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	ZHANGZJ/ZHUOKB	SKY	LIUWY