



www.xgcargo.com

Tactical Seat Back Organizer XG-801


USER MANUAL

Fits Jeep, Ford, GM, Toyota, Nissan





Patent Number: US11498490B1

PARTS LIST:


1 Mounting Panel

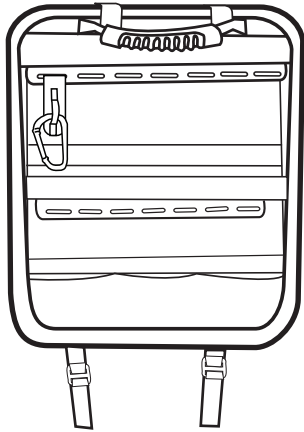

4 Rail station Bags &
1 Utility Clip w/Carabiner



SCAN FOR INSTRUCTIONAL VIDEO:



Scan the QR code with your smartphone and it will take you to the link below:

<https://qrgo.page.link/yYQYH>

INSTALLATION TIME & SKILL LEVEL:



5-10 minutes, Skill Level 01

WARNING!

Be sure all hardware is secured according to instructions. Attachment hardware can loosen over time. Check before each use, and tighten if necessary.

Do not exceed the maximum load specified for each cargo bag, accessory or the maximum load recommended by the vehicle manufacturer.

Do not load more than 2lbs in each bag.

MAINTENANCE

The cargo storage components should be carefully cleaned and maintained.. Use only a solution of water and soap without any alcohol, bleach or ammonium additives. Periodically inspect cargo storage components for damage. Replace lost, damaged or worn parts. Use only original spare parts obtained from a stocking specialist, dealer or manufacturer. Any changes made to the cargo storage system and components as well as the use of spare parts or accessories other than those supplied by the manufacturer will lead to the lapsing of the manufacturer's warranty and liability for any material damage or accidents. You should observe these instructions to the letter and only use the original parts supplied.

STEP 01:

Remove all components from box and be sure all components including fasteners are intact. Remove bags from mounting panel by (1) pulling bottom of each bag away from Velcro strip. Once separated, lift bag up to release bag from rail track (2)

Note: After removing and re-installing a few times, the process will become easier.

STEP 02:




Attach mounting panel headrest clips to both headrest posts as shown.

STEP 03:

Locate a crossbar or connection point under seat that **DOES NOT** interfere with, or come in contact with any electrical control cables, wires or mechanical controls and does not hinder the movement of the seat. Attach elastic straps A to designated connection point under seat. Tighten slightly but do not over-tighten. Only tighten enough to hold panel against seat back.




STEP 02

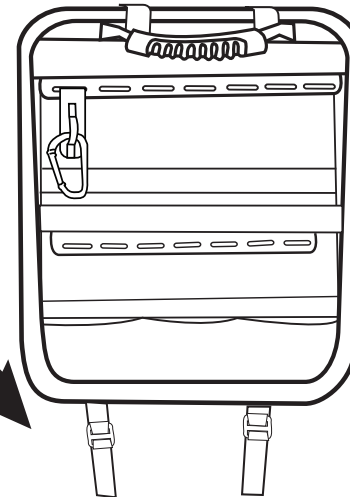

Due to the many under-seat configurations, it is the end-user's responsibility to determine which connection is best.

ASSEMBLED

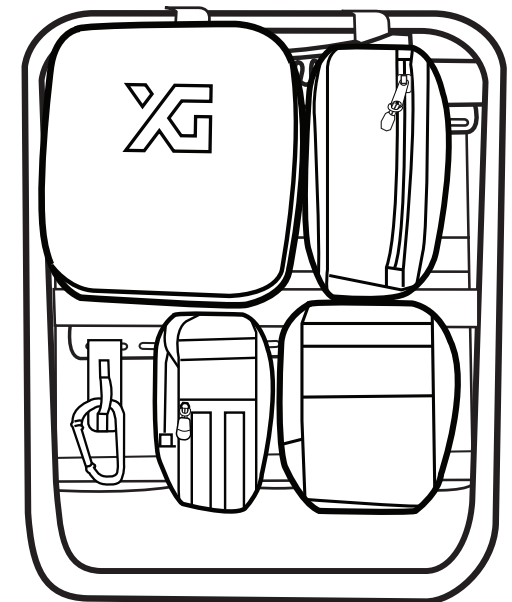

Warning! Do not use excessive force to remove bags. This product is designed to prevent bags from becoming loose in rough conditions, therefore, please follow directions for removal.