




## OptConnect's first 5G dual-carrier router on the CAT M1 Network



### OptConnect mylo

Tenacious Connectivity, Magnetic Personality

| Features  | Advantages   |
|---|--|
| <ul style="list-style-type: none"> <li>• <b>Plug-n-play</b> Connectivity</li> <li>• <b>Lightweight</b> 2.8 oz</li> <li>• <b>Compact size</b> 79.8 x 79.8 x 19.7 mm</li> <li>• <b>Temp resistance</b> -40c - +85</li> <li>• Magnetic Base</li> </ul>   | <ul style="list-style-type: none"> <li>• Dual carrier redundancy  </li> <li>• Better building penetration</li> <li>• Primary network connectivity for POS, ATMs, etc.</li> <li>• Flexible and practical</li> <li>• Modular antenna</li> <li>• Flexible mounting options with integral magnetic base</li> <li>• Delivers speed and wide coverage (Cellular Technology 5G)</li> <li>• 5v power</li> <li>• Enables remote device connectivity</li> <li>• Save money, time and improve business efficiency</li> <li>• Always on</li> <li>• Low power consumption 5G 10-15 watts peak</li> <li>• Built-in Firewall – 2.2</li> <li>• DHCP server for local automatic IP assignment – can assign static IPs                             <ul style="list-style-type: none"> <li>Public and Private IP modes for local IP assignment</li> <li>NAT with VPN Passthru</li> <li>Domain name addressable</li> </ul> </li> </ul> |
| Additional Features   |  |
| <ul style="list-style-type: none"> <li>• Cost-effective replacement for landline dial-up circuits or analog cell-phones – Primary connectivity for PLCs, RTUs, POS, ATM solutions</li> <li>• Speed optimized for transactional / sensor data transmission</li> <li>• Full duplex transceiver ethernet port</li> <li>• LED network status indicators</li> <li>• Remotely manageable and upgradeable</li> </ul> |  |

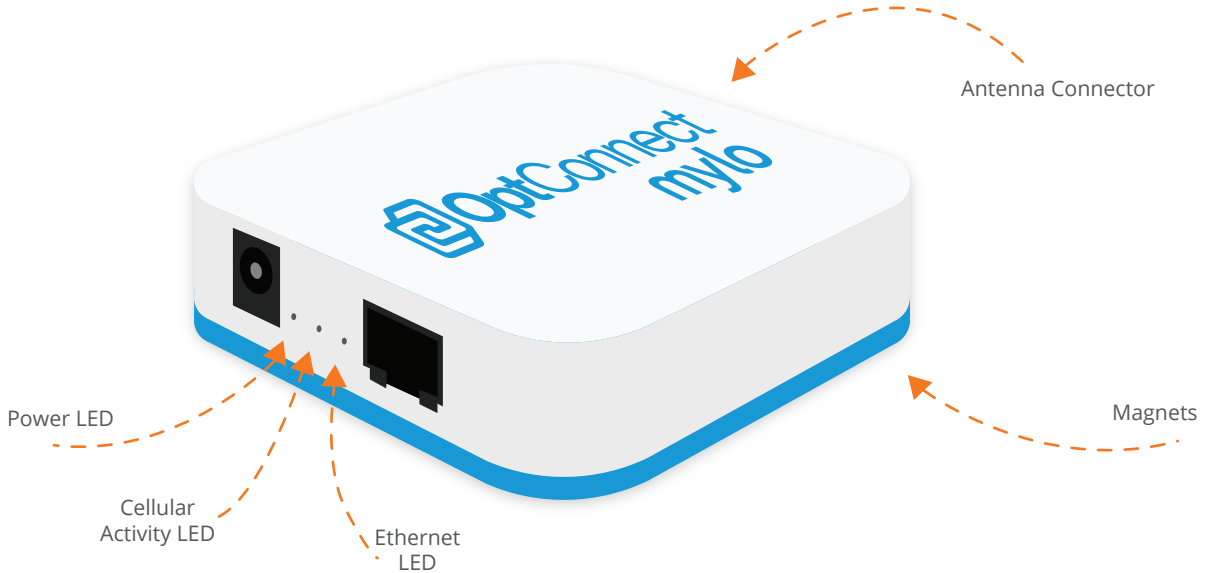

| Wireless WAN           |  |
|------------------------|--|
| GSM                    | 2G fallback  |
| LTE                    | LTE-FDD: B1[2100], B2[1900], B3[1800], B4[1700], B5[850], B8[900], B12[700], B13[700], B18[850], B19[850], B20[800], B26[850], B28[700], LTE-TDD: B39[1900] (LTE-M only) |
| WWAN Embedded Module   | Quectel-QBG96  |
| SIM Slots              | 2 internal 3FF Micro-SIM Slot  |
| Antenna Connectors     | 1 x 50 Ω SMA (Center pin: female)  |
| Ethernet               |  |
| Ports                  | 1  |
| Connector              | RJ-45  |
| Standard               | IEEE 802.3   |
| Physical Layer         | 10/100 Base-T  |
| Data Rate              | 10/100 MBit/s  |
| Mode                   | Full or Half duplex  |
| Interface              | Auto MDI/MDIX  |
| Management             |  |
| Fully Managed Service  | Logistics, fulfillment, 24x7 support, APIs, OptConnect Summit  |
| Processor and Memory   | Logistics, fulfillment, 24x7 support, APIs, OptConnect Summit  |
| Protocol Support       | HTTP, HTTPS, FTP, SSL  |
| Power                  |  |
| Input                  | 5 VDC (power supply with barrel connector included)  |
| Consumption            | Typical: 3.5 W; Max: 15 W  |
| General                |  |
| LEDs                   | Power On, LAN Connection, WWAN Service   |
| Relative Humidity      | 5% to 95% (non-condensing)   |
| Approvals              |  |
| GSM/CDMA               | Verizon ODI, PTCRB   |
| Carrier Certifications | Verizon, AT&T, others  |

**Need more information?**

Call our sales team at 1-877-678-3343