

TYPE:	MODEL:	
PROJECT:	L	
	ئ <u>ــــــــــــــــــــــــــــــــــــ</u>	

PRODUCT FEATURES





ORDERING INFORMATION

EXAMPLE: CTS-600-DT-C

SERIES	MODEL	ACCESSORIES	FINISH	
CTS				

SERIES	MODEL	ACCESSORIES	FINISH	ORDERING NOTES
	300 300 Watts	T Removable multi-setting	C Clear	* DA timer only available wit
	600 600 Watts (300 W x 2)	mechanical 24-hour timer	B Black	300W & 600W Models
	900 900 Watts (300 W × 3)	DT Removable multi-setting	Z Architectural Bronze	Accessories not required for
	1200 1200 Watts (300 W × 4)	digital 7-day timer	DZ Dark Bronze	operation of transformer
	digital astronomical timer *	GT Granite		
		W White		
		RP Remote wired photocell with electronic timer	BR Architectural Brick	
		electronic timer	LZ Light Bronze	
			SB Special Bronze	
			GG Glossy Gray	
			R Rust	
			HG Hunter Green	
			WB Weathered Bronze	
		WI Weathered Iron		
			GM Graphite Metallic	
			G Verde	
			P Pewter	
			M Mocha	
			OF Olde Finish	



www.VistaPro.com · email@vistapro.com · Fax: (888) 670-VISTA (8478) 1625 Surveyor Avenue · Simi Valley, CA 93063 · (805) 527-0987 · (800) 766-VISTA (8478)



SPECIFICATIONS

HOUSING CONSTRUCTION:

20-gauge 304 stainless steel.

 $\frac{1}{2}^{"}-\frac{3}{4}^{"}$ knockouts on each side of enclosure for conduit and accessory mounting as well as a removable, swing-down enclosure bottom with Adjustable Cable Raceway Feeder and multiple $\frac{1}{2}^{"}-\frac{3}{4}^{"}$ and $2^{"}$ knockouts.

NEMA ENCLOSURE RATING:

3R

FINISH:

Clear powder coat finish standard. Also available in Black, Architectural Bronze, Dark Bronze, Granite, White, Architectural Brick, Light Bronze, Special Bronze, Glossy Gray, Rust, Hunter Green, Weathered Bronze, Weathered Iron, Graphite Metallic, Verde, Pewter, Mocha and Olde Finish.

TERMINALS:

• Low voltage terminal strip for multiple cable connections

• 120-volt terminal strip for easy hard-wiring and an accessory terminal strip.

AVAILABLE POWER RATING:

300, 600, 900 or 1200 Watts

PRIMARY VOLTAGE:

120 Volts (Also available in 208V, 230V or 277V, 50 or 60 cycle - Special order only.)

SECONDARY VOLTAGE:

12 Volts (with High/Low setting)

PRIMARY PROTECTION:

Auto thermal shut-off

SECONDARY PROTECTION:

Resettable high performance magnetic circuit breaker. Fully grounded and isolated with encapsulated core and coil.

WIRING:


6-foot, heavy-gauge, grounded, water-resistant power cord with integrally molded plug.

CERTIFICATION:

UL Listed to U.S. and Canadian safety standards for low voltage landscape luminaires (UL 1838).

Pool & Spa Ready - Suitable for Use with Submersible Luminaires or Submersible Pumps (power cord must be shortened to a 3-foot maximum length - see Installation Instructions).

DIMENSIONS

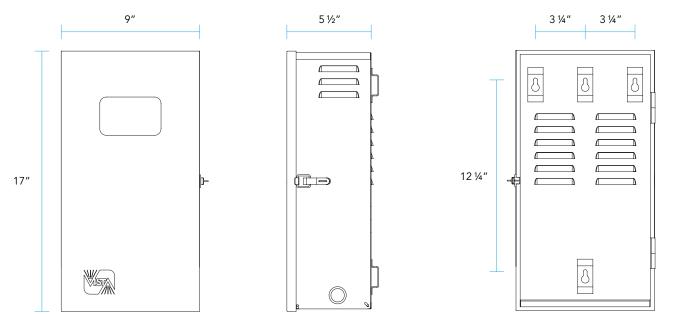



PROFESSIONAL

OUTDOOR LIGHTING

www.VistaPro.com · email@vistapro.com · Fax: (888) 670-VISTA (8478) 1625 Surveyor Avenue · Simi Valley, CA 93063 · (805) 527-0987 · (800) 766-VISTA (8478)