

MATIN TABLE LAMP

PRODUCT FACT SHEET



HAY

MATIN TABLE LAMP


DESIGN BY INGA SEMPÉ, 2018

The Matin table lamp offers a contemporary yet poetic design, with a construction that combines visual delicacy with physical robustness. It consists of a steel wire bent frame finished in polished brass with matte black hardware and is paired with a pleated cotton shade in a variety of vibrant colours. The light source is an integrated LED, offering a diffused downlight which is accompanied by a digital in-line dimmer control to adjust the output of light if required.


HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection.
- A family of contemporary table, ceiling and wall lamps.
- Elegant table lamp with a steel wire bent frame, paired with a pleated cotton shade in different colours.
- CE approved.
- Integrated LED light source ensuring a life span of at least 25,000 hours of use.
- In-line step dimmer.
- Available in two sizes and suitable for both private and office environments.

DIMENSIONS

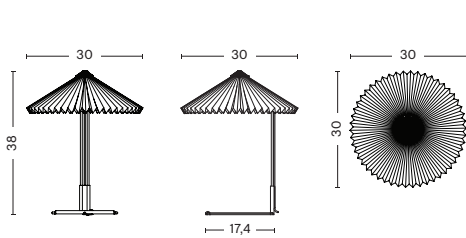

MATIN TABLE LAMP 300
WIDTH 30 CM | 11.81"
DEPTH 30 CM | 11.81"
HEIGHT 38 CM | 14.96"

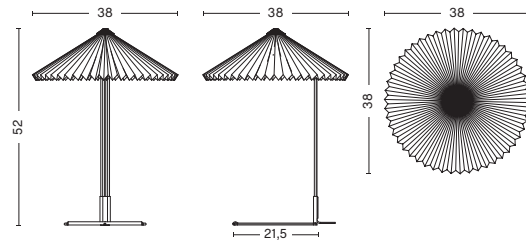

MATIN TABLE LAMP 380
WIDTH 38 CM | 14.96"
DEPTH 38 CM | 14.96"
HEIGHT 52 CM | 20.47"

MATERIALS

SHADE

Cotton fabric laminated to a PVC sheet. Black top screw in injection moulded ABS.

BODY

Bent steel wire with polished brass finish, precision cast steel counter weight and injection moulded ABS.

CORD

Black silicone cable.

INLINE SWITCH

Injection moulded ABS.

COLOUR & FINISH

Please note that the colour codes are indicative.



WHITE
RAL 9010



LAVENDER
PANTONE 7445C



YELLOW
PANTONE 109U



OXIDE RED
PANTONE 7609C



BRIGHT RED
PANTONE 2035U



GREEN
PANTONE 7729U

TECHNICAL SPECIFICATIONS


LIGHT SOURCE Integrated LED, 5W, 150lm, 2800K warm white	DIMMABLE Yes	POWER SUPPLY 220-240V AC at 50/60Hz	IP 20	CORD LENGTH 200 cm	SWITCH Inline step dimmer. Located 50 cm from lamp base.
---	-----------------	--	----------	-----------------------	--

TEST SPECIFICATIONS*

FLUX (LUMENS) 150lm	CCT (KELVIN) 2800K, warm white	CRI (1-100) 85
------------------------	-----------------------------------	-------------------

*Photometrics and the specification shown is taken using the integrated LED bulb fitted in the production luminaire.

PHOTOMETRICS

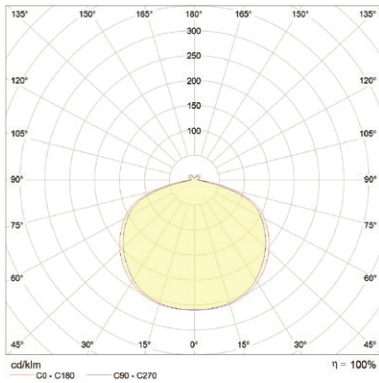

CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.

LED CE IP20 UK CA

Tested according to the following european EN / IEC standards which relate specifically to electrical lighting products including

- EN 55015:2013 (radio disturbance)
- EN 61547:2009 (EMC immunity)
- EN 61000-3-2:2014 (EMC compatibility)
- EN 61000-3-3:2013 (EMC compatibility)
- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)
- EN 62493:2010 (human exposure to EMC)

COUNTRY OF ORIGIN

China

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Image Bank at hay.com.

[LINK TO IMAGE BANK](#)