


AMAX LEVEL-3 (BLUE) PROCEDURAL FACE MASK SPECIFICATION

Product Code: AMSCL3B

LOT#:

Description: 6.9" x 3.75" (Level 3 Mask Blue with Aluminum Wire and Ear-Loops)

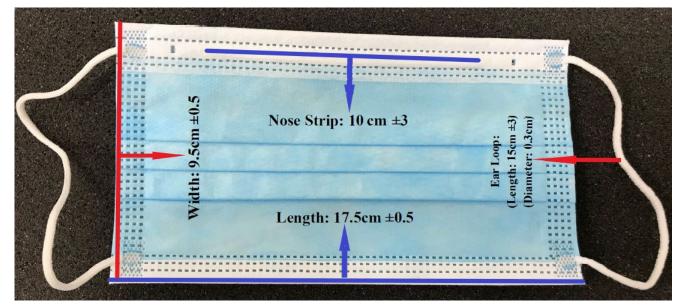

	Body Size		Inner Layer	Middle Layer	Outer Layer	Nose Strip	Ear Loop
Item No.	Length	Width	Spun-bond	Melt-blown	Spun-bond	Aluminum	Elastic Polyester
	-		non-woven fabric	non-woven fabric	non-woven fabric	Wire	and Spandex
AMSCL3B	17.5cm	9.5cm	Grade SSS White	High Filtration White	Grade SSS Blue	10cm ±3	Length: 15cm ±3
	±0.5	±0.5	25 gsm	20 gsm	25 gsm		Diameter: 0.3cm

QC Use Only

Medical Confidentia

Average face mask ear loop tensile strength must be 10N minimum.

Label Issuance and Reconciliation									
Label Type	Quantity	Date of Issue	Quantity Remaining	Disposal					

Operator and Packers Use Only

Line set-up and clearance sign off: Date:

Packer sign off on line clearance: _____Date:____

Information check for Inner and Outer labels (Packer Sign off)

I have read the label and all information pertaining to this product is correct.

Production Summary Production Start Date: Production Finish Date: Total Pallets: Total Cases: Total Units:_____

Inspection Components:

- Check Mask quality of 3 random mask samples every 15 minutes.
- Visually inspect fabrics ultrasonic welds with no loose end.
- · Ensure mask ends are neatly trimmed and Ear Loops are firmly attached.

Signature: _____Date: _____

Approved by (QC):_____Date: ___