


TEST REPORT

(Electronic version)

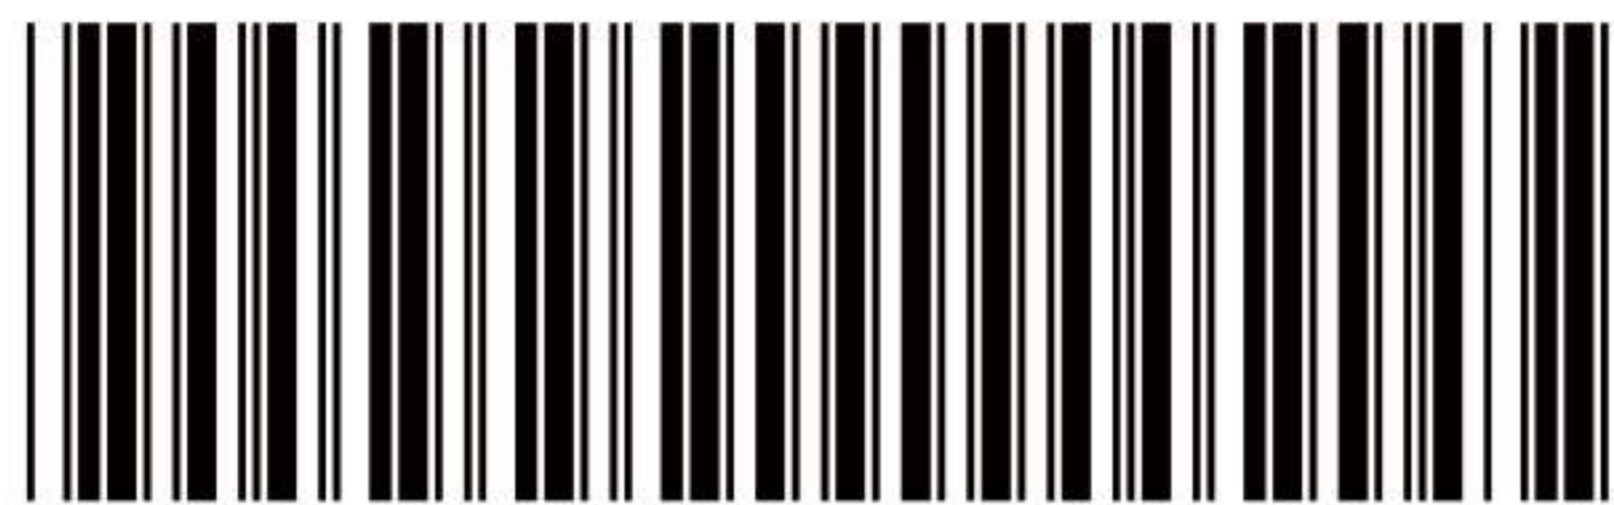

No: 200088201

VERIFICATION WEBSITE: www.gtgc.net.cn

VERIFICATION CODE: VNOF-3535-54

ISSUE DATE: 2020-05-08

扫码下载报告



APPLICANT: MSAFE GLOBAL TRADING LIMITED
ADDRESS: ROOM 750, 7TH FLOOR, BRICS BUILDING, NO. 333 LUJIAZUI RING ROAD, PUDONG NEW DISTRICT, SHANGHAI, CHINA, 201200

INFORMATION CONFIRMED BY APPLICANT:

KN95 RESPIRATOR

QUANTITY: THIRTY-FIVE PIECES

BRAND: MSafe

DATE RECEIVED/DATE TEST STARTED: 2020-04-20

CONCLUSION:

VISUAL FIELD

M

FILTRATION EFFICIENCY TO NaCl PARTICULATE MATTER

M

INSPIRATORY RESISTANCE

M

EXPIRATORY RESISTANCE

M

FLAMMABILITY

M

HEAD BAND

M

NOTE: "M" -MEET THE STANDARD'S REQUIREMENT "F" -FAIL TO MEET THE STANDARD'S REQUIREMENT
"---" -NO COMMENT

REMARK:

THIS REPORT IS THE ENGLISH TRANSLATION VERSION OF THE REPORT 200088200.

ALL THE TESTED ITEMS ARE TESTED UNDER THE STANDARD CONDITION (EXCEPT FOR INDICATION).

COPIES OF THE REPORT ARE VALID ONLY RE-STAMPED.

THE EXPERIMENT WAS CARRIED OUT AT No. 1, ZHUJIANG ROAD, PANYU DISTRICT, GUANGZHOU, GUANGDONG, P. R. CHINA.

APPROVED BY:

ZiShan Guo SENIOR ENGINEER

郭子山



PAGE 1 OF 4

TEST REPORT

(Electronic version)

No:200088201



TEST REPORT

(Electronic version)

No:200088201

VISUAL FIELD(°)

(GB 2890-2009 6.8)

65

REQUIREMENT

≥60

(GB 2626-2006)

FILTRATION EFFICIENCY TO NaCl PARTICULATE MATTER(%)

(GB 2626-2006 6.3, AIR FLOW:85L/min, AEROSOL:NaCl, AEROSOL CONCENTRATION, 15mg/m³, TEMP:22.1°C RH:36.7%)

FILTRATION EFFICIENCY:

UNTREATED SAMPLE

1# 98.74
2# 98.61
3# 98.75
4# 98.79
5# 98.92
6# 98.51
7# 98.42
8# 98.37
9# 98.71
10# 98.60

CONDITIONING TREATED

1# 98.06
2# 97.56
3# 98.56
4# 98.12
5# 98.01

REQUIREMENT

FILTRATION EFFICIENCY:

≥95.0

(KN95)

(GB 2626-2006)

INSPIRATORY RESISTANCE(Pa)

(GB 2626-2006 6.5, HEAD SIZE: MEDIUM)

UNTREATED SAMPLE:

1# 117.8
2# 114.5

PRETREATMENT SAMPLE:

1# 109.4
2# 112.7

REQUIREMENT

≤350

(GB 2626-2006)

EXPIRATORY RESISTANCE(Pa)

(GB 2626-2006 6.6, HEAD SIZE: MEDIUM)

UNTREATED SAMPLE:

1# 104.2
2# 98.5

PRETREATMENT SAMPLE:

1# 99.1
2# 96.5

REQUIREMENT

≤250

(GB 2626-2006)



PAGE 3 OF 4

TEST REPORT

(Electronic version)

No:200088201

FLAMMABILITY(s)

(GB 2626-2006 6.15)

AFTERFLAME TIME
UNTREATED SAMPLE
1# 0.0
2# 0.0
CONDITIONING TREATED
3# 0.0
4# 0.0

REQUIREMENT
AFTERFLAME TIME
≤5
(GB 2626-2006)

HEAD BAND

(GB 2626-2006 6.11)

UNTREATED SAMPLE:
1# PASS
CONDITIONING TREATED:
1# PASS

REQUIREMENT
EACH HEAD BAND, BUCKLE AND OTHER ADJUST
PARTS OF MASK SHOULD NOT SLIP OR BREAK
UNDER 10N TENSION FOR 10S.
(GB 2626-2006)



————End of Report————

PAGE 4 OF 4