

RESPONSIVE 

IMPACT

A BETTER FLOOR

Artisan Edge
SPC FLOORING



UNILIN™ CLICK SYSTEM | ROLLED BEVEL

Artisan Edge

• WATERPROOF • SCUFF & SCRATCH RESISTANT • FADE RESISTANT • STAIN RESISTANT



SIZE: 7" x 60"

THICKNESS: 6.50 MM

WEAR LAYER: 22 MIL | 0.55 MM


TEXTURE: BP EMBOSS

EDGE FINISH: ROLLED BEVEL

PIECES: 8 PER CARTON

COVERAGE: 23.62 SQ FT / 2.19 M² / CARTON

INTERLOCK: UNILIN™ CLICK SYSTEM

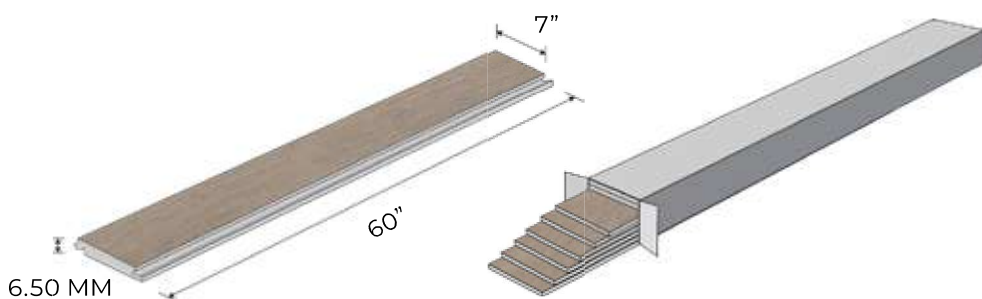

6.50 MM


7" x 60" x 6.5 MM

180 mm X 1524 mm x 6.5 MM

8 PCS/CARTON

23.62 SQ.FT/CARTON

51.28 LBS/CARTON

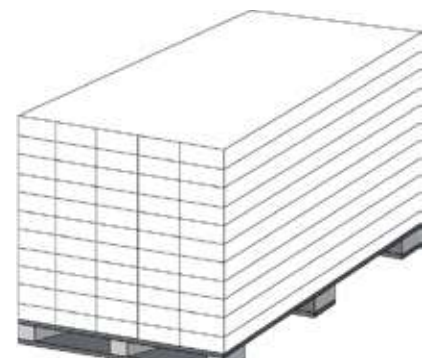

40 CARTONS/PALLET

50.69 LBS/CARTON

2027.6 LBS/PALLET

Artisan Edge


• WATERPROOF • SCUFF & SCRATCH RESISTANT • FADE RESISTANT • STAIN RESISTANT

SPC FLOORING FOR HEAVY COMMERCIAL USE | PUR POLYURETHANE REINFORCEMENT | PRODUCT STANDARD ARTISAN EDGE ASTM F3261

CERTIFICATION & CLASSIFICATION	STANDARD	ARTISAN EDGE
TYPE OF FLOOR COVERING	ASTM F3261 EN 16511	RESILIENT FLOORING IN MODULAR FORMAT WITH RIGID CORE (SPC)
CE CERTIFICATION	EN 14041	YES
CLASSIFICATION	EN ISO 10874	HEAVY TRAFFIC : CLASS 34
TECHNICAL CHARACTERISTICS	STANDARDS	ARTISAN EDGE
TOTAL THICKNESS	EN ISO 24336 (EN 428)	6.50 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	22 MIL WL 0.55 MM
SURFACE TREATMENT	UV TREATED	RQ PROTECT
TOTAL WEIGHT	EN ISO 23997 (EN 430)	51.28 LBS/CARTON = 23.26 KG/CARTON 2051 LBS/PALLET = 930.38 KG/PALLET
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) PLANKS IN CARTON	7" X 60" = 23.62 SF/CARTON 180 mm X 1524 mm = 2.19 M ² /CARTON
	PIECES	8 PIECES PER CARTON
	CARTONS	40 CARTONS / PALLET
	EDGE FINISH	ROLLED BEVEL
TECHNICAL PERFORMANCES	STANDARDS	ARTISAN EDGE
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	< 0.10%
REACTION TO FIRE	EN 13501 - 1	BFL- S1
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	PASS
FURNITURE LEG	EN 424	NO DAMAGE
CASTOR CHAIR	EN ISO 4918 (EN 425)	NO DAMAGE
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	< 2MM PASS
IMPACT SOUND REDUCTION	EN ISO 140-8 EN ISO 717/2	Δ LNW = 21 DB
LIGHT FASTNESS	EN ISO 105 - B02	> GRADE 6
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	GOOD RESISTANCE PASS
SLIP RESISTANCE	DIN51130 EN 13893	R9 CLASS DS
STATIC LOAD	ASTM F970	PASS



ISO 9001
ISO 14001
ISO 18001

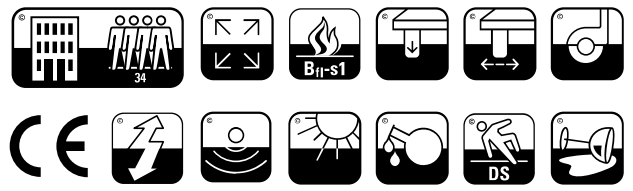

EN 14041

Artisan Edge

• WATERPROOF • SCUFF & SCRATCH RESISTANT • FADE RESISTANT • STAIN RESISTANT

UV SURFACE TREATMENT: Thickness In Microns

- Completely Waterproof
- Super Stain, Scratch & Scuff Resistant
- Fade Resistant

TRANSPARENT WEAR LAYER: 22MIL | 0.55 mm

- Enhances the Color And Embossing
- Protects From Abrasion

OVER ALL THICKNESS: 6.50 mm



FILM LAYER: 0.10 mm

- Elegant Wood Designs
- Natural Looking, Natural Feeling

RIGID CORE: 4.35 mm

- Sturdy Construction
- Dimensional Stability
- UNILIN™ Click System
- Quick And Easy Installation

IXPE Backing: 1.50 mm

- IXPE Backing With Good Grip
- Insulates Sound
- Provides Underfoot Comfort

FEATURES & BENEFITS

APPLICATIONS



100%
Waterproof



Click Installation
No Adhesive



Superior Scratch
& Stain Resistant



No Sub-Floor
Required



Easy
Clean



Corporate
Offices



Residential



Natural Looking
Design



Zero
Maintenance



Superb
Dimensional
Stability



Endures
Medium
Foot Traffic



Excellent
Sound
Insulation



Retail



Hospitality