

ZELLIGE NEO™
GLAZED CERAMIC WALL

MARAZZI
DARE TO BE BOLD™

WALL



ZELLIGE NEO™

Inspired by ancient Moroccan tiles, Zellige Neo blends North African tradition with industrial ceramics. The undulated surface and variation in color tones accentuates the natural imperfections and hand-crafted look of Zellige. Its glossy finish and visible variation creates a blend effect in which the color vibrates strongly. Offered in an array of 10 beautiful shades, these tiles have the power to transform any space.



COVER PHOTO: CARBONE
ABOVE PHOTO: BOSCO



WALL

FINISHES: GLOSSY

USAGE

FLOOR

WALL

COUNTERTOP

SHOWER FLOOR

EXTERIOR FLOOR

MATERIAL

C

PRICING

LOW

HIGH

SPECIAL FEATURES

STEPWISE™

TRUEEDGE™

MADE IN THE U.S.A.

LARGE FORMAT

MOSAIC/DECO

ENCAUSTIC

TERRAZZO

PAVER

CUSTOMIZE

WALL

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

WALL TILE 4 x 4



ZL11 Gesso ZL07 Lana ZL08 Argilla ZL02 Salvia ZL01 Turchese




ZL04 Cielo ZL03 Bosco ZL05 Petrolio ZL06 China ZL12 Carbone

WALL TILE 3 x 12



ZL11 Gesso ZL07 Lana ZL08 Argilla ZL02 Salvia

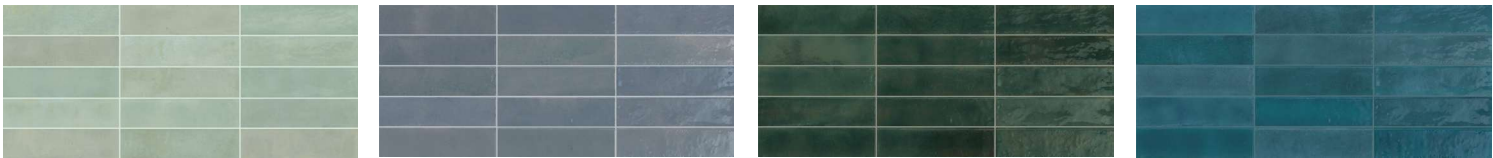

ZL01 Turchese ZL04 Cielo ZL03 Bosco ZL05 Petrolio



ZL06 China ZL12 Carbone

FINISHES: GLOSSY

USAGE

FLOOR

WALL

COUNTERTOP

SHOWER FLOOR

EXTERIOR FLOOR

MATERIAL

C

GLAZED CERAMIC

PRICING

LOW

HIGH

SPECIAL FEATURES

STEPWISE™

TRUEDGE™

MADE IN THE U.S.A.

LARGE FORMAT

MOSAIC/DECO

ENCAUSTIC

TERRAZZO

PAVER

CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	4 x 4 Wall Tile	3-3/4" x 3-3/4" (9.85 cm x 9.85 cm)	5/16" (9.50 mm)	5.67	54
	3 x 12 Wall Tile	3" x 12" (7.65 cm x 30.71 cm)	5/16" (7.75 mm)	12.14	48

TRIM

Description	Number	Size	Shape
Jolly	S1/212J	1/2 x 12	

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors - Standard Center Drain (Residential or Commercial)	≥ 0.42	
Shower Floors - Linear Drain	≥ 0.60	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit marazziusa.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8"	V2 Medium Variation (ZL11 & ZL12)
	V3 High Variation (ZL01, ZL02, ZL03, ZL04, ZL05 & ZL06) (ZL07 & ZL08)*
	V4 Random Variation (ZL07 & ZL08)**

* 3 x 12 tile only.
** 4 x 4 tile only.

PERFORMANCE CHARACTERISTICS

	ASTM#	Wall Result
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120 - 230 lbs
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: marazziusa.com/information/TestResults.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: marazziusa.com/Factors.

FEATURES

PRE-CONSUMER RECYCLED MATERIALS

MADE IN THE U.S.A.

ZEROTOX
Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications. For more information visit marazziusa.com.