

RESPONSIVE 

IMPACT

®

A BETTER FLOOR

ALLURE®

SPC FLOORING



UNILIN™ CLICK SYSTEM | PAINTED BEVEL

RESPONSIVE 

IMPACT
A BETTER FLOOR



A BETTER
FLOOR

PLANK SIZE: 7" x 48" x 5.50 mm

ALLURE®

SPC FLOORING

SIZE: 7" x 48"

EDGE FINISH: PAINTED BEVEL

THICKNESS: 5.50 MM

WEAR LAYER: 22 MIL | 0.55 MM

PIECES: 9 PER BOX

COVERAGE: 21.02 SQ FT / 1.95 M² / CARTON

INTERLOCK: UNILIN® CLICK SYSTEM

ALLURE[®]

SPC FLOORING: UNICLIC / UNIPUSH™ CLICK SYSTEM

SPC FLOORING FOR HEAVY COMMERCIAL USE | PUR Polyurethane Reinforcement | Product Standard ALLURE[®] ASTM F3261-17

CERTIFICATION & CLASSIFICATION	STANDARD	ALLURE [®]
TYPE OF FLOOR COVERING	ASTM F3261 EN 16511	RESILIENT FLOORING IN MODULAR FORMAT WITH RIGID CORE (SPC)
CE CERTIFICATION	EN 14041	YES
CLASSIFICATION	EN ISO 10874	HEAVY TRAFFIC : CLASS 34

TECHNICAL CHARACTERISTICS	STANDARDS	ALLURE [®]
TOTAL THICKNESS	EN ISO 24336 (EN 428)	5.50 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	22 MIL WL 0.55 MM
SURFACE TREATMENT	UV TREATED	PUR
TOTAL WEIGHT	EN ISO 23997 (EN 430)	1.72 LBS / SQ FT = 8.40 KG / m ²
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) PLANKS IN CARTON	7" X 48" = 21.02 SF / CARTON
		178 mm X 1219 mm = 1.95 m ² / CARTON
	PIECES	9 PIECES PER CARTON
	EDGE FINISH	PAINTED BEVEL

TECHNICAL PERFORMANCES	STANDARDS	ALLURE [®]
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	< 0.10%
REACTION TO FIRE	EN 13501 – 1	BFL- S1 PASS
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	REQUIRED VALUE : < 0.10 MM AVERAGE MEASURED VALUE : 0.03 MM
FURNITURE LEG	EN 424	NO DAMAGE
CASTOR CHAIR	EN ISO 4918 (EN 425)	NO DAMAGE
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	< 2MM PASS
IMPACT SOUND REDUCTION	EN ISO 140-8 EN ISO 717/2	Δ LNW = 21 DB
LIGHT FASTNESS	EN ISO 105 – B02	PASS
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	GOOD RESISTANCE PASS
SLIP RESISTANCE	DIN51130 EN 13893	R9 PASS
STATIC LOAD	ASTM F970 / F387	PASS




ISO 9001
ISO 14001
ISO 18001







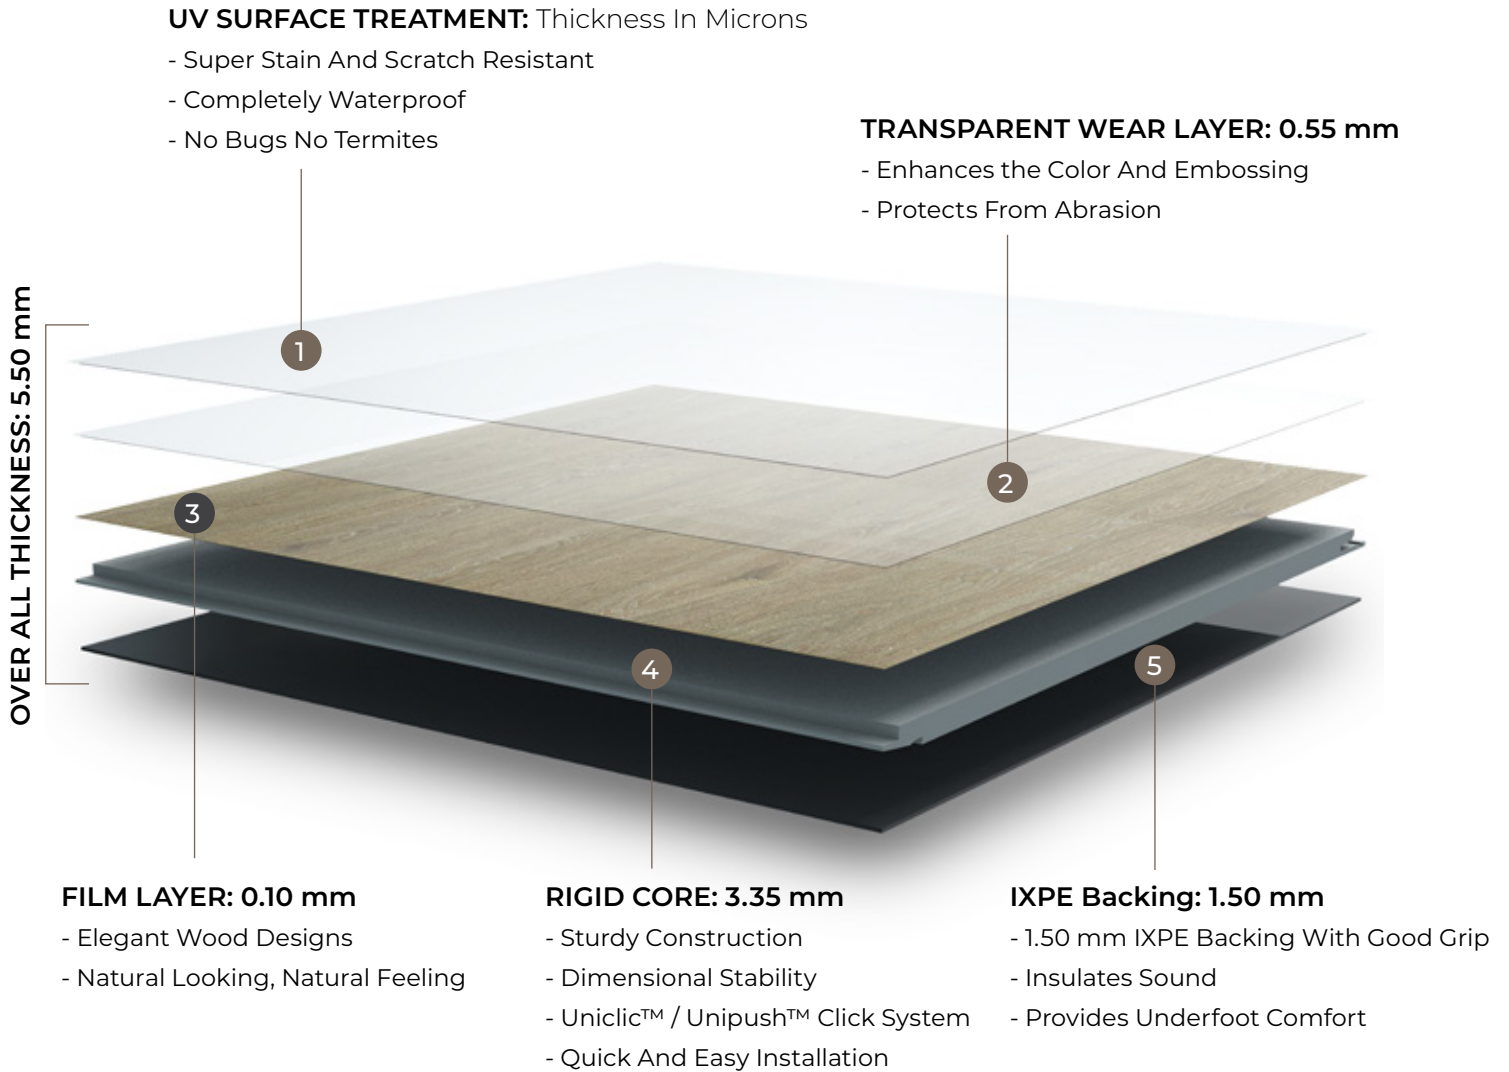







ALLURE





SPC FLOORING: UNICLIC / UNIPUSH™ CLICK SYSTEM



FEATURES & BENEFITS

APPLICATIONS

- 
Superior Scratch & Stain Resistant
- 
No Bugs & Termites
- 
Click Installation
No Adhesive
- 
100% Waterproof
- 
Easy Clean
- 
Multiple Color Combinations
- 
Natural Looking Design
- 
Zero Maintenance
- 
Superb Dimensional Stability
- 
Endures Medium Foot Traffic
- 
Excellent Sound Insulation
- 
No Sub-Floor Required

- 
Corporate Offices
- 
Residential
- 
Retail
- 
Hospitality