




UNIVERSAL 5' TOP RACK



CROSSBAR HARDWARE DIAGRAM

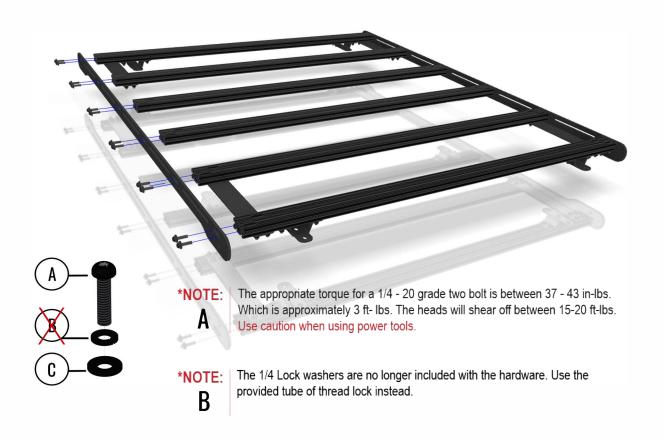


5' TOP RACK CROSSBAR HARDWARE LIST

PART	DESCRIPTION	QUANTITY
A	1/4" - 20 x 1" MACHINE SCREW	24
×	1/4" LOCK WASHER	×
C	1/4" FLAT WASHER	24



STIFFENER BRACE HARDWARE DIAGRAM

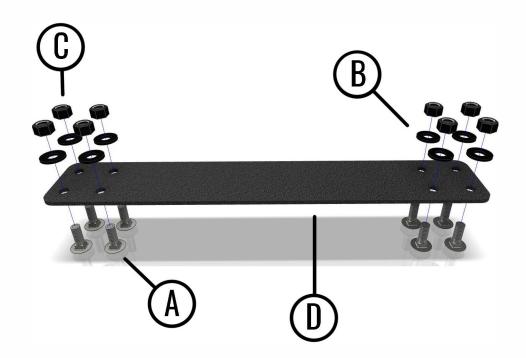

PART	DESCRIPTION	QUANTITY
A	1/4" - 20 X 3/4" CARRIAGE BOLT	32
В	1/4" FLAT WASHER	32
С	1/4" NLYLON LOCK NUT	32
D	STIFFENER BRACKETS	4



STEP 1: IDENTIFY SIZE OF RACK AND # OF MOUNTING FEET

DESCRIPTION:

- THE 5' TOP RACK WILL RECIEVE 4 MOUNTING FEET
- ON SHELLS WHERE THE TRACKS CENTER TO CENTER DISTANCE IS WITHIN 4.6" OF THE CROSS BAR LENGTH (I.E. OVER 42.4" APART FOR A 47" RACK) THE SPECIALTITY SHORTENED MOUNTING FEET WILL BE NEEDED



STEP 2: IDENTIFY PLACEMENT OF MOUNTING FEET

DESCRIPTION:

- THE MOUNTING FEET CAN BE ATTACHED TO BOTH THE FAR FRONT AND FAR REAR CROSS BARS; OR OFFSET IN ONE CROSS BAR ON EACH END DEPENDING ON THE LENGTH OF YOUR TRACKS AND HOW YOU PLAN TO LOAD THE RACK
- FOR ESPECIALLY HEAVY LOADING SCENARIOS ADDITIONAL MOUNTING FEET CAN BE PURCHASED TO MORE EVENLY DISTRIBUTE THE LOAD





STEP 3: ATTACH MOUNTING FEET

DESCRIPTION:


- FIRST INSERT THE CARRIAGE BOLTS INTO THE BOTTOM SIDE OF THE CROSSBAR
- MEASURE THE DISTANCE BETWEEN THE CENTER OF THE TRACKS ON YOUR SHELL. THEN PLACE THE MOUNTING FEET AT THAT DISTANCE ON THE CROSSBARS



STEP 4: ATTACH MOUNTING FEET CONT'D...

DESCRIPTION

- ONCE ALIGNED PLACE THE MOUNTING FEET OVER THE CARRIAGE BOLTS
- NEXT PLACE THE FLAT WASHERS AND FOLLOW WITH THE NYLON LOCK NUTS
- TIGHTEN WITH A 7/16" WRENCH

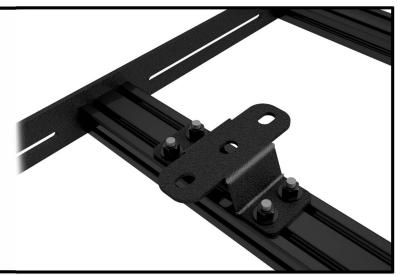




STEP 5: ATTACH STIFFENER BRACES



STEP 6: ATTACH STIFFENER BRACES CONT'D...

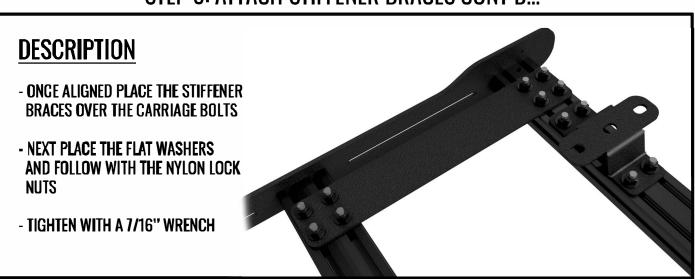



STEP 7: ATTACH SIDE RAILS

DESCRIPTION:

- WITH THE MOUNTING FEET AND STIFFENER BRACES INSTALLED YOU CAN NOW ATTACH THE SIDE RAILS
- TIGHTEN THE SIDE RAILS TO THE CROSSBARS WITH THE SUPLLIED MACHINE SCREWS FOLLOWED BY THE SPLIT LOCK WASHER AND THEN FLAT WASHER. TIGHTEN UNTIL THE LOCK WASHER IS COMPRESSED



*NOTE:

The appropriate torque for a 1/4 - 20 grade two bolt is between 37 - 43 in-lbs. Which is approximately 3 ft- lbs. The heads will shear off between 15-20 ft-lbs. Use caution when using power tools.

STEP 8: ATTACH ROOF RACK TO TRACKS

DESCRIPTION

- SLIDE THE SQUARE "A" PLATES INTO THE TRACK SYSTEM
- EACH MOUNTING FOOT REQUIRES TWO "A" PLATES






STEP 9: DOUBLE CHECK CONNECTIONS

DESCRIPTION:

- BEFORE YOUR FIRST DRIVE DOUBLE CHECK ALL FASTENERS TO ENSURE YOUR ROOF RACK FUNCTIONS CORRECTLY
- PERIODICALLY THERE AFTER CHECK THE FASTNERS TO ENSURE FULL FUNCTIONALITY



ADDITIONAL IMAGES

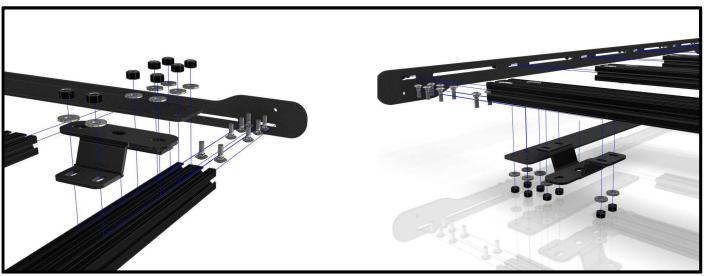



WARRANTY

PRINSU DESIGN STUDIO will warranty all PRINSU DESIGN STUDIO manufactured parts for a LIFETIME of use. This limited Lifetime Warranty is effective for as long as the original retail purchaser owns the product. This warranty terminates when the original retail purchaser sells or otherwise transfers the product to any other person. Each manufactured product must be installed following PRINSU DESIGN STUDIO'S recommended fitment and installation procedures. Any customization or modification to the original product design, functionality, or use, either by said customer or by PRINSU DESIGN STUDIO voids all warranty eligibility. It is the sole discretion of CBI Offroad to determine warranty eligibility. Subject to the limitations and exclusions described in this warranty, PRINSU DESIGN STUDIO will remedy defects in materials or workmanship by repairing or replacing, at its option, a defective product without charge for parts. In addition, PRINSU DESIGN STUDIO may elect, at its option, not to repair or replace a defective product but rather issue to a purchaser a refund equal to the purchase price paid for the product or a credit to be used toward the purchase of a new PRINSU DESIGN STUDIO product. No warranty is given for defects caused by normal wear and tear, cosmetic rust scratches, accidents, unlawful vehicle operation, products used for racing or competition, or modification of, or any types of repair of, a PRINSU DESIGN STUDIO manufactured product. The PRINSU DESIGN STUDIO Warranty does not include the powder coated finish. No warranty is given for defects resulting from conditions beyond PRINSU DESIGN STUDIO'S control including, but not limited to, misuse, neglect, overloading, improperly maintained or failure to assemble, mount or use the product in accordance with PRINSU DESIGN STUDIO'S written instructions or guidelines included with the product or implied use made available to the purchaser.

DISCLAIMER OF LIABILITY REPAIR OR REPLACEMENT OF A DEFECTIVE PRODUCT OR THE ISSUANCE OF A REFUND OR CREDIT (AS DETERMINED BY PRINSU DESIGN STUDIO) IS A PURCHASER'S EXCLUSIVE REMEDY UNDER THIS WARRANTY. DAMAGE TO A PURCHASER'S VEHICLE, CARGO AND/OR TO ANY OTHER PERSON OR PROPERTY IS EXCLUDED. THIS WARRANTY IS EXPRESSLY MADE IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. PRINSU DESIGN STUDIO'S SOLE LIABILITY TO ANY PURCHASER IS LIMITED TO THE REMEDY SET FORTH ABOVE. IN NO EVENT WILL PRINSU DESIGN STUDIO BE LIABLE FOR ANY LOST PROFITS, LOST SALES, OR FOR ANY CONSEQUENTIAL, DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR PUNITIVE DAMAGES OR FOR ANY OTHER DAMAGES OF ANY KIND OR NATURE