


TRANSMISSION SLIP YOKE IDENTIFIER

(574) 287-9650 | South Bend, IN
www.ActionMachineINC.com

ORDER YOUR SLIP YOKE TODAY

USE THIS GUIDE IF YOU DON'T KNOW YOUR TRANSMISSION MODEL OR U-JOINT SIZE.

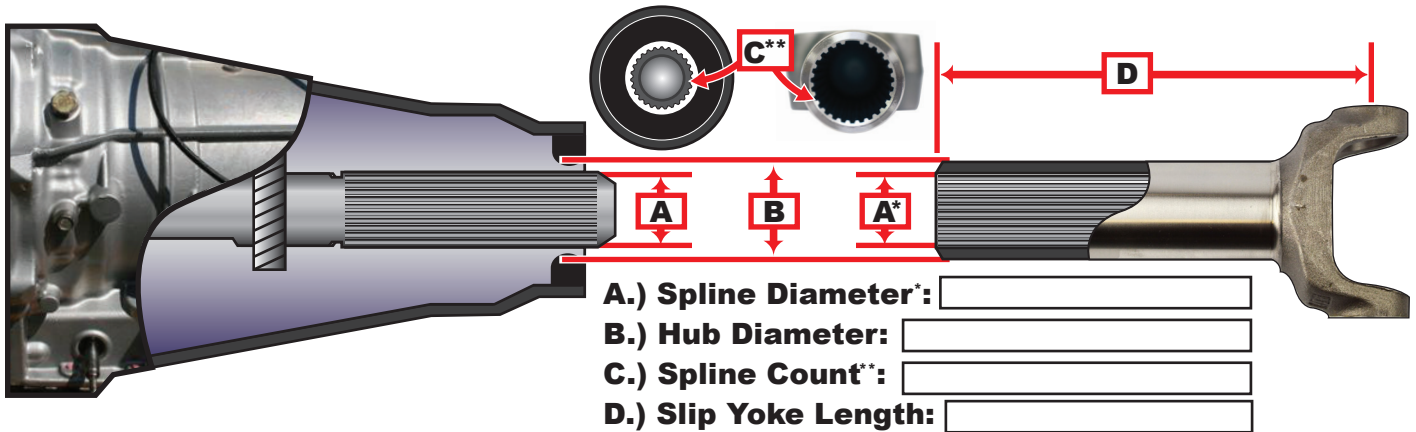

IS THE SLIP YOKE AN OUTSIDE OR INSIDE SNAP RING?
MEASURE BOTH THE WIDTH(F) AND CAP(E) DIAMETER
& MATCH TO THE SERIES OF U-JOINT.

OUTSIDE SNAP RING



E.) Cap Diameter:

F.) Width:

INSIDE SNAP RING



E.) Cap Diameter:

F.) Width (Distance Between Machined Flats):

COMMON U-JOINT SIZES AND SERIES

SERIES	WIDTH (F)	CAP DIA. (E)
1210	2 7/16" = 2.438	1 1/16" = 1.063
1310	3 7/32" = 3.219	1 1/16" = 1.063
1310 Ford***	3 7/32" = 3.219	1 1/8" = 1.125
1330	3 5/8" = 3.625	1 1/16" = 1.063
1330 Ford***	3 5/8" = 3.625	1 1/8" = 1.125
1350	3 5/8" = 3.625	1 3/16" = 1.188
1410	4 3/16" = 4.188	1 3/16" = 1.188
1415****	4.178	1 3/16" = 1.188
1480	4 3/16" = 4.188	1 3/8" = 1.375
1485****	4.178	1 3/8" = 1.375
1550	4 31/32" = 4.969	1 3/8" = 1.375
1555****	4.946	1 3/8" = 1.375

COMMON U-JOINT SIZES AND SERIES

SERIES	WIDTH (F)	CAP DIA. (E)
7260 Chrysler	2 1/8" = 2.125	1 5/64" = 1.078
7290 Chrysler	2 5/8" = 2.625	1 1/8" = 1.125
3R GM	2 9/16" = 2.563	1 1/8" = 1.125

Helpful Resources:

- <http://neapco.mycarparts.net/>
 - <https://www.actionmachineinc.com/collections/transmission-slip-yoke>

Please Note:

* Measure the major diameter(deepest part) inside the slip yoke.
 ** Some slip yokes have blank spaces called blind spots. Count each blind spot as one spline.
 *** 1310 Ford & 1330 Ford have 1 1/8" cap at pinion yoke and 1 1/16" cap at driveshaft.
 **** 1415, 1485, 1555 only found on Chrysler and some GM vehicles with American Axle built driveshafts.