

RIGID Conduit Bodies

TYPE: LB, Threaded
MATERIAL: Copper Free Aluminum
FINISH: Powder Coated

APPLICATIONS:

- Provides access inside raceways for wire pulling, splicing, inspection, and maintenance
- Used to make bends in conduit systems
- Used to change direction of conduit runs

FEATURES:

- Suitable for use in wet locations
- Suitable for use in cement
- NPT tapered hubs

COMPLIANCE:




File No.:
E314478, E244047



Part No	Trade Size	Pcs/ Unit Ctn	Pcs/ Ship Ctn	Wt(lbs)/ 100pcs
80310	1/2"	10	100	22
80320	3/4"	10	50	33
80330	1 "	5	25	53
80340	1-1/4"	2	10	66
80350	1-1/2"	2	10	88
80360	2"	1	5	220
80365	2-1/2 "	-	1	440
80370	3"	-	1	550
80375	3-1/2"	-	1	880
80380	4"	-	1	770

NOMINAL DIMENSIONS (Inches):

Trade Size	A	B	C
1/2"	4.359	1.330	2.060
3/4"	4.972	1.552	2.370
1"	5.819	1.747	2.630
1-1/4"	7.795	2.491	3.500
1-1/2"	7.807	2.491	3.750
2"	9.850	3.123	4.310
2-1/2"	12.673	4.444	4.450
3"	12.583	4.459	4.450
3-1/2"	15.661	5.590	5.800
4"	15.661	5.59	5.800

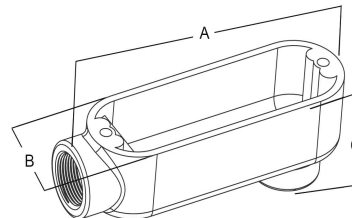

Electrical Resource International
440.878.1199
www.electrical-resource.com