

# E.M.T. Conduit Fittings


Steel



	A	Trade	Pcs/	Pcs/	Wt(lbs)/
Standard	Insulated	Size	Unit Ctn	Ship Ctn	100pcs
40110	50110	1/2"	50	500	11
40120	50120	3/4"	25	250	16
40130	50130	1"	25	100	25
40140	50140	1-1/4"	5	25	43
40150	50150	1-1/2"	-	20	54
40160	50160	2"	-	20	76
40165	50165	2-1/2"	-	10	190
40170	50170	3"	-	10	300
40175	50175	3-1/2"	-	10	330
40180	50180	4"	-	10	360

## NOMINAL DIMENSIONS (Inches):

Trade Size	A	B	C
1/2"	1.772	0.375	0.724
3/4"	1.811	0.375	0.945
1"	2.047	0.440	1.181
1-1/4"	2.480	0.500	1.530
1-1/2"	2.953	0.562	1.758
2"	3.150	0.625	2.215
2-1/2"	3.640	0.769	2.905
3"	4.140	0.915	3.545
3-1/2"	4.380	0.902	4.035
4"	4.640	1.021	4.535

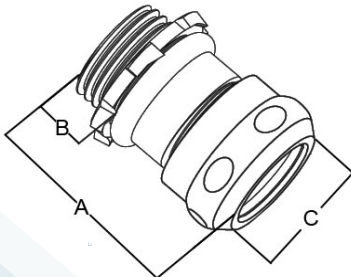

## EMT Connectors

**TYPE:** Compression  
**MATERIAL:** Steel  
**FINISH:** Zinc Electro Plated

### APPLICATIONS:

- Used to connect EMT conduit to boxes or enclosures
- Sizes 2-1/2" - 4" cULus listed for EMT, RIGID, and IMC conduit
- For dry locations
- For Canada: Size 1/2" - 4" are cUL listed rain-tight for wet locations
- Concrete-tight

### FEATURES:

- Available with or without insulated throat liner
- Insulated throat prevents cable stripping
- Male hub threads NPSM

### COMPLIANCE:



File No.:  
E232667, E244047



Electrical Resource International  
 440.878.1199  
[www.electrical-resource.com](http://www.electrical-resource.com)