

Liquid Tight

Zinc Die Cast




Part No	Trade Size	Pcs/ Unit Ctn	Pcs/ Ship Ctn	Wt(lbs)/ 100pcs
24300	3/8"	10	100	20
24310	1/2"	10	100	17
24320	3/4"	10	100	25
24330	1"	5	50	44
24340	1-1/4"	-	10	67
24350	1-1/2"	-	10	92
24360	2"	-	5	140
24365	2 1/2"	-	1	221
24370	3"	-	1	284
24375	3-1/2"	-	1	360
24380	4"	-	1	411

*1/2" K.O.

NOMINAL DIMENSIONS (Inches):

Trade Size	A	B	C	Thread Spec NPT
1/2"	1.44	1.38	0.55	14
3/4"	1.63	1.41	0.56	14
1"	1.88	1.63	0.58	14
1-1/4"	2.13	1.94	0.64	11-1/2
1-1/2"	2.25	2.02	0.66	11-1/2
2"	2.63	2.25	0.77	11-1/2
2-1/2"	3.00	2.47	0.75	11-1/2
3"	5.00	3.34	1.03	8
3-1/2"	4.44	4.78	1.06	8
4"	6.00	5.23	1.19	8

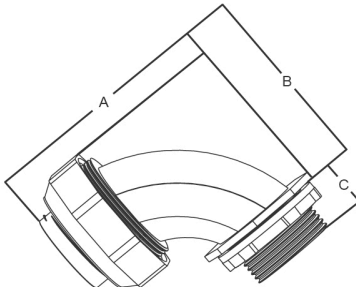

Liquid Tight Connectors

TYPE: 90°
MATERIAL: Zinc Die Cast
FINISH: Vibratory

APPLICATIONS:

- Used to connect flexible metallic liquid tight conduit or Type B flexible non-metallic conduit to a box or enclosure
- For indoor or outdoor locations

FEATURES:

- Includes sealing washer & locknut

COMPLIANCE:



File No.:
E244047



Electrical Resource International
 440.878.1199
www.electrical-resource.com