

# RIGID & IMC Conduit Fittings


Zinc Die Cast



Part No	Trade Size	Pcs/ Unit Ctn	Pcs/ Ship Ctn	Wt(lbs)/ 100pcs
37210	1/2"	10	100	31
37220	3/4"	5	50	37
37230	1"	-	25	62
37240	1-1/4"	-	25	91

## NOMINAL DIMENSIONS (Inches):

Trade Size	A	B
1/2"	1.311	0.992
3/4"	1.385	1.260
1"	1.961	1.516
1-1/4"	2.302	1.900

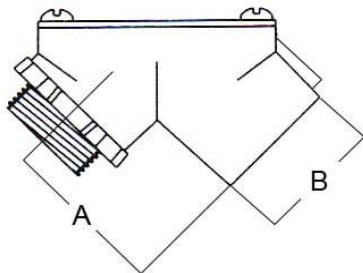

## Pull Elbows

### Rigid/IMC to Box Connectors

**TYPE:** 90°, Threaded with Cover & Gasket

**MATERIAL:** Zinc Die Cast with Aluminum Cover and Neoprene Gasket

**FINISH:** Vibratory

### APPLICATIONS:

- Used to connect threaded RIGID/IMC conduit to a box or enclosure to create a 90° turn in a run when bending conduit not feasible
- For use in wet or dry locations (RIGID Only)
- May be used with EMT, dry locations only

### FEATURES:

- Removable cover promotes easy wire pulling
- Includes Zinc Die Cast locknut with gasket
- Includes Aluminum cover, Neoprene cover gasket and (2) slotted cover screws

### COMPLIANCE:



File No.:  
E244047



Electrical Resource International  
[www.electrical-resource.com](http://www.electrical-resource.com)  
440.978.1199