

RIGID/IMC 45° Elbows

MATERIAL: Hot Dipped Galvanized Steel

APPLICATIONS:

- Used on conduit raceways to interconnect conduit runs and other fittings
- Used to change conduit direction
- For indoor use only

FEATURES:

- Large radius allows for easy wire pulling
- Provides mechanical protection for conductors

COMPLIANCE:




File No.:
E322204



Part No	Trade Size	Pcs/ Unit Ctn	Pcs/ Ship Ctn	Wt (lbs) / 100pcs
47310	1/2"	-	50	70
47320	3/4"	-	50	112
47330	1"	-	25	192
47340	1-1/4"	-	20	320
47350	1-1/2"	-	15	413
47360	2"	-	10	670
47365	2-1/2"	-	80	1200
47370	3"	-	50	1900
47375	3-1/2"	-	50	2800
47380	4"	-	36	3100
47385	5"	-	1	6800
47390	6"	-	1	11400

NOMINAL DIMENSIONS (Inches):

Trade Size	T Tangent (Min)	R Radius (Min)
1/2"	1.496	4.015
3/4"	1.496	4.488
1"	1.889	5.748
1-1/4"	2.007	7.244
1-1/2"	2.007	8.267
2"	2.007	9.488
2-1/2"	2.992	10.51
3"	3.110	12.99
3-1/2"	3.267	15.00
4"	3.385	15.98
5"	3.625	24.00
6"	3.750	30.00

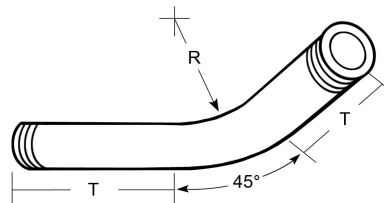

Electrical Resource International
www.electrical-resource.com
440.978.1199