


Stainless Steel

RIGID Nipples

Quick Reference by Part Number & Size

Material & Finish:

Stainless Steel, Type 304 or Type 316

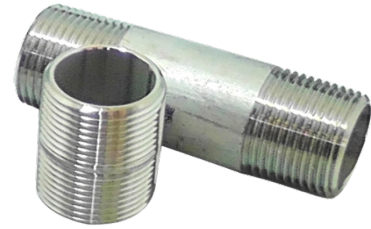

Application:

- Used to connect two steel outlet boxes or metal enclosures.
- Used to extend a length of threaded Rigid conduit.

Features:

- Corrosion resistant at extreme temperatures to most industrial environments.

Add "- 304" after part number for SS Type 304 & "-316" for SS Type 316

TRADE SIZE	O.D.	LENGTH											
		CLOSE	1-1/2"	2"	2-1/2"	3"	3-1/2"	4"	5"	6"	8"	10"	12"
1/2"	0.840	77410	77411	77412	77413	77414	77415	77416	77418	77510	77511	77512	77513
3/4"	1.02	77420	77421	77422	77423	77424	77425	77426	77428	77520	77521	77522	77523
1"	1.32	77430		77432	77433	77434	77435	77436	77438	77530	77531	77532	77533
1-1/4"	1.660	77440		77442	77443	77444	77445	77446	77448	77540	77541	77542	77543
1-1/2"	1.900	77450		77452	77453	77454	77455	77456	77458	77550	77551	77552	77553
2"	2.38	77460			77463	77464	77465	77466	77468	77560	77561	77562	77563
2-1/2"	2.88	77660				77664	77665	77666	77667	77760	77761	77762	77763
3"	3.500	77470				77474	77475	77476	77478	77570	77571	77572	77573
3-1/2"	4.000	77670						77676	77678	77770	77771	77772	77773
4"	4.500	77480						77486	77488	77580	77581	77582	77583
5"	5.56	77880								77888	77980	77981	77982
6"	6.63	77876								77498	77590	77591	77592

Compliance: UL 6A, ANSI C805



RIGID Nipples

Page 1 of 2



Material & Finish:

Stainless Steel, Type 304 or Type 316

Application:

- Used on conduit raceways to interconnect conduit to change direction.
- Used on conduit raceways to interconnect conduit runs and other fittings.

Features:

- Corrosion resistant at extreme temperatures to most industrial environments.

Add "- 304" after part number for SS Type 304

Add "- 316" after part number for SS Type 316

Part No.	Length	Pcs/ Unit Ctn	Pcs/ Ship Ctn	Wt.(lbs)/ 100 pcs
Trade Size 1/2" O.D.: 0.84				
77410	Close	25	250	6
77411	1-1/2"	25	250	8
77412	2"	25	250	12
77413	2-1/2"	25	250	15
77414	3"	25	250	19
77415	3-1/2"	25	150	22
77416	4"	25	150	25
77418	5"	-	25	30
77510	6"	-	25	40
77511	8"	-	25	39
77512	10"	-	25	53
77513	12"	-	25	80
Trade Size 3/4" O.D.: 1.015				
77420	Close	25	250	9
77421	1-1/2"	25	250	9
77422	2"	25	250	14
77423	2-1/2"	25	150	17
77424	3"	25	150	24
77425	3-1/2"	25	150	28
77426	4"	-	25	33
77428	5"	-	25	40
77520	6"	-	25	51
77521	8"	-	25	72
77522	10"	-	25	84
77523	12"	-	25	104

Length Tolerances: +/- 1/16" (1.59mm)

Part No.	Length	Pcs/ Unit Ctn	Pcs/ Ship Ctn	Wt.(lbs)/ 100 pcs
Trade Size 1" O.D.: 1.315				
77430	Close	25	150	16
77432	2"	25	150	22
77433	2-1/2"	-	25	27
77434	3"	-	25	35
77435	3-1/2"	-	25	41
77436	4"	-	25	48
77438	5"	-	25	63
77530	6"	-	25	76
77531	8"	-	25	107
77532	10"	-	25	138
77533	12"	-	25	151
Trade Size 1-1/4" O.D.: 1.660				
77440	Close	-	25	22
77442	2"	-	25	27
77443	2-1/2"	-	25	34
77444	3"	-	25	46
77445	3-1/2"	-	25	55
77446	4"	-	25	65
77448	5"	-	25	80
77540	6"	-	25	98
77541	8"	-	25	133
77542	10"	-	25	182
77543	12"	-	25	208

Weights are nominal, subject to change without notice.

Compliance: UL 6A, ANSI C805



Stainless Steel

RIGID Nipples

Page 2 of 2

Add "- 304" after part number for SS Type 304

Add "- 316" after part number for SS Type 316

Part No.	Length	Pcs/ Unit Ctn	Pcs/ Ship Ctn	Wt.(lbs)/ 100 pcs
Trade Size 1-1/2" O.D.: 1.900				
77450	Close	-	25	27
77452	2"	-	25	33
77453	2-1/2"	-	25	42
77454	3"	-	25	55
77455	3-1/2"	-	25	68
77456	4"	-	25	78
77458	5"	-	25	97
77550	6"	-	25	120
77551	8"	-	25	167
77552	10"	-	25	194
77553	12"	-	25	250
Trade Size 2" O.D.: 2.375				
77460	Close	-	25	43
77463	2-1/2"	-	25	42
77464	3"	-	25	71
77465	3-1/2"	-	25	82
77466	4"	-	25	101
77468	5"	-	25	132
77560	6"	-	25	157
77561	8"	-	12	216
77562	10"	-	10	285
77563	12"	-	10	334
Trade Size 2-1/2" O.D.: 2.775				
77660	Close	-	10	84
77664	3"	-	10	98
77665	3-1/2"	-	10	120
77666	4"	-	10	147
77667	5"	-	10	197
77760	6"	-	10	235
77761	8"	-	10	322
77762	10"	-	5	422
77763	12"	-	5	493

Weights are nominal, subject to change without notice.

Length Tolerances: +/- 1/16" (1.59mm)

Part No.	Length	Pcs/ Unit Ctn	Pcs/ Ship Ctn	Wt.(lbs)/ 100 pcs
Trade Size 3" O.D.: 3.500				
77470	Close	-	10	116
77474	3"	-	10	130
77475	3-1/2"	-	10	157
77476	4"	-	10	196
77478	5"	-	10	260
77570	6"	-	10	294
77571	8"	-	5	403
77572	10"	-	5	528
77573	12"	-	5	652
Trade Size 3-1/2" O.D.: 4.000				
77670	Close	-	10	223
77676	4"	-	6	235
77678	5"	-	6	329
77770	6"	-	5	366
77771	8"	-	3	500
77772	10"	-	3	656
77773	12"	-	3	788
Trade Size 4" O.D.: 4.500				
77480	Close	-	10	176
77486	4"	-	6	279
77488	5"	-	6	380
77580	6"	-	5	431
77581	8"	-	3	588
77582	10"	-	3	775
77583	12"	-	3	915
Trade Size 5" O.D.: 5.563				
77880	Close	-	1	359
77888	5"	-	1	513
77980	6"	-	1	588
77981	8"	-	1	809
77982	10"	-	1	1027
77983	12"	-	1	1232
Trade Size 6" O.D.: 6.625				
77776	Close	-	1	402
77498	5"	-	1	670
77590	6"	-	1	804
77591	8"	-	1	1104
77592	10"	-	1	1341
77593	12"	-	1	1610

Compliance: UL 6A, ANSI C80.5

