

Hot-Dipped Galvanized Steel


Rigid Couplings

Material & Finish:

Hot-Dipped Galvanized Steel

Application:

·Used for joining threaded RIGID conduit together.

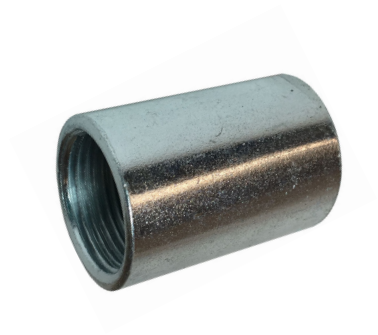

| Part No. | Trade Size | | Length (A) | | Outside Diameter (B) | | Threads per in/mm | | Weight/ 100 pcs | | Pcs/Ship Carton |
|----------|------------|--------|------------|-------|----------------------|-------|-------------------|-----|-----------------|-----|-----------------|
| | US | Metric | in | mm | in | mm | in | mm | lb | kg | |
| 47110 | 1/2" | 16 | 1.63 | 41.30 | 1.01 | 25.7 | 14.0 | 356 | 12 | 5 | 100 |
| 47120 | 3/4" | 21 | 1.64 | 41.70 | 1.25 | 31.8 | 14.0 | 356 | 18 | 8 | 50 |
| 47130 | 1" | 27 | 1.97 | 50.00 | 1.53 | 38.7 | 11.5 | 305 | 30 | 14 | 30 |
| 47140 | 1-1/4" | 35 | 2.03 | 51.60 | 1.87 | 47.5 | 11.5 | 305 | 37 | 17 | 25 |
| 47150 | 1-1/2" | 41 | 2.06 | 52.40 | 2.16 | 54.7 | 11.5 | 305 | 52 | 24 | 25 |
| 47160 | 2" | 53 | 2.13 | 54.00 | 2.65 | 67.3 | 11.5 | 305 | 72 | 33 | 20 |
| 47165 | 2-1/2" | 63 | 3.19 | 81.00 | 3.25 | 82.6 | 8.0 | 203 | 170 | 77 | 24 |
| 47170 | 3" | 78 | 3.31 | 84.10 | 3.87 | 98.3 | 8.0 | 203 | 210 | 95 | 18 |
| 47175 | 3-1/2" | 91 | 3.41 | 86.50 | 4.50 | 114.3 | 8.0 | 203 | 340 | 154 | 12 |
| 47180 | 4" | 103 | 3.52 | 89.30 | 4.88 | 123.8 | 8.0 | 203 | 300 | 136 | 10 |
| 47185 | 5" | 129 | 3.95 | 100.4 | 6.00 | 152.4 | 8.0 | 203 | 475 | 216 | 1 |
| 47190 | 6" | 155 | 4.25 | 108.0 | 7.20 | 182.9 | 8.0 | 203 | 765 | 347 | 1 |

Dimensions & weights are nominal, subject to change without notice.

Compliance: UL 6, ANSI C801

File No: E468552

