

PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE ATTEMPTING INSTALLATION

The pure water faucet may be installed on any flat surface over 50mm (2") in diameter. Remember to check the underside of the benchtop location for interference.

IMPORTANT: The following instructions are general in nature and may vary from tap to tap. These instructions are **not** for stone or granite benchtops.

Step by Step Instructions

1. Select a location for your new faucet: your faucet may be installed on any flat surface over 50mm (2") in diameter. It is recommended to make a small indent using a centre punch to mark the desired drilling location.
2. Drill a hole for the faucet - First drill a 3mm pilot hole. Then drill a 12mm final hole.
3. Assemble the faucet fittings according to your chosen faucet - refer to Diagram 1 or 2. Tighten firmly, ensuring that the faucet is correctly aligned in the desired direction over the sink basin.
4. Install female Quick Fit Connector to the end of the faucet and connect tube (refer to Diagram 3).

Diagram 1

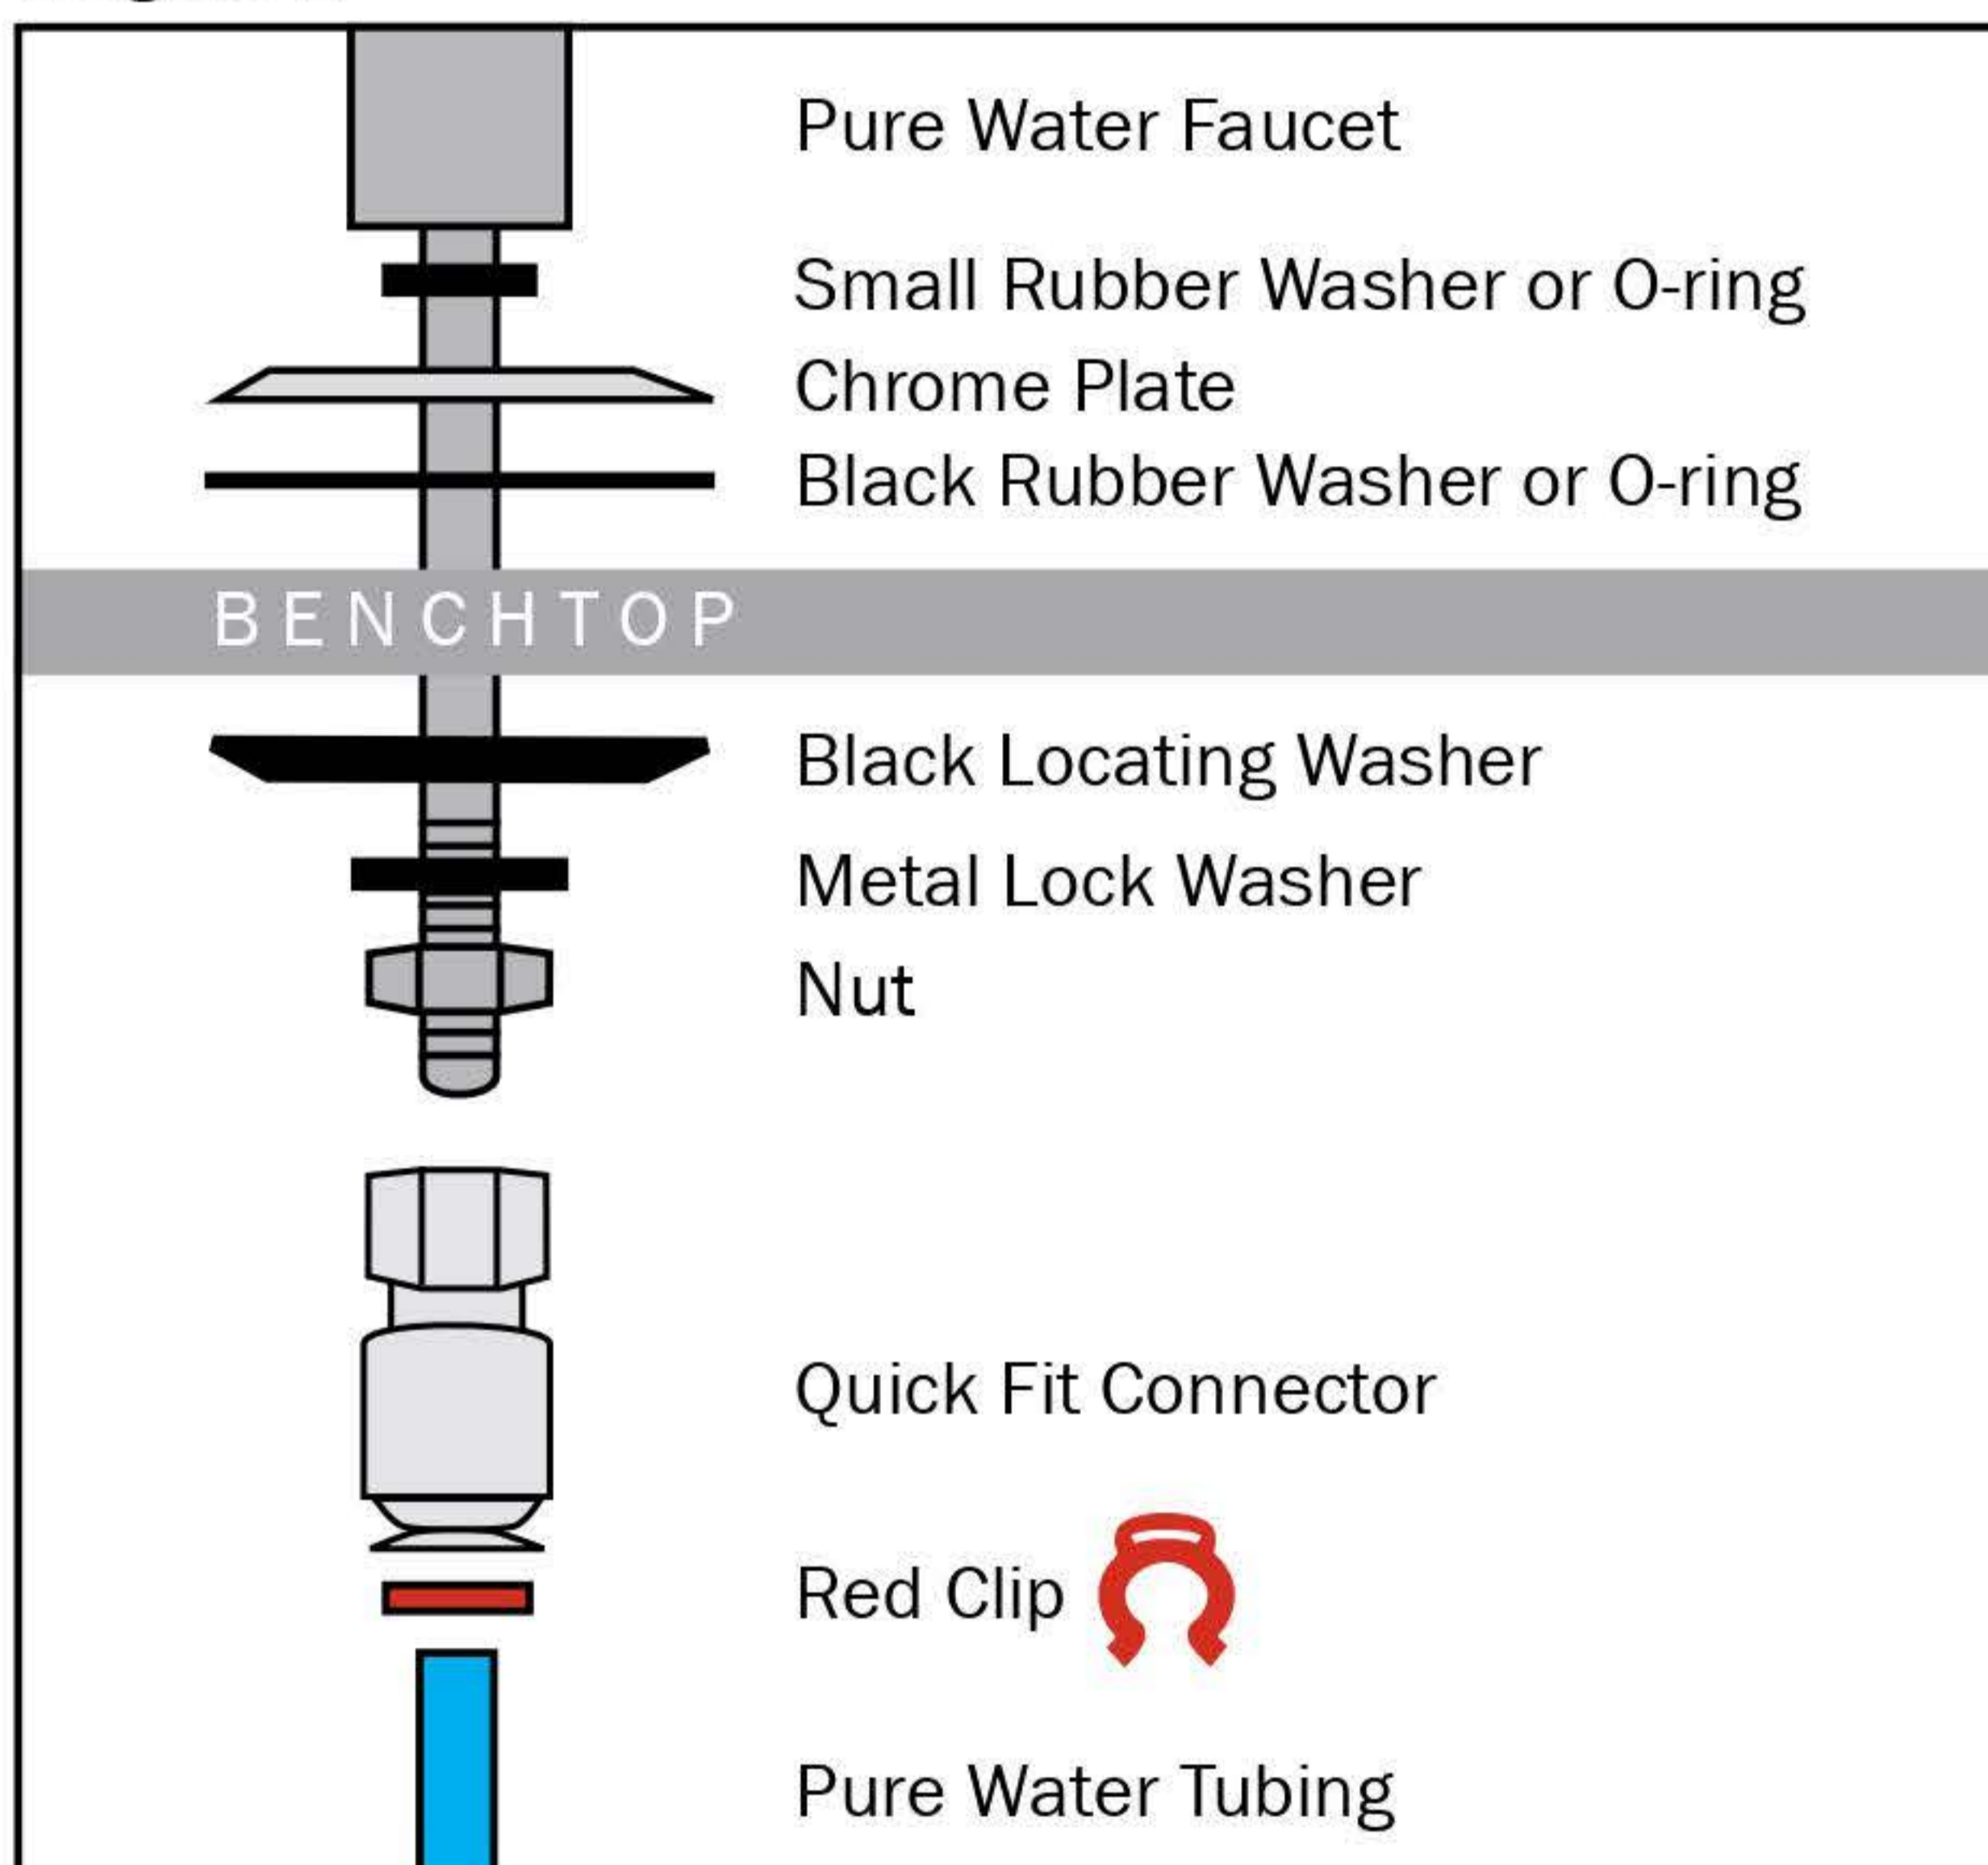


Diagram 2



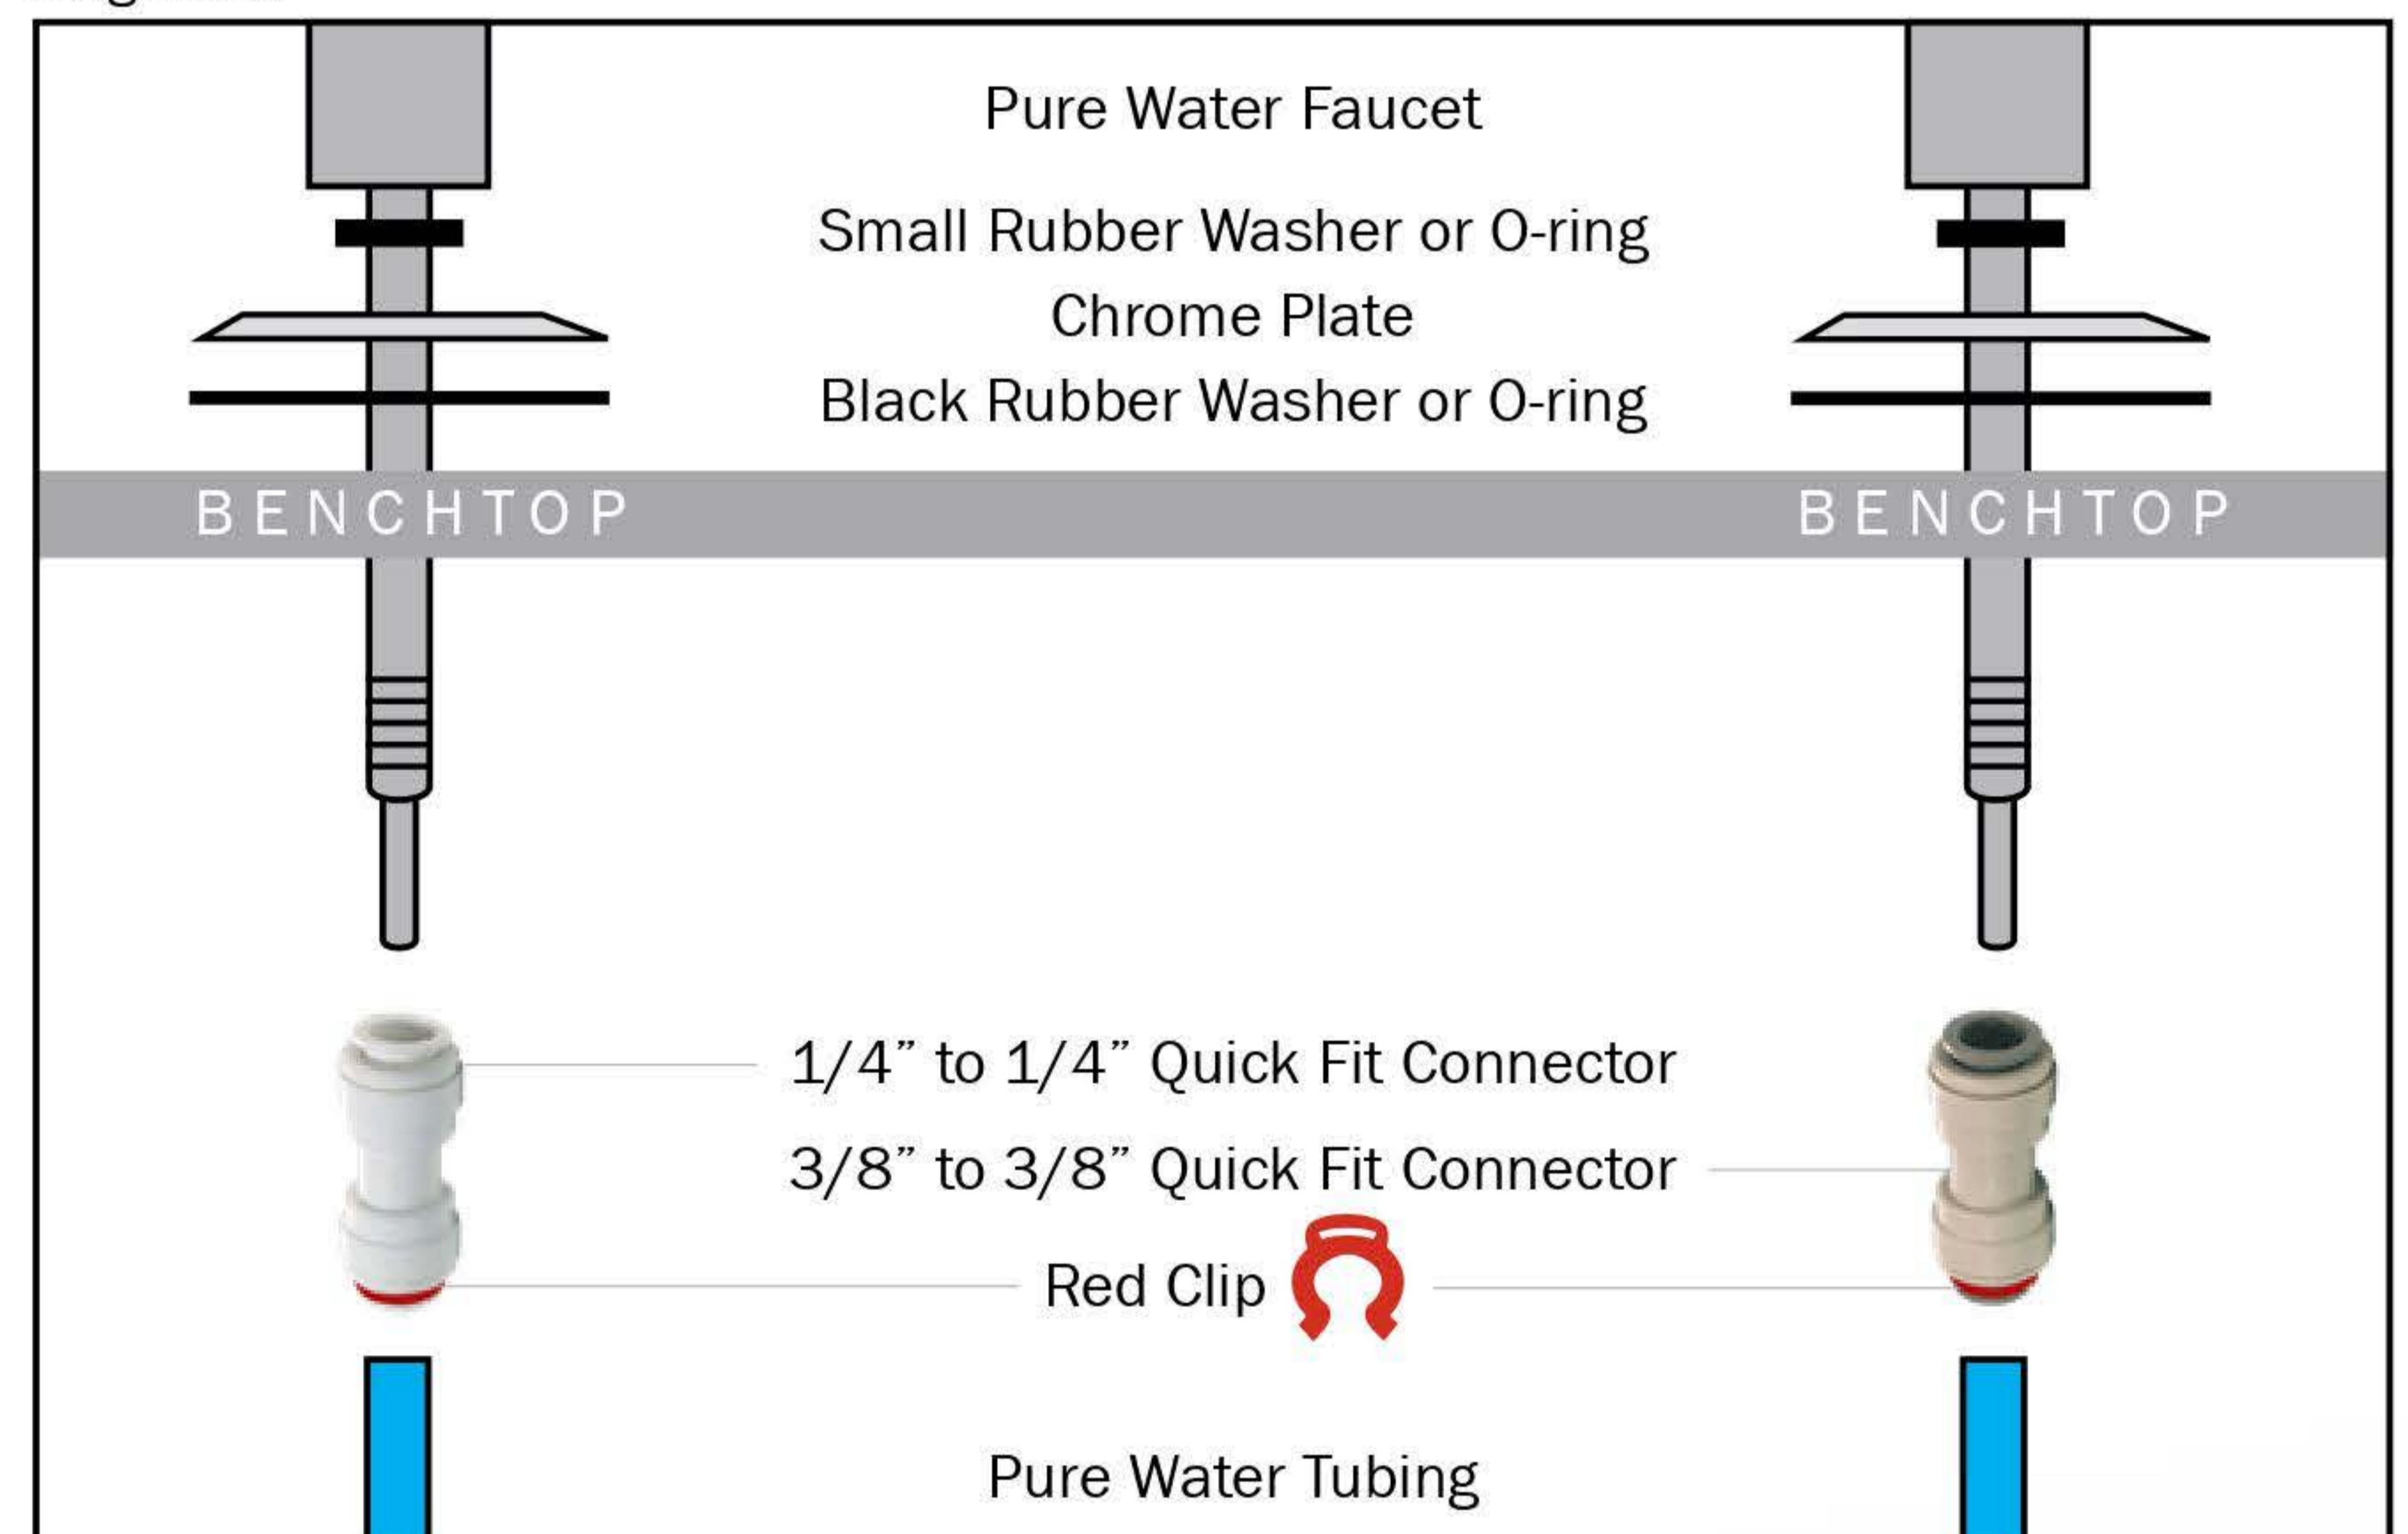



Diagram 3

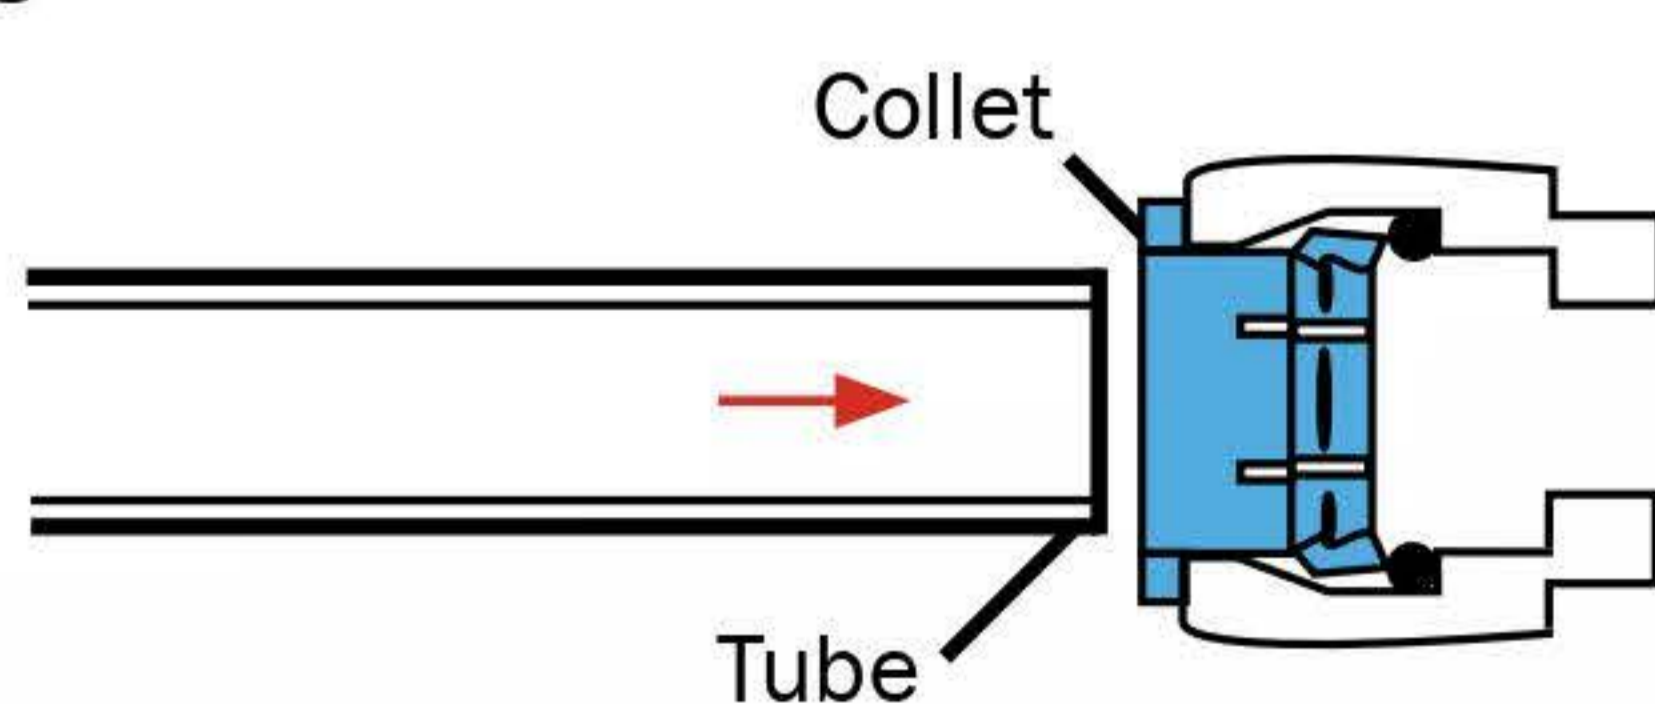

1. To make the connection, push the tube firmly into the collet.

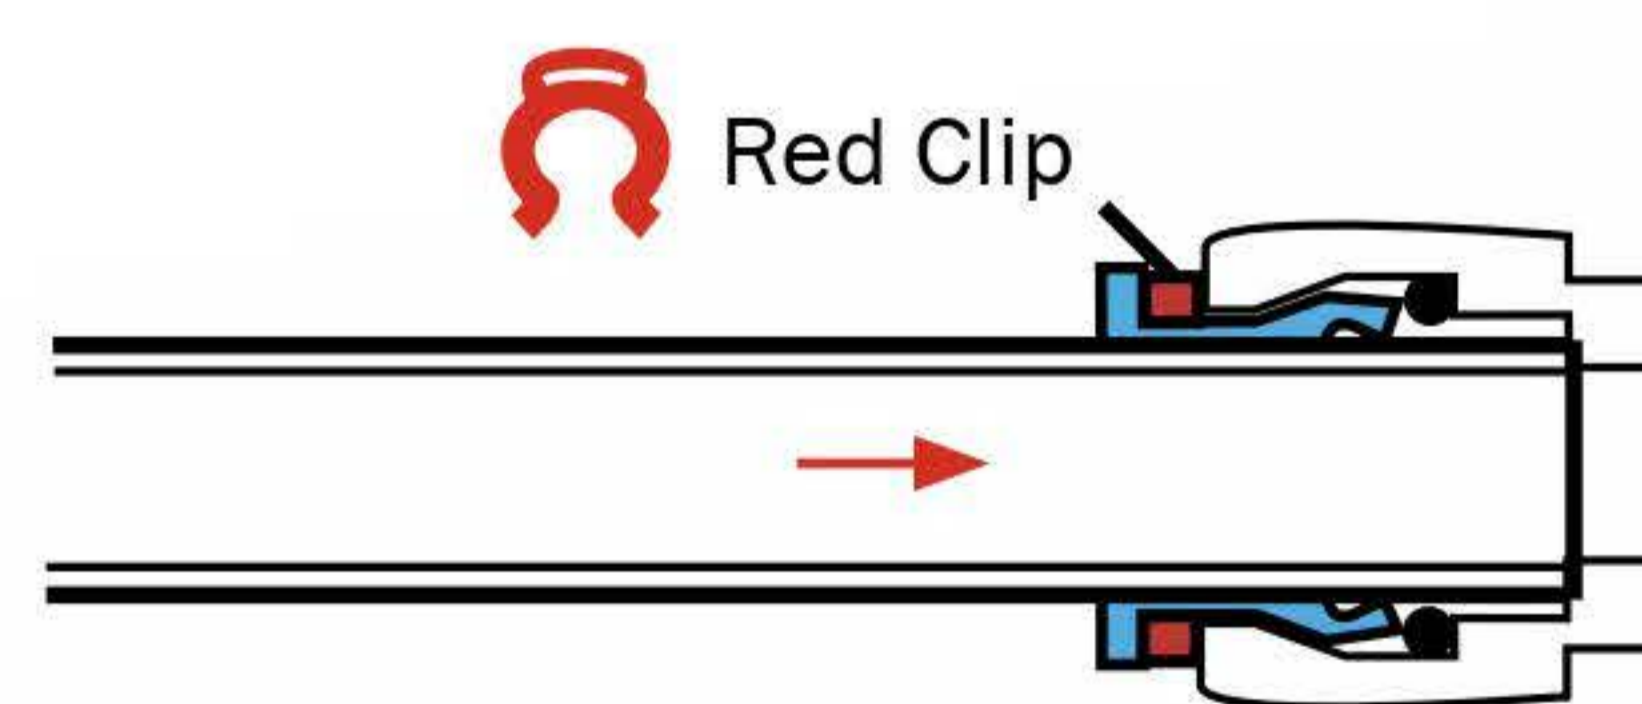

2. Make sure the tube is pushed as far as it can go and secure with a John Guest red clip.

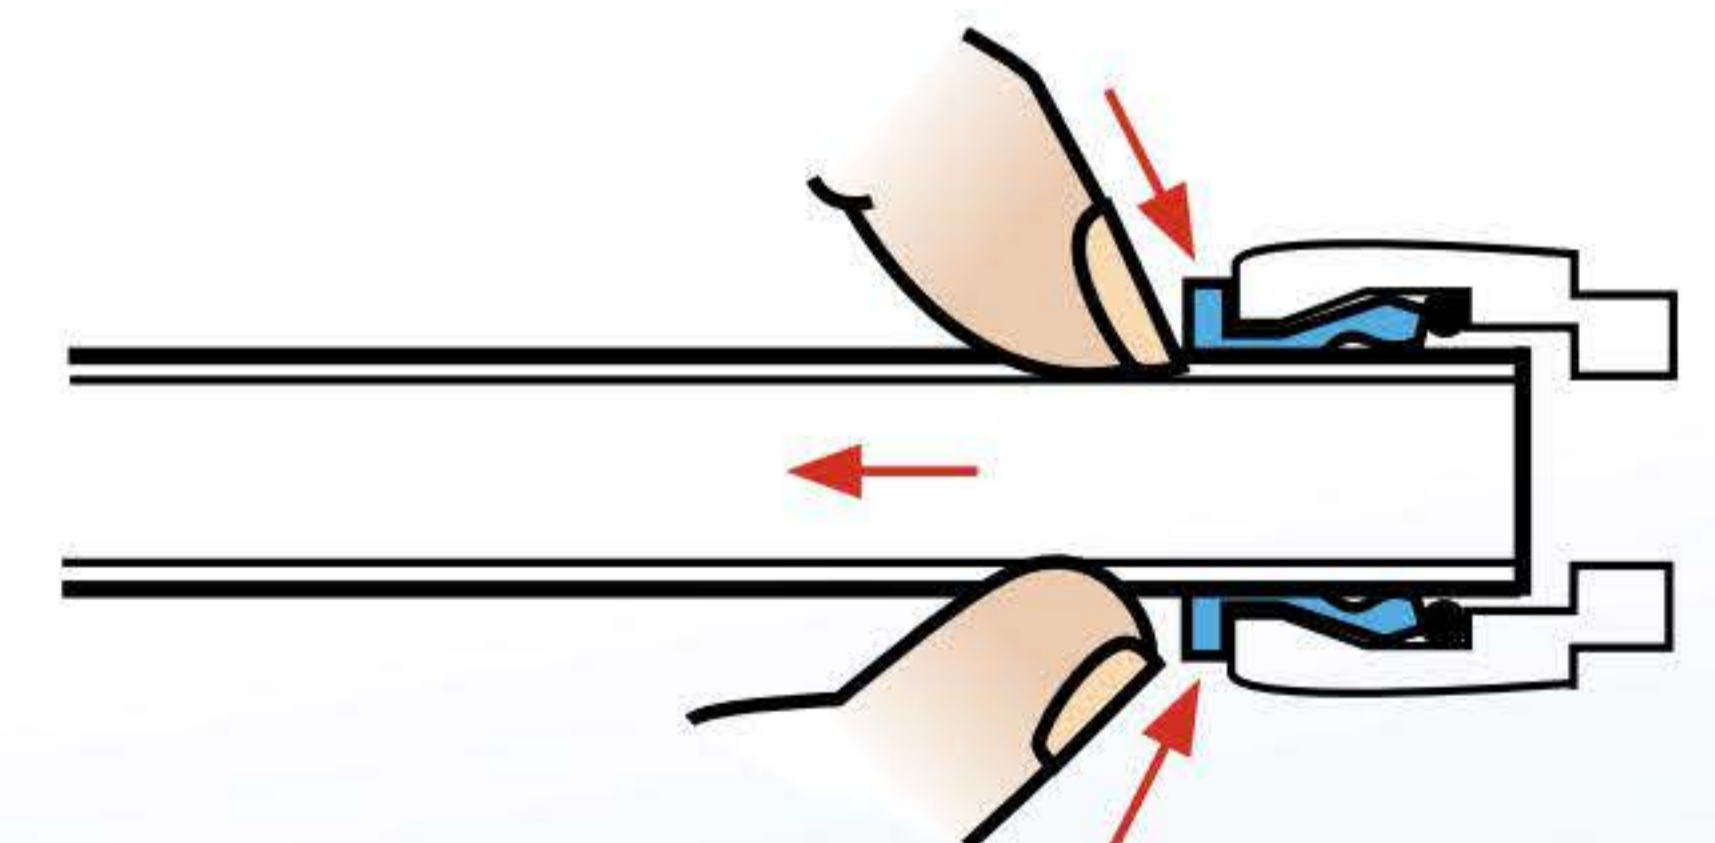

3. To remove the tube - First remove the red clip. Use two fingers to push onto the collet and at the same time pull out the tube.